

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com

Customer Name:
Project Name:
Fixture Type:





GE
Lighting

47725 - 120R40FL/STG PQ6

GE Indoor Floodlight Soft White Saf-T-Gard® BR40 - Shatter-Resistant

- Use original GE's Soft White when you need a light without glare and harsh shadows.
- Replace ordinary light bulbs with GE Flood and Spotlight in all your track and recessed lighting fixtures.

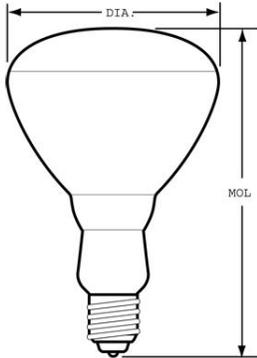

GENERAL CHARACTERISTICS

Lamp Type	Incandescent - Reflector
Bulb	BR40
Base	Medium Screw (E26)
Filament	CC-6
Wattage	120
Voltage	130
Rated Life	1700 hrs
Primary Application	Indoor Floodlight; Shatter-Resistant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1550
Center Beam Candlepower (CBCP)	1200
Nominal Initial Lumens per Watt	12

DIMENSIONS

Maximum Overall Length (MOL)	6.5600 in(166.6 mm)
Bulb Diameter (DIA)	5.000 in(127.0 mm)
Bulb Diameter (DIA) (MAX)	5.000 in(127.0 mm)

PRODUCT INFORMATION

Product Code	47725
Description	120R40FL/STG PQ6
Standard Package	BUNDLE
Standard Package GTIN	00043168477253
Standard Package Quantity	30
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	30
UPC	043168274289

CAUTIONS & WARNINGS

Warning

- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

NOTES

- Burning position - base up.
- Will operate in any burning position, but fixed-socket usage other than base up or continuous burning in any position in ambient temperatures above 150 degrees F (66 degrees C), may result in some loss of protective coating. Reflectors and accessories may