

PHILIPS

Sensors

EasyAir

SNS200



Datasheet

EasyAir SNS200

The Philips EasyAir SNS200 is the ideal solution for per-luminaire control of new light luminaires. It combines occupancy sensing, daylight harvesting and task tuning in a single, compact package for easy OEM luminaire assembly. EasyAir SNS200 operates with the established Xitanium SR driver standard to make a simple two-wire connection between sensor and driver, thus eliminating the need for multiple components and auxiliary devices. The result is a cost effective and easy-to-design-in solution ideal for energy-savings. An intuitive app makes configuration and commissioning during and after installation fast and easy using Philips Field Apps.

Features

- Occupancy sensing, daylight harvesting and task tuning in one device
- Compact size, 2-wire connection
- Operates with Philips Xitanium SR drivers and qualified wireless switches
- Preset with most common sensor parameters
- Configuration of sensor parameters– if desired – using NFC or IR via intuitive Android-based Philips Field Apps
- Simple grouping of luminaires to a wireless switch with Philips Field Apps

Benefits

- Combines functionality to reduce need for multiple components
- Fits into existing and new-design luminaires
- Quick task tuning in the field to optimize light and power levels
- Enables auto-off/manual-on application
- Cost-effective solution for energy-savings
- 5-year limited system warranty with Philips Xitanium LED drivers
- Configuration and commissioning from the floor

Applications

- Conference rooms
- Individual offices
- Open offices
- Classrooms
- Storage and break areas
- Restrooms
- Lobbies
- Stairways

Ordering Information

Commercial product name	Colour	Description	EOC	12NC	Carton Quantity
EasyAir SNS200/w	White	Office Sensor Advanced Grouping	8718696 698945 00	9290 007 66803	50 pcs
EasyAir SNS200/g	Grey	Office Sensor Advanced Grouping	8718696 712412 00	9290 005 60703	50 pcs
EasyAir SNS200/b	Black	Office Sensor Advanced Grouping	871869959684200	9290 016 51206	50 pcs

Product Data

All specifications are typical and at 25 °C Tcase unless otherwise specified.

Physical Information

Overall Dimensions	50 mm x 19.0 mm x 31.5 mm
Housing (Luminaire Hole)	44 mm x 17 mm (l x w)
Net Weight per Piece	17 gr
Volume required Inside Luminaire (LxWxH)	50 mm x 19 mm x 24 mm
Color	White and Grey
Connectors	(2) Lite-Trap connectors
Input wire cross-section (solid conductor wire)	0.25 - 0.75 mm ²
	18 - 24 AWG
Input wire cross-section (stranded wire)	0.3 - 0.5 mm ²
	20 - 22 AWG

Electrical Information

Input Voltage	Powered by SR driver low-voltage interface
Current Consumption	13 mA
Nominal Power Consumption	200 mW
Standby Power	< 1 W on luminaire level, including driver standby power

Occupancy Sensing

Type	Passive infrared (PIR)
Occupancy Based Control	Default enabled
Occupancy Mode	Auto-on/off, Manual-on/off, Manual-on/auto-off; Red LED indicates "on"
Group Occupancy Sharing	Enabled/disabled
Group light behaviour	Background light level, Field task level
Eco-On Level	5 - 100%
Hold Time	0.5 - 60 minutes
Viewing Angle	X = 72°, Y = 86° (See detection pattern)
Background Light Level	0-100%
Prolong Time	0 minutes - infinity
Grace Fading	0-25 sec
Response Time/Fading to Switch On/Off	0.7 sec

Daylight Sensing

Daylight based control	Default enabled
Auto-calibration	Upon power-up
Daylight dependent switching	Default disabled
Daylight dependent override	Default disabled
Viewing Angle	40° (half value sensitivity); 2% cut-off point at 75°

Task Tuning

Field Task Level	0-100%
------------------	--------

Environment & Approbation


Operating Ambient Temperature Range	0 °C to 55 °C
Operating Humidity	0 - 95% non condensing
Storage Temperature	-25 °C to 85 °C
Storage Humidity	0-95% non condensing
Ingress Protection	IP20
Max Case Temperature (Tcase)	55 °C
Agency Approbations	CE, ENEC, RTTE, EMC
Warranty	5 years warranty for released Philips system combination (sensor and compatible driver).
Digital Interface	Xitanium SR

Other

Status Indicators	Red, Yellow. Yellow LED on: Vacancy & Sensor is functional; Red LED on: Motion is detected
Energy reporting	Calculated from last "power on": % On, Energy Consumed (Whr), System on time (hrs), Avg power consumed
No. Drivers per Sensor	4 max
Max Distance Switch-to-First-Luminaire	10 m line-of-sight
Max Distance Luminaire-to-Luminaire	12 m line-of-sight
No. Switches per Group	10 max
Field Configuration	via NFC or IR, parameters set via Philips Field Apps


EasyAir SNS200

Sensor Dimensions (mm)

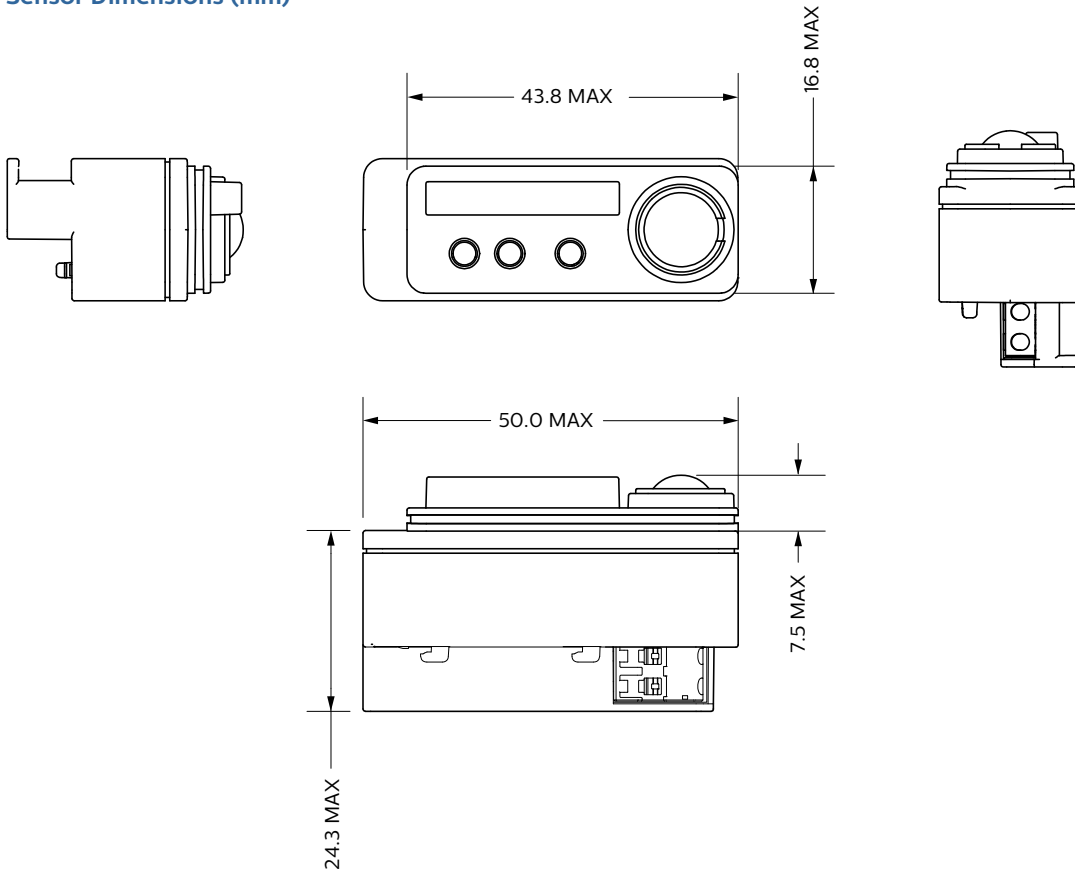


Mounting Dimensions (mm)

Mounting in U-shaped slot in sheet metal (max thickness 1 mm), tolerance +0.2 mm/-0.0 mm

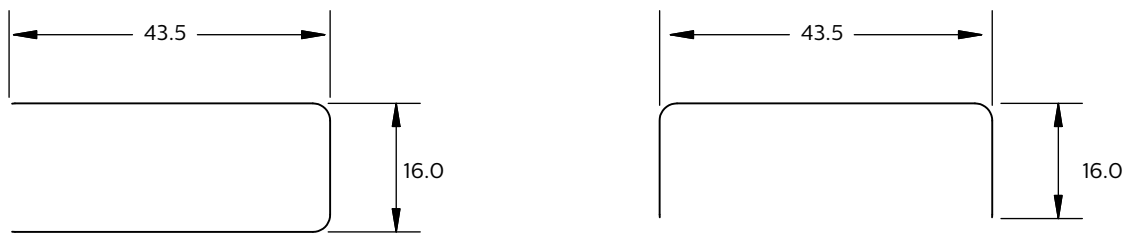







Mounting in cut-out in sheet metal (thickness 0.7 mm to 1.2 mm), tolerance +/-0.2 mm

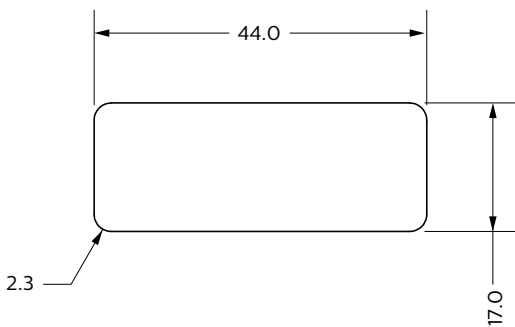

Mounting in a bracket (SMB-50)

Accessories	Colour	12NC
EasyAir SNS200 SMB-50/w	White	929001540206
EasyAir SNS200 SMB-50/g	Grey	929001540306

The EasyAir SNS200 can be mounted in a bracket (SMB 50). Refer the figures for details on mounting and design-in into luminaire. All dimensions are in mm.

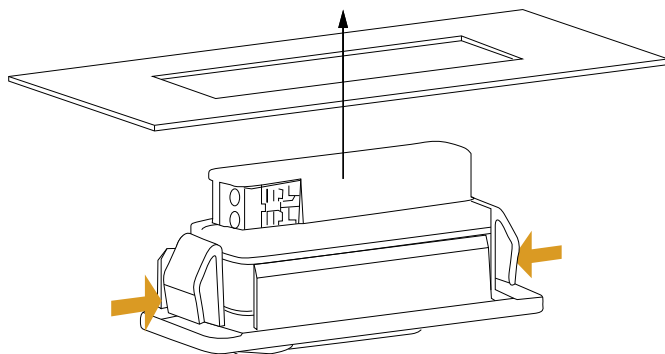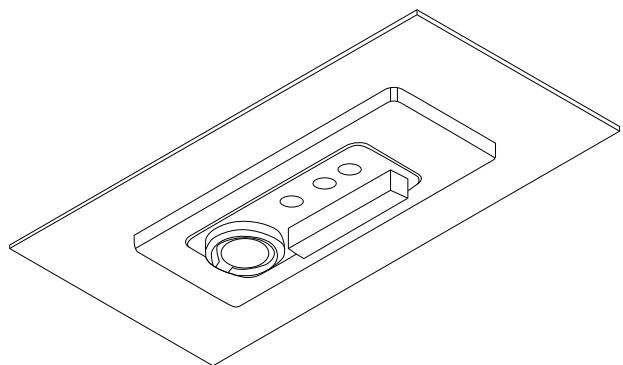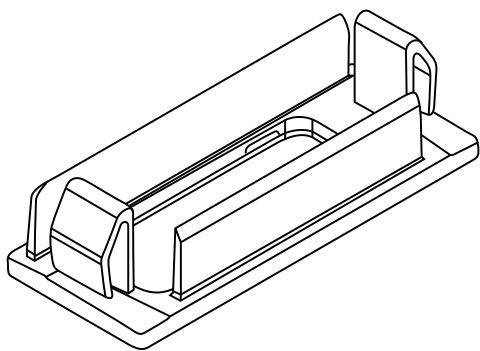
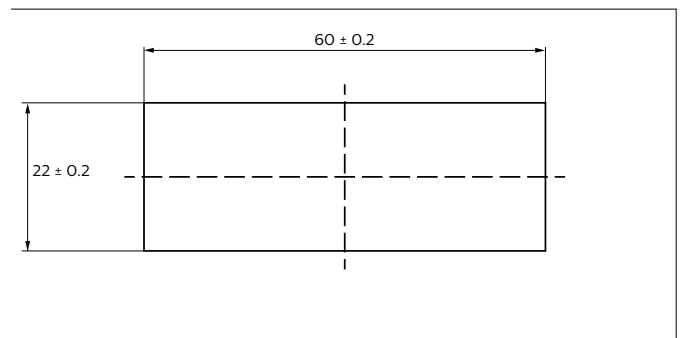
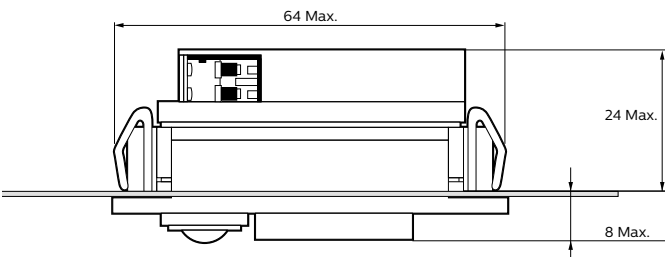
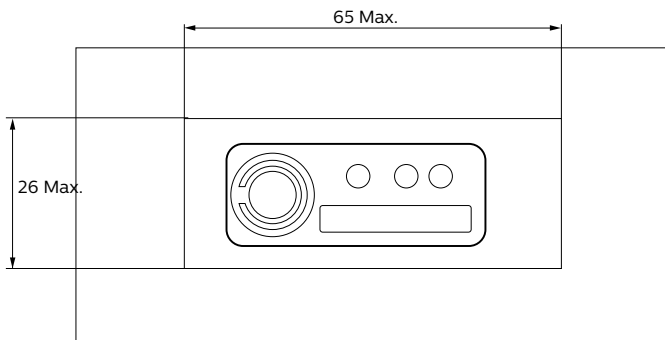


Press springs inwards on both sides before the bracket can slide-in the luminaire hole.

Installing EEasyAir SNS200 with ceiling mount bracket (SNS200CMP)


The ceiling mount SNS200CMP bracket is premounted with an EasyAir SNS200 along with the cable. For cut-out in the ceiling and mounting, refer the figures below. All dimensions are in mm.

Product	Colour	12NC
EasyAir SNS200CMP	White	9290 007 90206

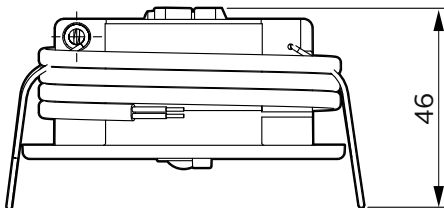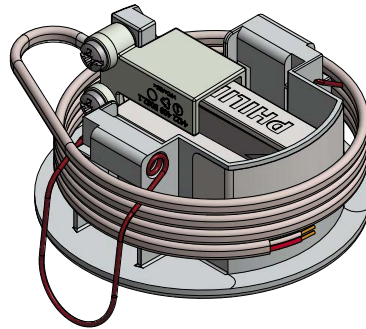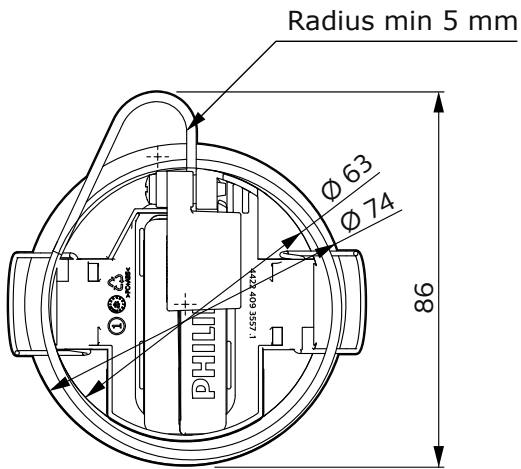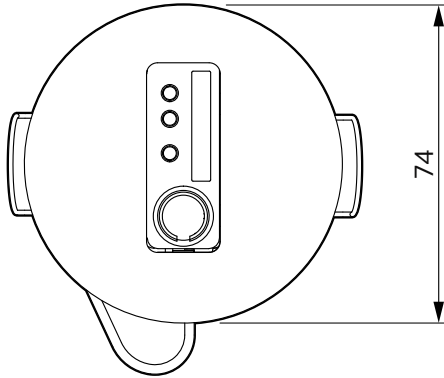

EasyAir SNS200

Wiring Diagram

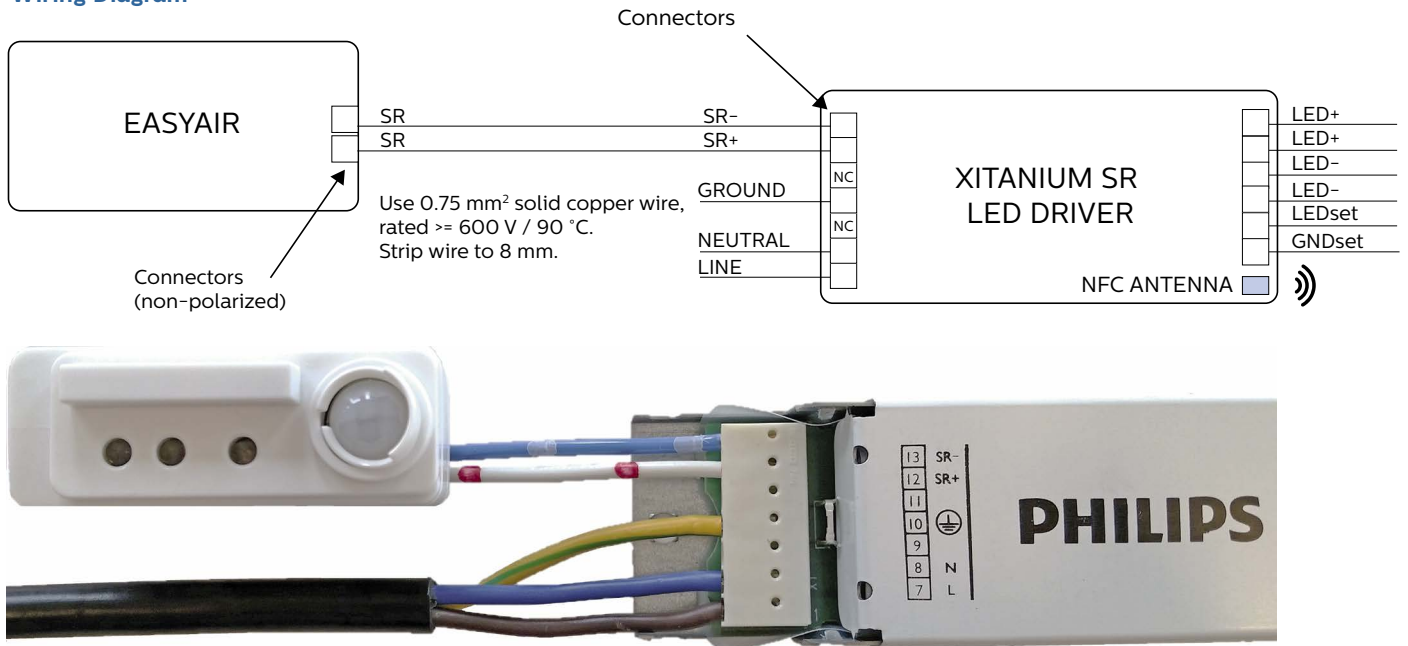


EasyAir SNS200

Occupancy Sensing

The detection area for the movement sensor can be roughly divided into two parts:

- Minor movement (person moving ≤ 0.9 m/s).
- Major movement (person moving ≥ 0.9 m/s)..


Height	Minor Movement		Major Movement	
	Y1	X1	Y2	X2
h				
2.4 m	2.9 m	2.7 m	4.5 m	2.9 m
3 m	3.6 m	3.4 m	5.4 m	3.6 m

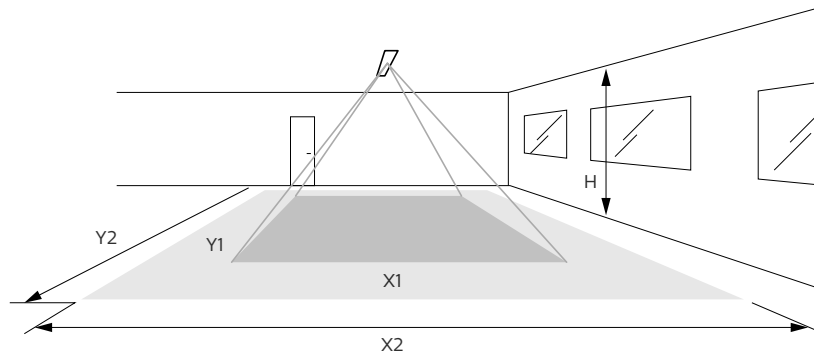

Note: Longer dimension of detection area (Y1, Y2) is parallel to longer dimension of EasyAir SNS200.

Full-On Sequence (Default)

Eco-On Level = Task Level

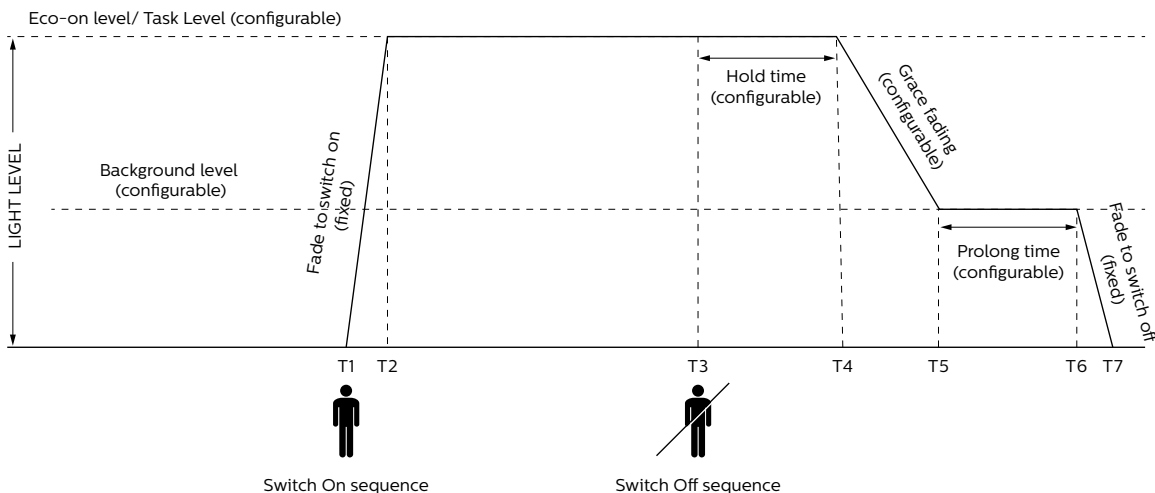

EasyAir SNS200


Daylight Sensor

The light sensor measures the total amount of light in a circular field of $\approx 80\%$ of the PIR detection area. The following aspects should be observed during installation:


- Minimum distance from the window ≥ 0.6 m.
- Prevent light reflections from outside entering the sensor (for example sunlight reflection on a car bonnet) as this will lead to incorrect light regulation.

As a guideline the formula $0.72 \times H$ can be used to calculate the minimum distance between the window and sensor whereby H is the height from the bottom of the window to the ceiling.

Photosensor Spatial Response


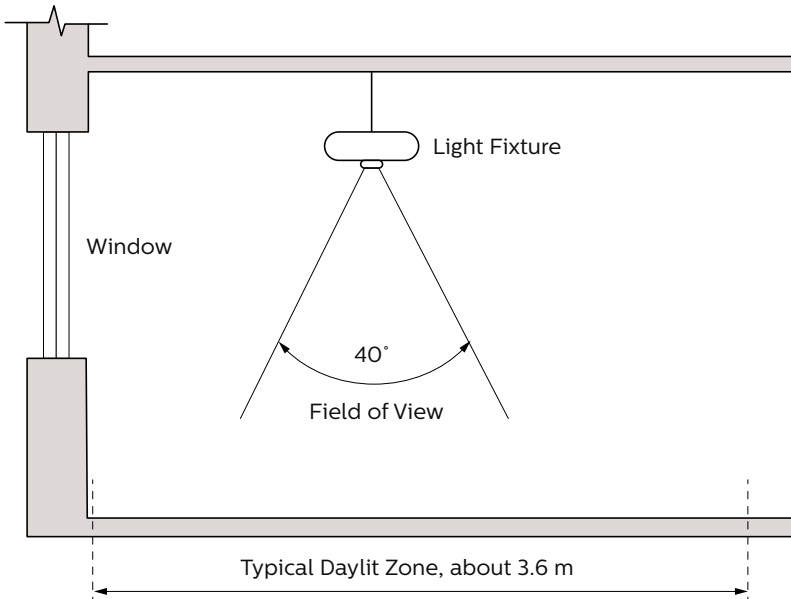


Photosensor Spectral Response

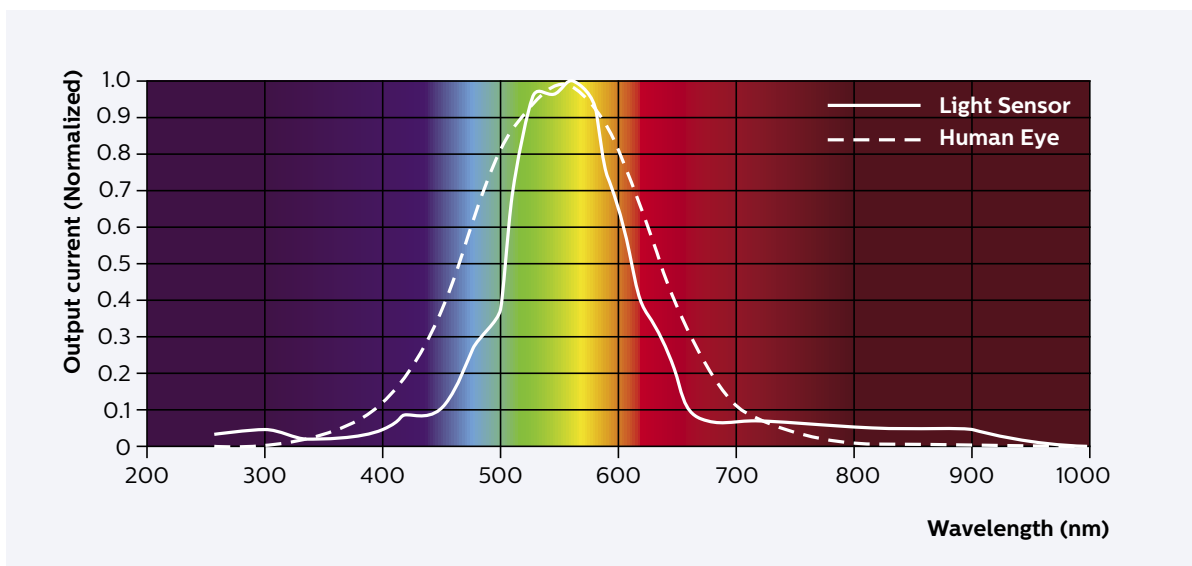

EasyAir SNS200

EasyAir SNS200 Configuration App

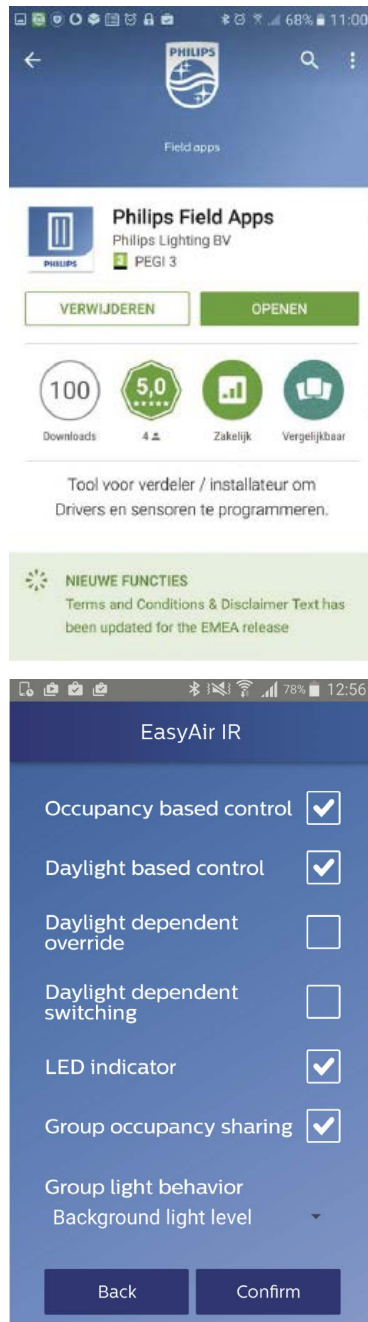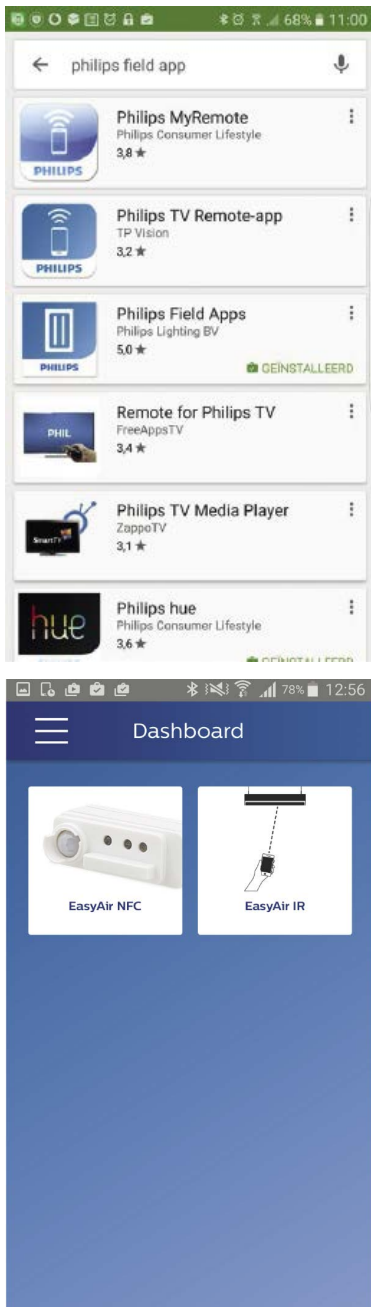

EasyAir SNS200 parameters can be configured via Philips Field Apps. Two versions are available:

1. EasyAir SNS200 NFC – This app allows configuring EasyAir SNS200 parameters only, when you can physically access the sensor with a smartphone.
2. EasyAir SNS200 IR – This app allows grouping of luminaires and adding switches along with easy configuration of EasyAir SNS200 parameters. This can be done via the IR feature of the app using applicable phones from floor level.

You must first register for the app to receive a username and password, then download Philips Field Apps from the Google Play Store. For more information, please visit our website:

<http://www.lighting.philips.co.uk/oem-emea/products/easy-to-integrate-wireless-sensors.html> for details including recommended Android phones and user manuals.

Default Factory Settings

Occupancy based control	Auto-on, Enabled
Daylight Based Control	Auto-on, Enabled
Daylight dependent switching	Default disabled
Daylight dependent override	Default disabled
LED Indicator	Enabled
Occupancy Mode	Auto-on/off
Group Occupancy Sharing	Enabled
Group Light Behaviour	Background level
Field Task Tuning	100%
Eco-On Level	100%
Background Light Level	20%
Hold Time	15 minutes
Prolong Time	15 minutes
Grace Fading	10 seconds
Fade to Switch On	0.7 seconds
Fade to Switch Off	0.7 seconds

Disclaimer

The information in this guide is accurate at the time of writing. This guide is provided “as is” without expressed or implied warranty of any kind. Neither Philips nor its agents assume any liability for inaccuracies in this guide or losses incurred by use or misuse of the information in this guide.

Philips will not be liable for any indirect, special, incidental or consequential damages (including damages for loss of business, loss of profits or the like), whether based on breach of contract, tort (including negligence), product liability or otherwise, even if Philips or its representatives have been advised of the possibility of such damages.



© 2018 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

www.lighting.philips.co.uk/oem-emea/products/connected-lighting

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

09/2018
Data subject to change