


EMERGENCY LED DRIVER EM-0825-010/105-P2

BATTERY CHART

Batter Order Code	Dimension (LxWxH)	Battery Type	Capacity	Wattage	Battery Voltage	Re-Charging Time
5W-L	9.37" x 1.10" x 1.12"	LiFePO4	1000mAH	5W	9.6V	24 Hrs
8W-L	9.37" x 1.10" x 1.12"		1500mAH	8W	9.6V	24 Hrs
16W-L	9.37" x 1.22" x 1.20"		3000mAH	16W	9.6V	32 Hrs
25W-L	9.37" x 2.24" x 1.20"		6000mAH	25W	9.6V	48 Hrs
5W-Q	3.62" x 2.70" x 0.98"		1000mAH	5W	9.6V	24 Hrs
8W-Q	3.62" x 2.70" x 0.98"		1500mAH	8W	9.6V	24 Hrs
16W-Q	4.61" x 2.83" x 1.20"		3000mAH	16W	9.6V	32 Hrs
25W-Q	4.61" x 2.83" x 2.38"		6000mAH	25W	9.6V	48 Hrs

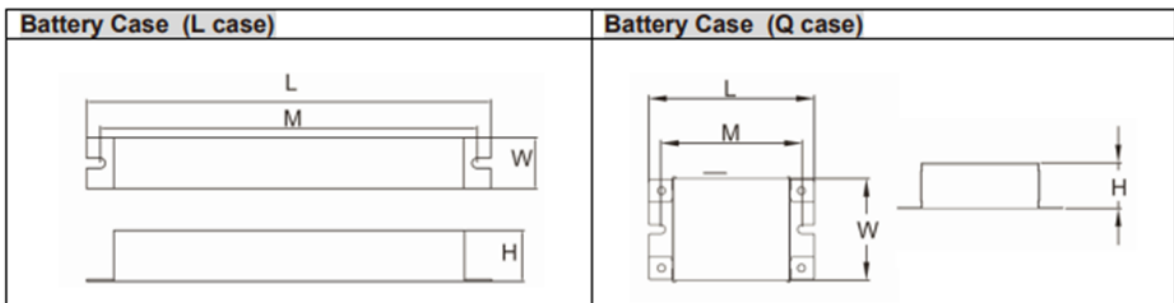

Wattage: Max load for 90 minutes

Program Switch	Features
<p>Diagram showing two potentiometers for programming. The left one is labeled X100 and the right one is labeled X10.</p>	<p>Programmable Constant Current</p> <ul style="list-style-type: none"> • Pre-set by factory • Adjust it by yourself <p>Adjustable Output Current</p> <ul style="list-style-type: none"> • 10 ranges • 50mA per scale