


HID POST TOP LINE

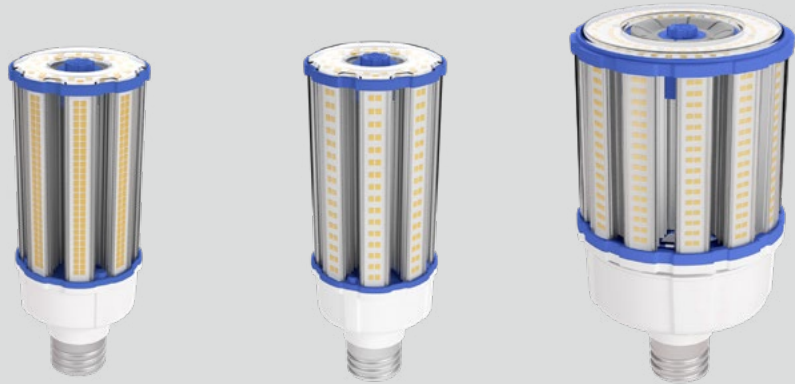

- 175W/250W/400W HID replacements
- Integrated rotary dimmer control
- Integral 6kV surge protector
- Thermal protection against overheating

Integral Rotary Dimming Control

Factory default setting: 100% lumen output

Rotate counterclockwise to reduce lumen output



Rotate clockwise to increase the lumen output

Integral dimming control allows light output to be tailored to application requirements and can be adjusted from 0-100% with no additional wiring or controls needed.

SPECIFICATIONS											
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
35887	54HID/840/277V/EX39/RC	4000K	7,700	82	143	175-250W	320°	50,000	120-277V	Yes	✓
35888	54HID/850/277V/EX39/RC	5000K	7,700	82	143	175-250W	320°	50,000	120-277V	Yes	✓
35889	63HID/840/277V/EX39/RC	4000K	9,500	82	150	175-250W	320°	50,000	120-277V	Yes	✓
35890	63HID/850/277V/EX39/RC	5000K	9,500	82	150	175-250W	320°	50,000	120-277V	Yes	✓
35891	100HID/840/277V/EX39/RC	4000K	14,500	82	145	250-400W	320°	50,000	120-277V	Yes	✓
35892	100HID/850/277V/EX39/RC	5000K	14,500	82	145	250-400W	320°	50,000	120-277V	Yes	✓
35050	EX39 EXTENDER	EX39 Lamp Extender Adds 1.70" (43mm) to Lamp Height									
97718	10SURGE/277V	10kV Surge Protector									

HID HIGH BAY / LOW BAY LINE



- Integral driver suitable for 120-277V
- Visible uplighting
- Compatible with EX39 & E39 sockets
- Exceptional efficacy >126 LPW



E26 Version Available

Intentional Uplighting

All High Bay and Low Bay products feature a ring of LEDs mounted around the base to provide visible uplighting for improved aesthetics and comfort



SPECIFICATIONS													
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC / T24	
35089	35HIDLB/840/BYP/E26/R	4000K	4,550	82	130	No	100-175W HID	110°	50,000	120-277V	No	N.A. / N.A.	
35090	35HIDLB/850/BYP/E26/R	5000K	4,650	82	133	No	100-175W HID	110°	50,000	120-277V	No	N.A. / N.A.	
35087	35HIDLB/840/BYP/EX39/R	4000K	4,550	82	130	No	100-175W HID	110°	50,000	120-277V	No	✓ / N.A.	
35088	35HIDLB/850/BYP/EX39/R	5000K	4,650	82	133	No	100-175W HID	110°	50,000	120-277V	No	✓ / N.A.	
35091	65HIDHB/840/BYP/EX39/R	4000K	8,970	82	138	No	175-250W HID	110°	50,000	120-277V	No	✓ / N.A.	
35092	65HIDHB/850/BYP/EX39/R	5000K	9,100	82	140	No	175-250W HID	110°	50,000	120-277V	No	✓ / N.A.	
35093	90HIDHB/840/BYP/EX39/R	4000K	12,420	82	138	No	250-400W HID	110°	50,000	120-277V	No	✓ / N.A.	
35094	90HIDHB/850/BYP/EX39/R	5000K	12,600	82	140	No	250-400W HID	110°	50,000	120-277V	No	✓ / N.A.	
35059	120HIDHB/840/BYP/EX39	4000K	17,760	82	148	No	250-400W HID	110°	50,000	120-277V	No	✓ / N.A.	
35060	120HIDHB/850/BYP/EX39	5000K	18,000	82	150	No	250-400W HID	110°	50,000	120-277V	No	✓ / N.A.	
34985	135HIDHB/840/BYP/EX39	4000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / N.A.	
34986	135HIDHB/850/BYP/EX39	5000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / N.A.	
35011	135HIDHBSSEN/840/BYP/EX39	4000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / N.A.	
35012	135HIDHBSSEN/850/BYP/EX39	5000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / N.A.	
35592	135HIDHBSSEN/840/BYP/EX39/T24	4000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / ✓	
35593	135HIDHBSSEN/850/BYP/EX39/T24	5000K	20,000	82	148	No	250-400W HID	120°	50,000	120-277V	No	✓ / ✓	