


LC-13-TP

Brand Name	COMP-COVERED
Ballast Type	Magnetic
Starting Method	Pre-Heat
Lamp Connection	Series
Input Voltage	120
Input Frequency	60 HZ
Status	Active

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F.
* CFQ13W/GX23	1	13	32/00	0.27	16	0.93	15	0.49	1.6	5.89
CFT13W/GX23	1	13	32/00	0.27	16	0.93	15	0.50	1.6	5.74

Wiring Diagram

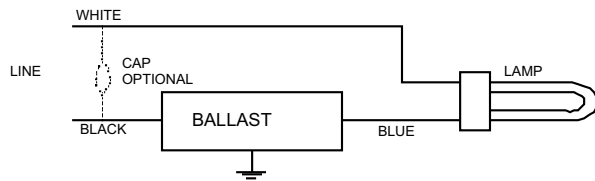


Diag. 140

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	17	43.2	Yellow/Blue		0
White		0	Blue/White		0
Blue	14	35.6	Brown		0
Red		0	Orange		0
Yellow		0	Orange/Black		0
Gray	0		Black/White		0
Violet		0	Red/White		0

Enclosure

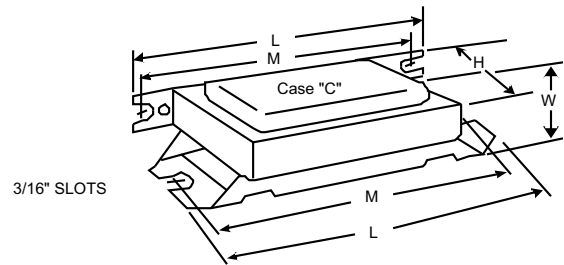

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
3.0625 "	1.375 "	1.8125 "	2.75 "
3 1/16	1 3/8	1 13/16	2 3/4
7.8 cm	3.5 cm	4.6 cm	7 cm