

T8

14.5T8/COR/48-850/MF21/G 10/1

Philips MainsFit (UL Type B) CorePro T8 LED tubes deliver high-quality, flicker free performance at an affordable price. The UL Type B LED tubes are designed with easy installation and long-term maintenance simplicity in mind. Upgrade your lighting to Philips and realize 50,000 hour LED lifetime backed by a 5-year, full replacement limited warranty. The DLC 5.1 listed products are compatible with Philips new PTB15D emergency driver meeting UL 924 requirements.

Product data

General Information		Lamp Current (Max)	
Base	G13 [Medium Bi-Pin Fluorescent]	Lamp Current (Min)	124 mA
EU RoHS compliant	Yes	Starting Time (Nom)	58 mA
Nominal Lifetime (Nom)	50000 h	Warm Up Time to 60% Light (Nom)	0.5 s
Switching Cycle	50000X	UL Type	Type B - bypass the ballast
Technical Type	14.5-32W	Power Factor (Nom)	0.9
Light Technical		Voltage (Nom)	120-277 V
Color Code	850 [CCT of 5000K]	Temperature	
Beam Angle (Nom)	240 °	T-Ambient (Max)	45 °C
Initial lumen (Nom)	2100 lm	T-Ambient (Min)	-20 °C
Color Designation	Daylight	T-Storage (Max)	65 °C
Correlated Color Temperature (Nom)	5000 K	T-Storage (Min)	-40 °C
Luminous Efficacy (rated) (Nom)	144.00 lm/W	T-Case Maximum (Nom)	70 °C
Color Consistency	<5	Controls and Dimming	
Color Rendering Index (Nom)	80	Dimmable	Limited
LLMF At End Of Nominal Lifetime (Nom)	70 %	Mechanical and Housing	
Operating and Electrical		Bulb Finish	Frosted
Input Frequency	50 to 60 Hz	Bulb Material	Glass
Power (Rated) (Nom)	14.5 W		

T8

Product Length	48 in
Bulb Shape	Tube, double-ended

Approval and Application


Energy Saving Product	Yes
Approbation Marks	RoHS compliance UL certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh

Product Data

Order product name	14.5T8/COR/48-850/MF21/G 10/1
--------------------	-------------------------------

EAN/UPC - Product	046677563554
Order code	563551
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002484704
Net Weight (Piece)	0.215 kg
Model Number	9290024847


Dimensional drawing

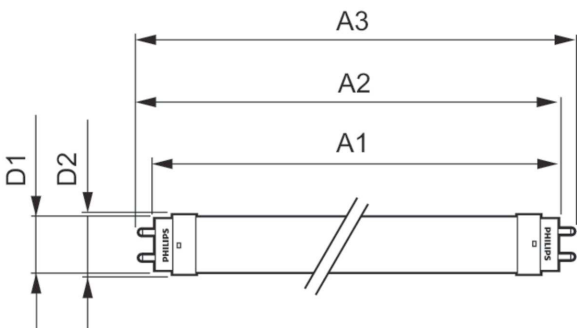


TLED T8 120-277V 14.5-32W 2100lm 5000K

Product	D1	D2	A1	A2	A3
14.5T8/COR/48-850/ MF21/G 10/1	25.7 mm	28 mm	1198.2 mm	1205.3 mm	1212.4 mm

Photometric data




LEDtube COR 14,5W G13 2100lm 850

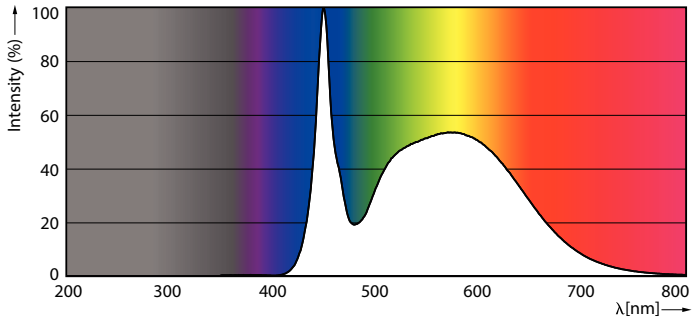


LEDtube COR 9,9W G13 1600lm 850

Photometric data




LEDtube COR 9,9W G13 1550lm


Lifetime

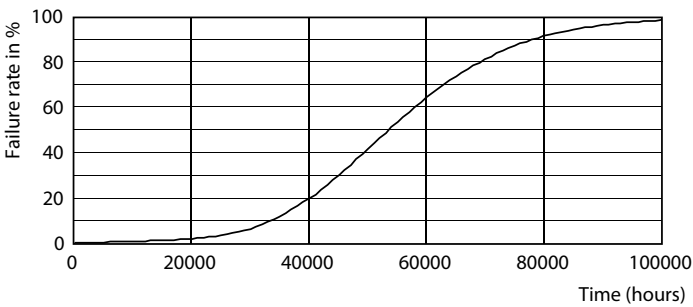


LEDtube 50K-LED

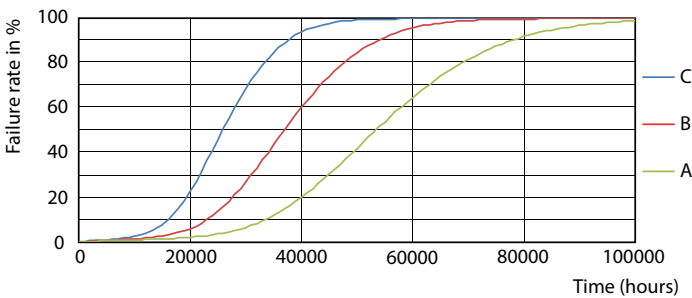

LEDtube 50K FailureRate-LED

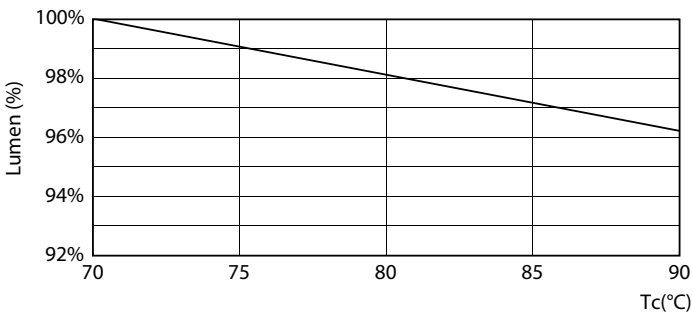


LEDtube COR 9,9W 50K LumenVsTc

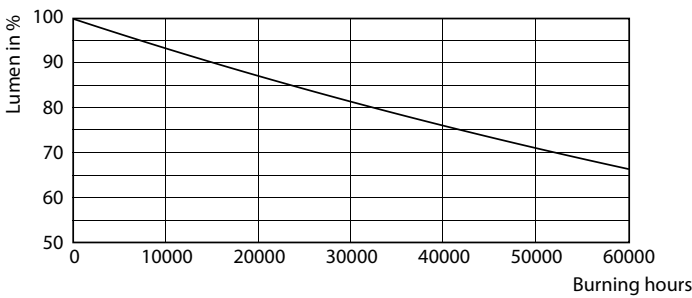

LEDtube 50K-LMP

Lifetime

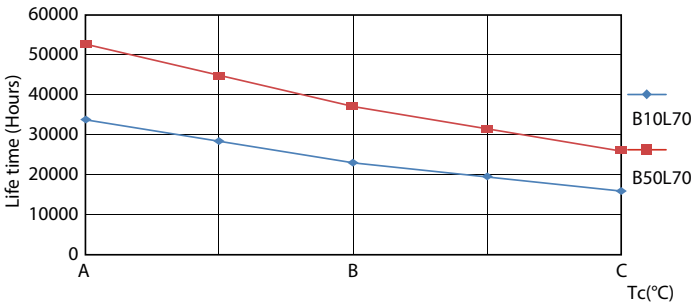

LEDtube 50K LifetimeVsTc-LED

