
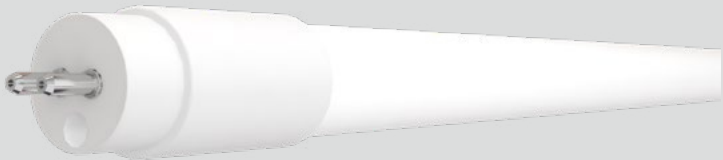


T8 DIR BAA LINE

T5 DIR LINE

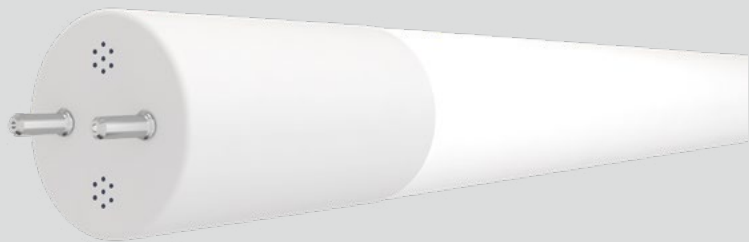

- Assembled in the USA - Satisfies BAA requirements
- Plug & Play installation working with Instant/Programmed Start ballast
- Compatible with select 0-10V dimmable ballasts and controls
- Meets NSF requirements (use of a shatter guard required)

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
36102	9.5T8/4F/830/DIR/US	3000K	1,650	82	143	Yes	32W	220°	60,000	120-277V	Yes	✓
36103	9.5T8/4F/835/DIR/US	3500K	1,650	82	143	Yes	32W	220°	60,000	120-277V	Yes	✓
36104	9.5T8/4F/840/DIR/US	4000K	1,650	82	143	Yes	32W	220°	60,000	120-277V	Yes	✓
36105	9.5T8/4F/850/DIR/US	5000K	1,650	82	143	Yes	32W	220°	60,000	120-277V	Yes	✓
36106	11T8/4F/830/DIR/US	3000K	1,800	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36107	11T8/4F/835/DIR/US	3500K	1,800	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36108	11T8/4F/840/DIR/US	4000K	1,800	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36109	11T8/4F/850/DIR/US	5000K	1,800	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36110	14T8/4F/830/DIR/US	3000K	2,200	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36111	14T8/4F/835/DIR/US	3500K	2,200	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36112	14T8/4F/840/DIR/US	4000K	2,200	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓
36113	14T8/4F/850/DIR/US	5000K	2,200	82	138	Yes	32W	220°	60,000	120-277V	Yes	✓

- Plug & Play installation
- Instant Start & Programmed Start ballast compatible
- Plastic construction meets NSF requirements
- Compatible with select 0-10V dimmable ballasts and controls

SPECIFICATIONS												
Product	Model	CCT	Lumens	CRI (typ.)	LPW	Dim	Equiv.	Beam Angle	Life (hrs)	Voltage	Encl.	DLC
57958	8T5HE/2F/830/DIR	3000K	950	82	119	Yes	14W	120°	60,000	120-277V	Yes	N.A.
57959	8T5HE/2F/835/DIR	3500K	950	82	119	Yes	14W	120°	60,000	120-277V	Yes	N.A.
57960	8T5HE/2F/840/DIR	4000K	1,100	82	138	Yes	14W	120°	60,000	120-277V	Yes	N.A.
35669	8T5HE/2F/850/DIR	5000K	1,100	82	138	Yes	14W	120°	60,000	120-277V	Yes	N.A.
57954	12T5HE/3F/830/DIR	3000K	1,420	82	118	Yes	21W	120°	60,000	120-277V	Yes	N.A.
57955	12T5HE/3F/835/DIR	3500K	1,420	82	118	Yes	21W	120°	60,000	120-277V	Yes	N.A.
57956	12T5HE/3F/840/DIR	4000K	1,550	82	125	Yes	21W	120°	60,000	120-277V	Yes	N.A.
97929	15T5HE/4F/830/DIR/R	3000K	2,200	82	147	Yes	28W	120°	60,000	120-277V	Yes	✓
97930	15T5HE/4F/835/DIR/R	3500K	2,200	82	147	Yes	28W	120°	60,000	120-277V	Yes	✓
97931	15T5HE/4F/840/DIR/R	4000K	2,250	82	150	Yes	28W	120°	60,000	120-277V	Yes	✓
97932	15T5HE/4F/850/DIR/R	5000K	2,250	82	150	Yes	28W	120°	60,000	120-277V	Yes	✓
98165	10.5T5HO/2F/830/DIR	3000K	1,500	82	143	Yes	24W	120°	60,000	120-277V	Yes	N.A.
98166	10.5T5HO/2F/835/DIR	3500K	1,500	82	143	Yes	24W	120°	60,000	120-277V	Yes	N.A.
98167	10.5T5HO/2F/840/DIR	4000K	1,600	82	152	Yes	24W	120°	60,000	120-277V	Yes	N.A.
35667	10.5T5HO/2F/850/DIR	5000K	1,600	82	152	Yes	24W	120°	60,000	120-277V	Yes	N.A.
98168	14.5T5HO/3F/830/DIR	3000K	2,050	82	142	Yes	39W	120°	60,000	120-277V	Yes	N.A.
98169	14.5T5HO/3F/835/DIR	3500K	2,050	82	142	Yes	39W	120°	60,000	120-277V	Yes	N.A.
98170	14.5T5HO/3F/840/DIR	4000K	2,200	82	152	Yes	39W	120°	60,000	120-277V	Yes	N.A.
97924	24T5HO/4F/830/DIR/R	3000K	3,450	82	144	Yes	54W	120°	60,000	120-277V	Yes	✓
97925	24T5HO/4F/835/DIR/R	3500K	3,450	82	144	Yes	54W	120°	60,000	120-277V	Yes	✓
97926	24T5HO/4F/840/DIR/R	4000K	3,500	82	146	Yes	54W	120°	60,000	120-277V	Yes	✓
97927	24T5HO/4F/850/DIR/R	5000K	3,500	82	146	Yes	54W	120°	60,000	120-277V	Yes	✓