



LED Highbay

165HB/LED/840/D NB DL BB G2 4/1

Philips LED high bay lamps are a direct replacement for 250W to 400W metal halide lamps which will deliver substantial energy savings. Philips LED HighBays delivers bright, clean light for a fraction of the energy used by conventional HID.

Product data


General Information	
Cap-Base	EX39 [Exclusionary Mogul Screw]
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	60 degree(s)
Luminous Flux	25,000 lumen
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	151.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	165 W
Lamp Current (Nom)	1,650 mA
Wattage Equivalent	400 W
Starting Time (Nom)	0.5 s

Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V
Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	136 °F
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Plastic
Bulb Shape	Others
Approval and Application	
EU RoHS compliant	Yes
Product Data	
Order product name	165HB/LED/840/D NB DL BB G2 4/1
Order code	563972
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

LED Highbay



Material number (12NC)	929002496404
Full product name	165HB/LED/840/D NB DL BB G2 4/1
EAN/UPC - Case	50046677563979

Dimensional drawing




Product	D	C
165HB/LED/840/D NB DL BB G2 4/1	250 mm	285 mm

Photometric data



Light Distribution Diagram - 165HB/LED/840/D NB DL BB G2 4/1

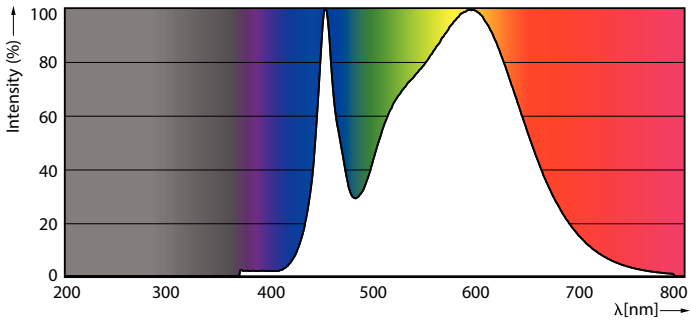


Spectral Power Distribution Colour - 165HB/LED/840/D NB DL BB G2 4/1

LED Highbay

Lifetime



Life Expectancy Diagram - 165HB/LED/840/D NB DL BB G2 4/1

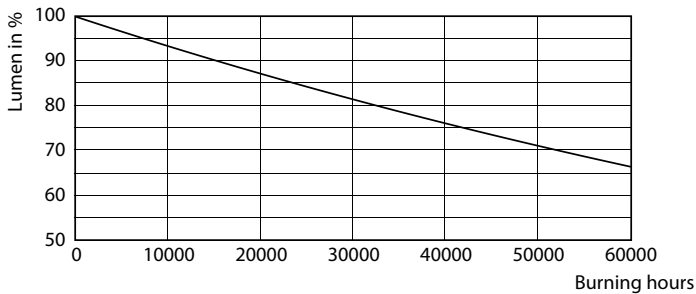

Lumen Maintenance Diagram - 165HB/LED/840/D NB DL BB G2 4/1

