



LED Designer Deco

1S14/VIN/827/CL/G/E26/ND 1CT

Philips LED Designer Deco lamps allow you to maintain a warm, classic light or a modern, chic effect while providing longer life and energy savings

Product data


General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	827 [CCT of 2700K]
Luminous Flux	60 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	60.00 lm/W
Color Consistency	<4
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	1 W
Lamp Current (Nom)	12 mA
Wattage Equivalent	10 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s

Power Factor (Fraction)	0.5
Voltage (Nom)	110-130 V
Temperature	
T-Case Maximum (Nom)	79 °F
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	S-14
UL Wet/ damp/ dry location	Wet location
Approval and Application	
Energy Certifications	No
T20 compliant	Yes
Application Conditions	
can it be used in closed luminaires	Yes
Product Data	
Order product name	1S14/VIN/827/CL/G/E26/ND 1CT
Full product name	1S14/VIN/827/CL/G/E26/ND 1CT

Order code	575209
Material Nr. (12NC)	929003082704
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677575205


Numerator - Packs per outer box	10
EAN/UPC - Case	50046677575200

Dimensional drawing




Product	D	C
1S14/VIN/827/CL/G/E26/ND 1CT	1-13/16 inch	3-7/16 inch


Photometric data

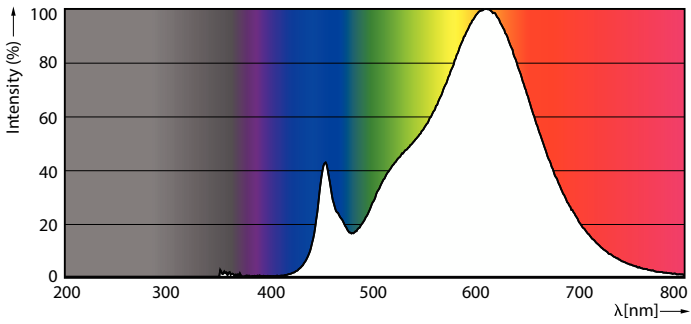

Spectral Power Distribution Colour - 1S14/VIN/827/CL/G/E26/ND 1CT



Light Distribution Diagram - 1S14/VIN/827/CL/G/E26/ND 1CT



General Uniform Lighting

General uniform lighting - 1S14/VIN/827/CL/G/E26/ND 1CT

Lifetime



Life Expectancy Diagram - 1S14/VIN/827/CL/G/E26/ND 1CT



Lumen Maintenance Diagram - 1S14/VIN/827/CL/G/E26/ND 1CT

