

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com


Customer Name:
Project Name:
Fixture Type:



GE
Lighting

72548 - 200PS30RS/23/STG

GE Protected Rough Service Worklight Saf-T-Gard® PS30 - Rough Service;
Shatter-Resistant

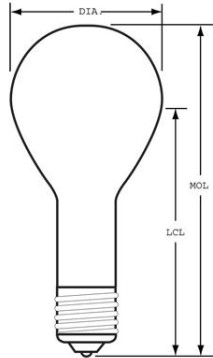

GENERAL CHARACTERISTICS

Lamp Type	Incandescent - A-line
Bulb	PS30
Base	Medium Screw
Filament	C-9
Bulb Finish	Inside frost
Wattage	200/177
Voltage	130/120
Rated Life	1000 hrs
Primary Application	Rough Service; Shatter-Resistant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	3240 /2495
Nominal Initial Lumens per Watt	16 /14

DIMENSIONS

Maximum Overall Length (MOL)	8.0600 in(204.7 mm)
Light Center Length (LCL)	6.000 in(152.4 mm)

PRODUCT INFORMATION

Product Code	72548
Description	200PS30RS/23/STG
Standard Package	Case
Standard Package GTIN	10043168725481
Standard Package Quantity	60
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	60
UPC	043168725484