

Starter Base w/ leads



660W-250V **13285**

Low Pressure Sodium



1000 Volts
660 Watts

12040

Body - high temperature, flame retardant thermoset.

Contacts - electro tinned copper alloy.

Leads - 16 AWG stranded, 1000V, 9"

Pig Tail Type

rubber medium base,



660W-250V

23680

T8 & T12 "U-Back" Sockets & Caps




Caps
14402 -T8
15025 -T12

12871
MOL
1-7/8"

13020
MOL
1-1/2"

600V- 660W

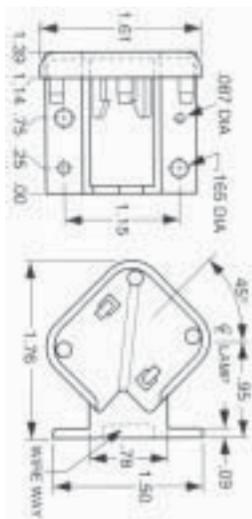


Angle base for 4 pin multi socket



23724

Socket can be used alone or with the angle base.

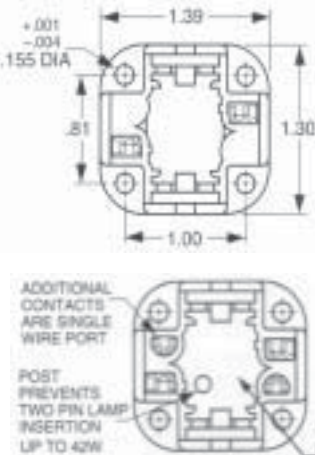

4-pin 10 & 13W

29100 -G24q-1, Gx24q-1

4-Pin Multi Socket



4-pin 26, 32, 42W

26138 -G24q, Gx24q-3, 4



13010

G23,G23-2

snap-in

Twin tube 5,7,9,11W

10381

GX23

13W

twin tube

snap-in



12861

G23



Twin tube 5,7,9,11W