



PAR30/PAR20 LED

25.5PAR30L/PER/830/S15/ND/120-277V 6/1FB

Philips PAR30 and PAR20 LED Single Optic Lamps provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

General Information	
Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	25.5-75W

Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	15 °
Initial lumen (Nom)	2500 lm
Luminous Flux (Rated) (Nom)	2500 lm
Luminous Intensity (Nom)	16000 cd
Color Designation	White (WH)
Rated Beam Angle	15 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	98.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	25.5 W
Lamp Current (Max)	230 mA
Lamp Current (Min)	115 mA

Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.8
Voltage (Nom)	120-277 V

Temperature	
T-Case Maximum (Nom)	95 °C

Controls and Dimming	
Dimmable	No


Approval and Application	
Suitable For Accent Lighting	Yes

Product Data	
Order product name	25.5PAR30L/PER/830/S15/ND/120-277V 6/1FB
EAN/UPC - Product	046677534646
Order code	534644
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001917004
Net Weight (Piece)	0.290 kg

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.
- CAUTION: Risk of electric shock— do not use where directly exposed to water
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs,change the location of the products involved. This RFLD device complies with Canadian ICES-005.


Dimensional drawing




PAR30L 27.5-W 2300lm 15D 3000K E26 ND

Product	D	C
25.5PAR30L/PER/830/S15/ND/120-277V 6/1FB	96 mm	119 mm

Photometric data

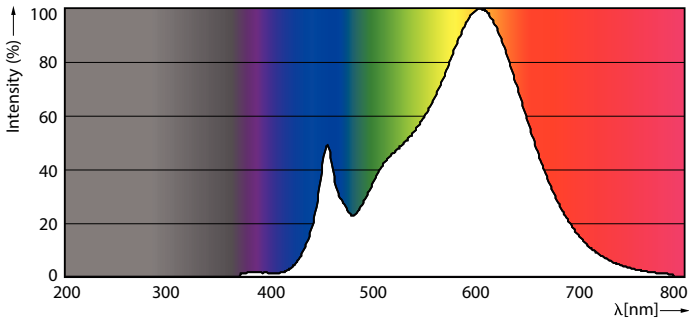


LEDspot PAR30 1FB



LEDspot 25,5 PAR30L 830 S15


PAR30/PAR20 LED

Photometric data




LEDspot 25,5 PAR30L 830 S15

Lifetime

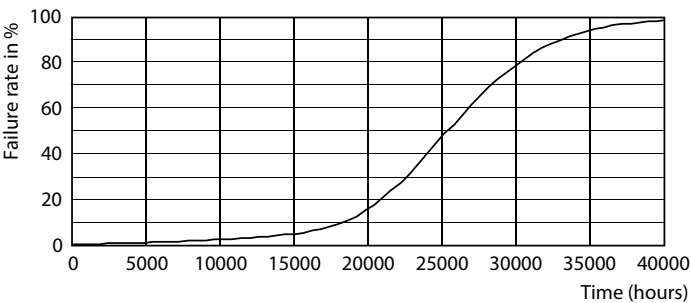

LEDspot PAR30 1FB

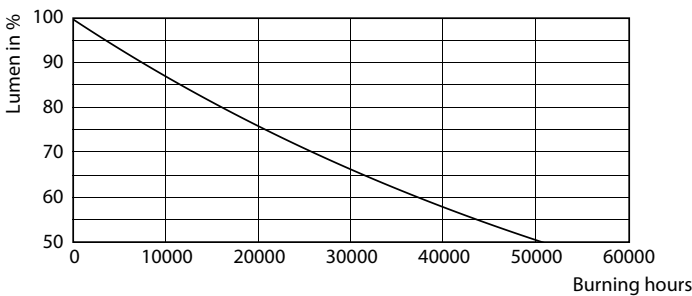

LEDspot PAR30 1FB

