

**Presented By:** Candela Corporation  
**Contact Phone:** (800) 922-9226  
**Contact E-mail:** sales@candelacorp.com

**Customer Name:**  
**Project Name:**  
**Fixture Type:**





GE  
Lighting

## 19876 - 35PAR36/H/SP8

GE PAR36 - Narrow Spot

- Standard Halogen - Crisp, white light

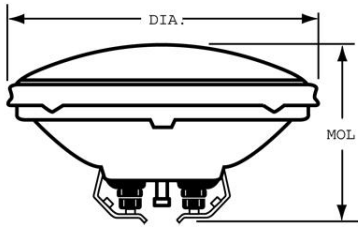

### CAUTIONS & WARNINGS

#### Caution

- Lamp may shatter and cause injury if broken
  - Do not use lamp if outer glass is scratched or broken.

#### Warning

- Risk of Burn
  - Allow lamp/fixture to cool before handling.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in fixture rated for this product.
- A damaged lamp emits UV radiation which may cause eye/skin injury
  - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Do not exceed 110% of rated voltage.
  - Do not use lamp if outer glass is scratched or broken.

### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Wattage	35
Voltage	12/35
Rated Life	4000 hrs
Primary Application	Narrow Spot

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	7.142857 /250 /250
Beam Spread - Horizontal	11.0 - 10.0 °
Beam Spread - Vertical	9.0 - 10.0 °
Center Beam Candlepower (CBCP)	8000
Color Temperature	3050 K
Max. Beam Candlepower (MBCP)	8000
Nominal Initial Lumens per Watt	7

### DIMENSIONS

Maximum Overall Length (MOL)	2.7500 in(69.8 mm)
Bulb Diameter (DIA)	4.500 in(114.3 mm)
Bulb Diameter (DIA) (MAX)	4.500 in(114.3 mm)

### PRODUCT INFORMATION

Product Code	19876
Description	35PAR36/H/SP8
Standard Package	Case
Standard Package GTIN	00043168198769
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168970280