

Airfield Lamps

6.6A Current Controlled, Tungsten Halogen



Airfield lighting systems provide essential visual guidance for aircraft taxi, take-off, approach and landing. OSRAM 6.6A tungsten halogen lamps for the airfield lighting industry combine high performance with long life to keep airfield maintenance costs down, while upholding high standards of safety and reliability. OSRAM uses state-of-the-art equipment and processes to yield high quality lamps with precision filament alignment for the best optical performance within the fixture. Airfield fixture manufacturers around the world choose OSRAM lamps due to their consistent and reliable performance.

Key Features & Benefits

- Low maintenance costs due to long lamp life
- Reliable and consistent light output enhances visibility over the life of the lamp
- FAA approved in conjunction with many OEM fixtures
- Durable construction provides resistance to the effects of vibration
- Broad product portfolio for runway, taxiway and approach lighting
- IR radiation provides guidance in low visibility conditions
- Ability to reduce light output when needed
- Flicker-free operation
- Mercury-free

Product Offering

Type	Watts	Bulb Type	Connector/Base
Reflector Lamps	30, 40, 45, 48, 62, 105	MR11, MR16, MR16 w/ IRC	Female Flat, Female Round, Male Flat
Pk30d Base Lamps	45, 65, 100, 150, 200	T4, T4 w/ IRC	Female Flat, Male Flat
Single-End Lamps	30, 45, 150, 200	T3.5, T4	G6.35, GY9.5, GZ9.5
Double-End Lamps	200	T5	R7s

Application Information

Applications

- Runway
- Taxiway

Typical Fixtures

- Elevated runway and taxiway lights
- Inset runway and taxiway lights
- Approach lights
- Guidance signs


Application Notes

1. Lamps to be operated on 6.6A circuits
2. Many OEM fixtures are FAA approved with OSRAM lamps
3. Lamps available with connector combinations A, B, Z/C on request
4. Pk30d base is pre-focused
5. Note burning position for each lamp



Ordering Information and Dimensions


Reflector Lamps for Series Operation at 6.6A (Operating Position: any)

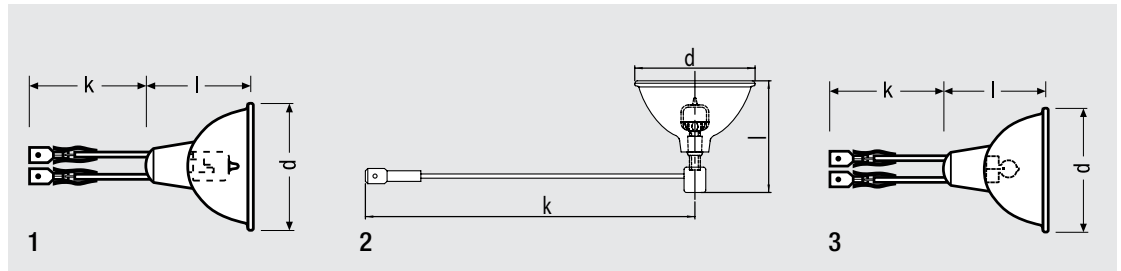

Item Number	Ordering Abbreviation	Wattage (W)	Average Life (h)	Axial Luminous Intensity Min. (kcd)	(d) Diameter (mm)	(l) Length (mm)	(k) Min. Cable Length (mm)	Connector	Figure	Standard Case Qty
58938	6.6A/30MR16/64331AC/FL	30	1000	4.3	50.4	48	125	female, male	1	20
58964	6.6A/30MR16/64331A/FL	30	1000	4.3	50.4	48	125	female	1	20
58506	6.6A/30MR16/64331A/SP	30	1000	18	50.4	48	125	female	1	20
58899	6.6A/40MR11/64333A	40	1500	12.7	35.3	37	125	female	1	20
58889	6.6A/40MR11/64333B	40	1500	12.7	35.3	37	125	female round	1	20
*	6.6A/40MR11/64333C 40-15	40	1500	12.7	35.3	37	125	male	1	20
58907	6.6A/45MR16/64337A 45-15	45	1500	21	50.4	45	125	female	1	20
58908	6.6A/45MR16/64337B 45-15	45	1500	21	50.4	45	125	female round	1	20
58891	6.6A/48MR16/64337A 48-15	48	1500	23	50.4	45	125	female	1	20
*	6.6A/48MR16/64337B 48-15	48	1500	23	50.4	45	125	female round	1	20
*	6.6A/48MR16/64337C 48-15	48	1500	23	50.4	45	125	male	1	20
59070	6.6A 64337 IRC-A 48-30	48	3000	23	50.4	45	125	female	3	20
59071	6.6A 64337 IRC-C 48-30	48	3000	23	50.4	45	125	male	3	20
58894	6.6A/48MR16/64338AC	48	1000	27	50.4	45	125	female, male	1	20
58493	6.6A/62MR16/64336A	62	1500	31.5	50.4	45	125	female	1	20
58953	6.6A/105MR16/64339A	105	1000	32	50.4	48	125	female	2	20
58960	6.6A/105MR16/64339AC	105	1000	32	50.4	48	125	female, male	2	20
58961	6.6A/105MR16/64339B	105	1000	32	50.4	48	125	female round	2	20
58963	6.6A/105MR16/64339C	105	1000	32	50.4	48	125	male	2	20

* Available upon special request.


PK30d Base Lamps for Series Operation at 6.6A (Operating Position: s90 / vertical-to-horizontal, base down)

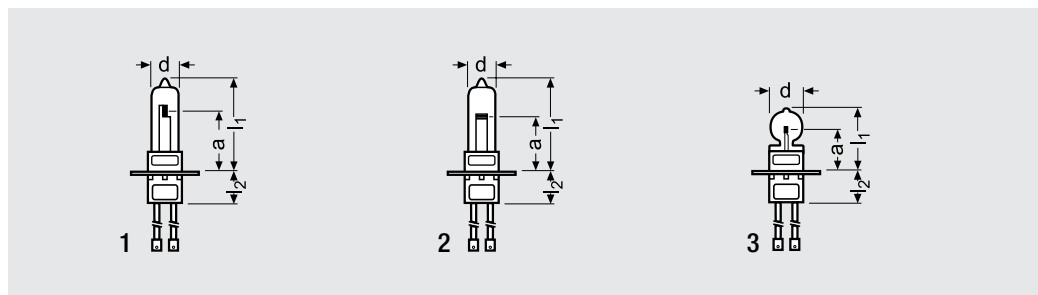

Item								Filament	(a)	(d)	(l1)	(l2)		
Number	Ordering	Abbreviation	LFI	Wattage	Average	Luminous			Dimension	Distance	Diameter	Length	Length	Standard
				(W)	Life (h)	Flux (lm)	Connector	Filament	w x h (mm)	(mm)	(mm)	(mm)	(mm)	Figure Case Qty
58910	6.6A	64317C 45-15 PK30D	J1/76	45	1500	800	male	C-8	1.4x3.4	16	13.5	36	20	1 100
58947	6.6A	64317 IRC-C 45-30 PK30D	J1/76	45	3000	800	male	C-8	2.1x2.9	16	15	28	20	3 100
58988	6.6A	64318A 45-15 PK30D	J1/77	45	1500	800	female	C-8	1.4x3.4	16	13.5	30	20	1 100
58989	6.6A	64318Z/C 45-15 PK30D	J1/77	45	1500	800	male	C-8	1.4x3.4	16	13.5	30	20	1 100
59010	6.6A	64319A 45-15 PK30D		45	1500	800	female	C-8	1.4x3.4	20	13.5	34	16	1 100
59011	6.6A	64319Z/C 45-15 PK30D		45	1500	800	male	C-8	1.4x3.4	20	13.5	34	16	1 100
59004	6.6A	64319 IRC-A 45-30 PK30D		45	3000	800	female	C-8	2.1x2.9	20	15	32	16	3 100
*	6.6A	64328 HLX-A 65-15 PK30D		65	1500	1450	female	Cbar-6	3.2x3.2	20	13.5	32	16	2 100
59069	6.6A	64328 HLX-Z/C 65-15 PK30D		65	1500	1450	male	Cbar-6	3.2x3.2	20	13.5	32	16	2 100
59072	6.6A	64341 HLX-A 100-15 PK30D	J1/79	100	1500	2700	female	Cbar-6	5.3x3.0	20	13.5	32	16	2 100
59073	6.6A	64341 HLX-Z/C 100-15 PK30D	J1/79	100	1500	2700	male	Cbar-6	5.3x3.0	20	13.5	32	16	2 100
59074	6.6A	64342 HLX-C 100-15 PK30D	J1/80	100	1500	2700	male	Cbar-6	5.3x3.0	20	13.5	40	16	2 100
59077	6.6A	64361 HLX-A 150-15 PK30D	J1/83	150	1500	3600	female	Cbar-6	7.1x3.6	20	13.5	34	16	2 100
59079	6.6A	64361 HLX-Z/C 150-15 PK30D	J1/83	150	1500	3600	male	Cbar-6	7.1x3.6	20	13.5	34	16	2 100
59080	6.6A	64382 HLX-A 200-15 PK30D	J1/84	200	1500	4800	female	CC-6	6.2x3.9	20	13.5	36	21	2 100
59081	6.6A	64382 HLX-C 200-15 PK30D	J1/84	200	1500	4800	male	CC-6	6.2x3.9	20	13.5	36	21	2 100

* Available upon special request.


Single-ended Lamps for Series Operation at 6.6A

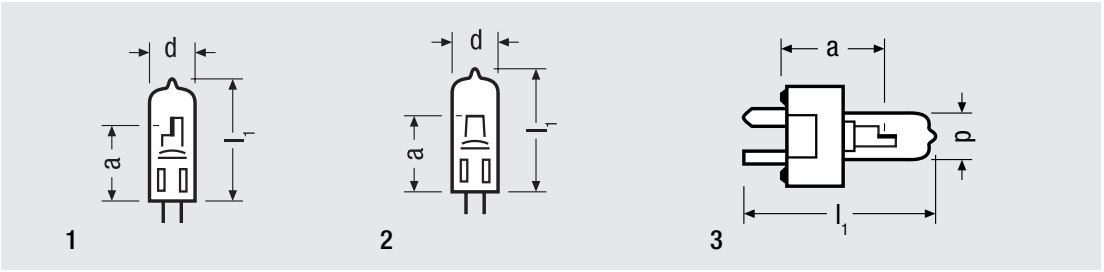

Item Number	Ordering Abbreviation	LFI/ ANSI	Wattage (W)	Average Life (h)	Luminous Flux (lm)	Base	Burning Position	Filament Type	Filament Dimension w x h (mm)	(d) Diameter (mm)	(a) Distance (mm)	(l1) Length (mm)	Figure	Standard Case Qty
58850	6.6A/30T3.5/64322/EXL/DL	EXL	30	1500	430	GZ 9.5	s90	C-8	1.2x3.5	11.5	25.4	44.5	3	12
59928	6.6A/45T3.5Q/64321	J1/57	45	1500	900	G6.35	s90	C-8	1.3x3.6	11.5	33	47	1	40
58846	6.6A/45T3.5/64320/EXM	EXM	45	1500	900	GZ9.5	s90	C-8	1.4X3.3	11.5	25.4	44.5	3	12
*	6.6A/100T4Q/64346	J1/58	100	1200	2300	G6.35	s90	Cbar-6	3.0x4.7	13.5	33	47	2	40
58855	6.6A/150T4Q/64354/EWR/DL	EWR	150	1500	3700	GZ(GY)9.5	s90	Cbar-6	4.4x5.5	13.5	39.1	65	3	12
59078	6.6A/200T4Q/64386	J1/39	200	1500	4700	G6.35	s90	Cbar-6	4.6x6.8	13.5	33	47	2	40
58851	6.6A/200T4Q/2PPF/58750/EZL/DL	EZL	200	1300	5200	GY(GZ)9.5	any	CC-6	5.5x3.8	13	39.1	65	3	12

* Available upon special request.

Double-ended Lamps for Series Operation at 6.6A

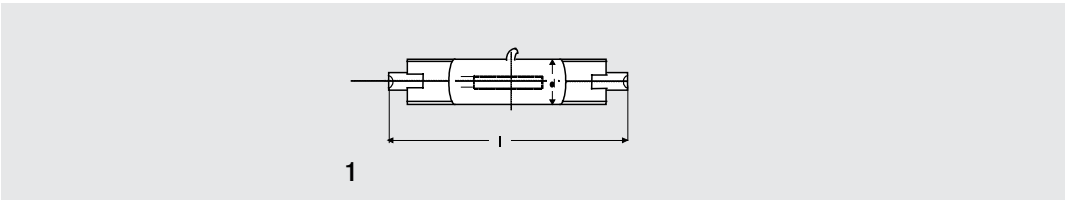

Item Number	Ordering Abbreviation	LFI	Wattage (W)	Average Life (h)	Luminous Flux (lm)	Base	Burning Position	Filament Type	Filament Dimension w x h (mm)	(d) Diameter (mm)	(l1) Length (mm)	Figure	Standard Case Qty
58707	6.6A/200T5/CL/64380	J1/40	200	1000	4400	R7s	any	CC-8	10.0x3.0	15	65.6	1	25


Ordering Guide

Reflector and Single End Lamps


6.6A	/	48	MR16	64337	A	48-15	/
Amperage		Wattage	Bulb Shape	Lamp Description	Connector	Wattage-Life	Beam or ANSI
			MR – Reflector		A = female flat	10 = 1000hrs	FL – Flood
			T – Tubular		B = female round	15 = 1500hrs	SP – Spot
					Z/C = male flat	30 = 3000hrs	
					AC = female, male flat		

Pk30d Base Lamps


6.6A	64342	HLX	C	100-15	PK30d
Amperage	Lamp Description	Special Coating	Connector	Wattage-Life	Base
		HLX	A = female flat	15 = 1500hrs	
		IRC	B = female round	30 = 3000hrs	
			Z/C = male flat		
			AC = female, male flat		



A – Female Flat



B – Female Round



Z/C – Male Flat

OSRAM

Americas Headquarters

OSRAM SYLVANIA Inc.

100 Endicott Street

Danvers, MA 01923 USA

Phone 1-800-LIGHTBULB (1-800-544-4828)

www.osram-americas.com

OSRAM is a registered trademark of OSRAM GmbH.
Specifications subject to change without notice.

© 2014 OSRAM

OSRAM

Display/Optic Specialty Lighting

OSRAM SYLVANIA Inc.

129 Portsmouth Avenue

Exeter, NH 03833

United States: 888-677-2627

Canada: 800-265-2852

Mexico: 525-899-1807

