

## ABV4 Series

### LED High Bay Lighting

The **Albeo® ABV4** LED luminaire is an exceptional mixture of value and performance. Ideal for high bay and low bay applications in industrial and commercial buildings. Designed to replace 150W–1500W HID and four-to-eight lamp T5/T8 fixtures with unmatched reliability and quality. Now with integral Daintree® sensors and controls. See optic **N1** for aisle distribution!



### CONSTRUCTION

<b>Housing:</b>	Combination steel and aluminum
<b>Lens:</b>	Polycarbonate, Acrylic
<b>Paint:</b>	Powder coat painted housing No glass in housing or lenses
<b>Weight:</b>	10–11 lbs (4.55–4.99 kg) per module (see dimensional drawings)
<b>Optical Assembly:</b>	Polycarbonate reflective optics with optional lens

### OPTICAL SYSTEM

<b>Distribution:</b>	Wide, Wide Diffused (reduce Glare), Medium and Narrow
<b>Lumens:</b>	9,000–90,000
<b>Efficacy:</b>	167 - 197 LPW typical
<b>CCT:</b>	3000K, 3500K, 4000K, 5000K
<b>CRI:</b>	70, 80, & 90

### ELECTRICAL

<b>Input Voltage:</b>	120V–277V, 347V, & 480V
<b>Input Frequency:</b>	50/60Hz
<b>LED Driver Type:</b>	Designed to exceed 100,000 hrs of operation at worst possible rated conditions
<b>Power Factor (PF)*:</b>	>0.9*
<b>Total Harmonic Distortion (THD)*:</b>	<20%*
<b>Surge Protection:</b>	Tested per ANSI C136.2-2015 <ul style="list-style-type: none"> <li>• 6kV surge protection, standard for Lumen Output '24' and higher</li> <li>• 3kV surge protection, Lumen Output '18' and lower</li> </ul>
<b>EMI:</b>	FCC CFR Title 47 Part 15, Class A

\* PF and THD may vary with options

### CONTROLS

<b>Dimming:</b>	Standard 0–10VDC, 10%
<b>Controls:</b>	High-end trim, occupancy and ambient light detection with dimming available. Wireless Daintree® options available.

### LUMEN AMBIENT TEMPERATURE

TYPE	TEMPERATURE RATE
<b>OPERATING TEMPERATURE</b>	–30°C to +55°C (–22°F to 131°F)
<b>STORAGE TEMPERATURE</b>	–40°C to +70°C (–40°F to 158°F)

### LUMEN MAINTENANCE

ESTIMATED LXX(10K) @ HRS 250,000 HR AT 25°C	REPORTED LXX(10K) @ HRS 65,000 HR AT 25°C	LXX(10K) @ HOURS 100,000 HR AT 55°C
L70	L90	L70

### MOUNTING & ACCESSORIES

- **Typical Mounting:**
  - Standard Chain/Cable mount ready
  - Threaded rod kit & Surface mount optional
  - Pendant mount kit optional
- **Standard:** Knockout access (no cord, no plug)
- **Cord & Plugs:**
  - 6 ft, 12 ft, 15 ft, 20 ft cord options
  - 5A, 20A, Straight or twist lock plug
  - Reloc OCS Cord-Plug FS or GS
  - Plug-N-Go Cord-Plug MF or HF
- **Wire Guard Option Available**
- **Integral and Accessory EMBB Options Available**

### DESIGN LIFE & WARRANTY

- **Reliability Testing:** Fixture components designed to exceed 100,000 hrs of operation at the worst possible rated conditions. Please refer to the DLC QPL website for the latest and most complete information: <http://www.designlights.org/QPL>
- **Certification:** UL/cUL Listed, RoHS
- **Packaging:** Standard job pack contain 7–21 fixtures. Orders of <14 are typically single pack. 90T & 90H are bulk pack only.
- **Current's Limited 5-year Warranty:** See website
- **Rated:** IP20, Damp
- Certain airborne contaminants can reduce integrity of acrylic material and LEDs and may negatively affect the functioning of the LEDs and other electronic components, depending on factors such as concentration levels, ventilation and temperature. (Contact manufacturer for list of substances)



## ABV4 Series

LED High Bay Lighting

### Ordering Information

#### CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## ABV4

PRODUCT ID	VOLTAGE	LUMEN OUTPUT	CCT/CRI	OPTICS/LENS	CONTROLS	MOUNTING	CORD <sup>1</sup>	PLUG <sup>2</sup>	FINISH	OPTIONS
ABV4 = Albeo® Highbay ABV 4 <sup>th</sup> Gen	0 = 120-277	09 = 9,000lm	70 Plus CRI	W1 = 120° No Lens	QQ = Dimming leads not externally accessible	ST = Standard	K = Knockout	Q = None	WHITE = White	Blank = No Special Options
	1 = 120	12 = 12,000lm	47 = 4000k	WD = 120° Diffused <sup>13</sup>	QV = 0-10V Dimming	SM = Surface Mount	A = 6ft. 18ga black cord	A = 15A Straight Plug	BLACK = Black	1PK = Single Pack for distributor stocking. Default is Job Pack (7-21).
	4 = 277	15 = 15,000lm	57 = 5000k	M1 = 55° Diffused <sup>14</sup>	Daintree® Networked:	22 = 1/2" Threaded rod mount kit (Rod and nut not included)	B = 12ft. 18ga black cord	B = 20A Straight Plug		E20 <sup>5,6,10,11</sup> = Emergency Unit 20W
	D = 347	18 = 18,000lm	80 Plus CRI	N1 = 30° Diffused <sup>14</sup>	NA = Occupancy & Ambient Light Sensor, w/ Continuous Dimming (full feature)	23 = 3/4" Pendant Mount Kit	C = 15ft. 18ga black cord	C = 15A Twist Lock Plug		GTD <sup>7</sup> = Generator Transfer Device
	5 = 480	24 = 24,000lm	38 = 3000k		TQ <sup>3</sup> = Wireless Daintree® Enabled (no sensor)	41 = Y-Cable/ Hook 5ft.	D = 20ft. 18ga black cord	D = 20A Twist Lock Plug		WC = White Cord
		30 = 30,000lm	C8 = 3500k		Daintree® EZ Connect:	42 = Y-Cable/ Hook 10ft.				
		36 = 36,000lm	48 = 4000k		DF = Occupancy & Ambient light sensor w/ Continuous Dimming	43 = Y-Cable/ Hook 15ft.				
		48 = 48,000lm	58 = 5000k		Daintree® One:	44 = Y-Cable/ Hook 20ft.				
		60 = 60,000lm	90 Plus CRI		FB = Occupancy & Ambient Light Sensor with Continuous Dimming		Specialty Modular Cord Sets <sup>2A</sup> :			
		72 = 72,000lm	C9 = 3500k		3 <sup>rd</sup> Party Options <sup>4</sup> :		FS = Reloc 10ft 18ga White Cord			
		90 = 90,000lm	49 = 4000k		QA = Occupancy Sensor On/Off 360° LSXR, No External Wiring		GS = Reloc 15ft 18ga White Cord			
					QB <sup>12</sup> = Occupancy Sensor Continuous Dimming 360° LSXR		MF = Plug-N-Go - 3ft. 18ga Black Cord			
					QP = Daylight Sensor w/occupancy On/Off LSXR, No External Wiring, Full Featured		HF = Plug-N-Go - 10ft. 18ga Black Cord			
							LE <sup>9</sup> = ACS - MC Flex3+ 10ft 2EA 10-LW 277/480 #16AWG			
							NE <sup>9</sup> = ACS - MC Flex3+ 12ft 2EA 12-LW 277/480 #16AWG			

1 3-conductor cords. Dimming leads separate if controls option QV is selected. Contact factory if 5-conductor cord is needed.

2 Must specify discrete voltage. See NEMA Plug Type Table.

3 TQ not available with 72/90 Lumen or D/5 Voltage.

4 QA, QB, QP not available with 72/90 Lumen.

5 Emergency unit and 347/480VAC version not available with mounting SM and 23.

6 Contact manufacturer for specialty and regular cord feasibility

7 GTD with 347/480V contact factory

8 Contact factory for lead-time.

9 Available with Voltage 4 or 5 only

10 Not available with GTD

11 Only available with Single Pack

12 QB not available with 480V

13 WD is Polycarbonate lens

14 M1 and N1 are Acrylic lenses

#### NOTE:

See WHS20 spec sheet for default program parameters and occupancy detection patterns.

- Daintree Wireless Controls can be upgraded over time for greater functionality.
- WHR1 Remote PN: 93131632
- Daintree EZ Connect App can be downloaded on the Apple® App Store.
- 40ft (12m) mounting height.



# ABV4 Series

LED High Bay Lighting

## Ordering Information

### CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

70 CRI @ 4000K OR 5000K CCT							
LUMEN PACKAGE	TYPICAL DELIVERED LUMENS	TYPICAL POWER		TYPICAL LPW 120-277V	TYPICAL LPW 347V	MODULE BODY	TYPICAL LUMEN IN EMERGENCY MODE
		120-277V	347/480V				
09	9,000	46	48	197	188	1S	3755
12	12,000	61	63	196	190	1S	3794
15	15,000	78	79	192	189	1S	3789
18	18,000	97	95	187	190	1S	3800
24	24,000	135	133	178	181	1S	3614
30	29,000	173	171	167	170	1S	3401
36	36,000	194	192	184	187	2S	3747
48	48,000	271	266	177	180	2S	3603
60	60,000	319	314	188	191	2D	3822
72	72,000	370	364	195	198	3D	3959
90	90,000	477	470	189	192	3D	3832

LPW/LUMEN SPECS BASED ON WIDE DISTRIBUTION

De-rate 5°C for "SM" Surface Mount Option








Add 7W for "E20" option and 10W for "E20" with 347/480V input. (Charging Load)

OPTIC CODE	OPTIC DESCRIPTION	OUTPUT
W1	120° No Lens	100%
WD	120° Diffused Lens	93%
M1	55° Textured Diffused Lens	94%
N1	30° Textured Diffused Lens	95%

CRI	LUMENS	CCT	LUMEN PACKAGE OUTPUT
70	All Lumen	4000	100%
		5000	100%
5000		92%	
4000		92%	
3500		90%	
3000		87%	
90		3500	81%
		4000	83%

NEMA PLUG TYPE				
VOLTAGE	A (15A STRAIGHT)	B (20A STRAIGHT)	C (15A TWIST LOCK)	20D (1 A TWIST LOCK)
120	5-15P	5-20P	L5-15P	L5-20P
277	7-15P	7-20P	L7-15P	L7-20P
347	24-15P	24-20P	N/A	L24-20P
480	N/A	N/A	N/A	L8-20P

### MOUNTING AND ACCESSORIES:

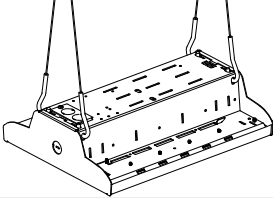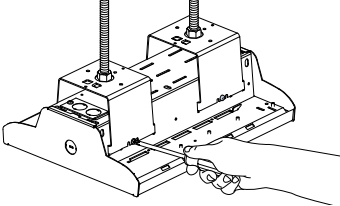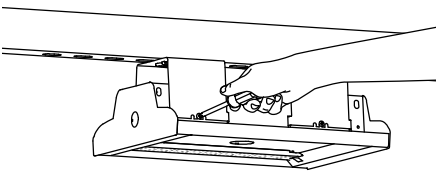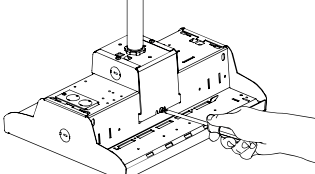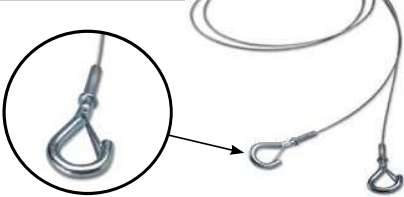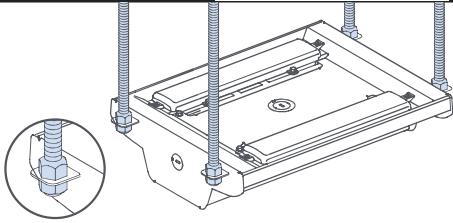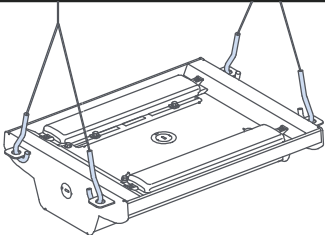MOUNTING OPTIONS	IMAGE	ORDER LOGIC CODE	AFTERMARKET ORDER LOGIC
<b>Standard Chain/ Cable Mount</b> Available on all fixture configurations (chain not included). Y-Cable w/hook can be ordered as an accessory.		<b>ST</b> = Standard (No chain or mounting hardware included)	<b>Aftermarket: NA</b>
<b>Rod Mount (optional)</b> Available on all fixture configurations. Attaches to 1/2" threaded rod (rod and nuts not included).		<b>22</b> = 1/2" Threaded Rod Kit	<b>SKU:</b> 93120346G <b>Description:</b> 1/2" Surface Mounting Kit <b>NOTE:</b> Kit included two (2) brackets.
<b>Surface Mount (optional)</b> Available on all fixture configurations. Attaches to structural member in ceiling. (Hardware not included.)		<b>SM</b> = Surface Mount	
<b>Pendant Mount (optional)</b> Available on all fixture configurations. Attaches to 3/4" threaded conduit. (conduit not included).		<b>23</b> = 3/4" Pendant Mount Kit	<b>SKU:</b> 93120347G <b>Description:</b> 3/4" Pendant Mounting Kit
<b>Y-Cable w/hook (optional)</b> Use with Standard Mounting Option only. Order separately. Price adder per pair. 5 ft., 10 ft., 15 ft., 20 ft. lengths available.			<b>(41) Y-Cable/Hook 5ft:</b> 93075756G <b>(42) Y-Cable/Hook 10ft:</b> 93075552G <b>(43) Y-Cable/Hook 15ft:</b> 93075553G <b>(44) Y-Cable/Hook 20ft:</b> 93075554G
<b>Standard Inverted Mount</b> Available on all fixture configurations. Attaches to 3/8" threaded rod (rod not included)		<b>UP</b> = Standard Inverted Mount	<b>Aftermarket: NA</b> <b>NOTE:</b> Dimensions center hole to center hole of inverted mount are: <b>Single-Wide (1S, 2S, 3S housings):</b> Width 7.4" <b>Double-Wide (1D, 2D, 3D housings):</b> Width 12.06" <b>Lengths:</b> 14.87" (1S/1D), 28.42" (2S, 2D), 41.97" (3S, 3D)
<b>Inverted Y- Cable Mount</b>		<b>61</b> = Inverted Mount Y-Cable/ Hook 5ft <b>62</b> = Inverted Mount Y-Cable/ Hook 10ft <b>63</b> = Inverted Mount Y-Cable/ Hook 15ft <b>64</b> = Inverted Mount Y-Cable/ Hook 20ft	<b>Aftermarket: NA</b> <b>NOTE:</b> Dimensions center hole to center hole of inverted mount are: <b>Single-Wide (1S, 2S, 3S housings):</b> Width 7.4" <b>Double-Wide (1D, 2D, 3D housings):</b> Width 12.06" <b>Lengths:</b> 14.87" (1S/1D), 28.42" (2S, 2D), 41.97" (3S, 3D)


## CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## REPLACEMENT LENSES & OPTICS:



ORDERING SKU	ORDERING CAT# LOGIC	FIXTURE CAT# LOGIC	DESCRIPTION
93075866G	Wide Diffused Lens Kit	Optics = WD	Diffused Lens Only (2 Lenses) <small>*does not change beam angle</small>
93075989G	Reflector Optic Kit	Optics = WD	120 Degree Optic (2 White Reflectors)
93117671G	M1 Optic Kit	Optics = M1	Textured Diffused 55 degree Optic (2 Refractors)
93117672G	N1 Optic Kit	Optics = N1	Textured Diffused 30 Degree Optic (2 Refractors)

Check fixture images on pg. 1 to determine how many optics are needed based on housing type.

Example: 60T lumen code = '2D' housing = 8 lenses and/or optics needed = 4 kits

## WIRE GUARDS:



ORDERING SKU	DESCRIPTION
93077600G	1S Wire Guard White Painted - 5pk
93077602G	2S Wire Guard White Painted - 5pk
93077604	3S Wire Guard White Painted - 5pk
93077668G	2D Wire Guard White Painted - 5pk


## FIELD SWAPPABLE WHS20 SENSOR ACCESSORIES:




ORDERING SKU	ORDERING CAT# LOGIC	DESCRIPTION
93134999G	WHS20_LOW_LENS_KIT_10	Low Lens: 2.5m (8ft) - 10pk
93135001G	WHS20_MED_LENS_KIT_10	Med Lens: 6m (20ft) - 10pk
93135003G	WHS20_HIGH_LENS_KIT_10	High Lens: 12m (40ft) - 10pk
93134985G	WHS20_SNAP_AISLE_MASK_KIT_10	Snap on Aisle Mask

NOTE: See WHS20 spec sheet for Occupancy Detection Patterns


### 1S MODULE - 9K, 12K, 15K, 18K, 24K, 30K LUMENS

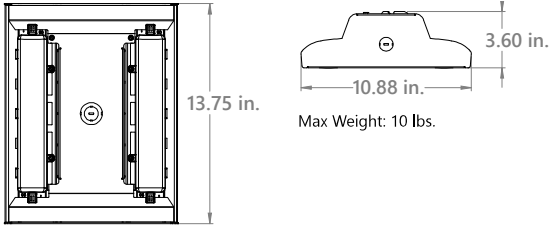


### 2S MODULE - 36K, 48K LUMENS

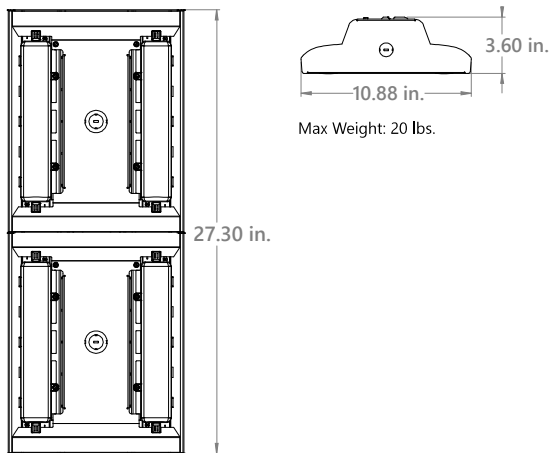

### 2D MODULE - 60K LUMENS

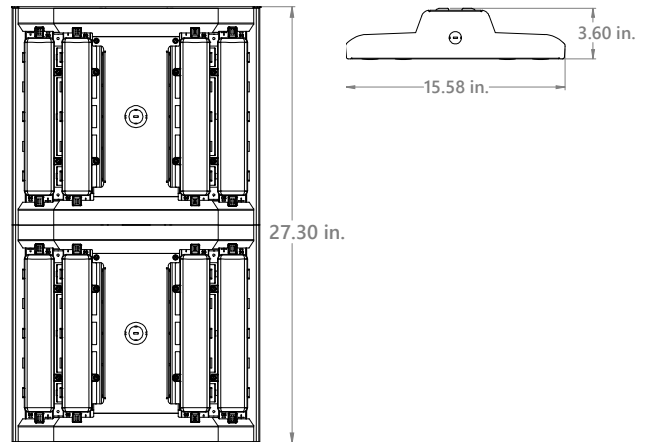


### 3D MODULE - 72K, 90K LUMENS

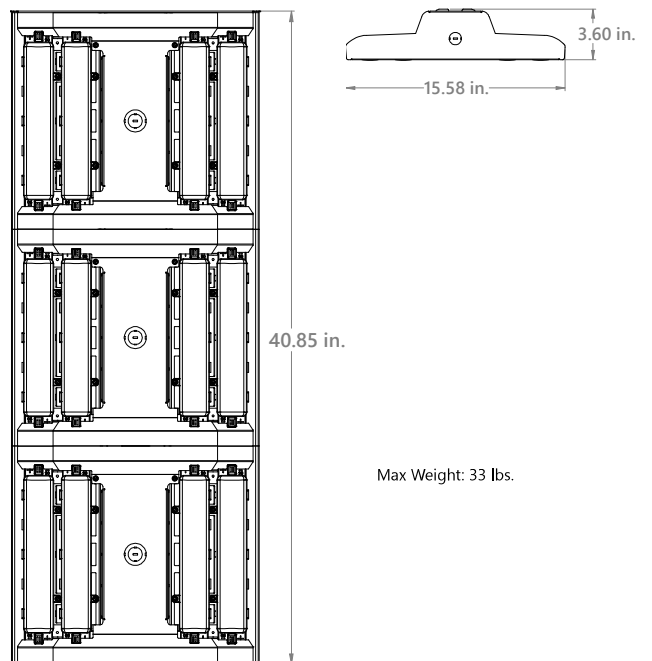


## PHOTOMETRIC DATA


### W1 = WIDE

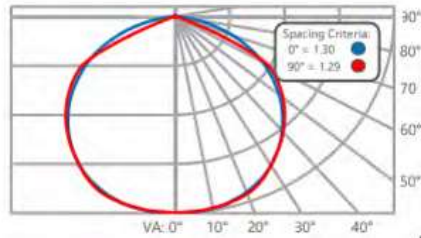


### WD = WIDE DIFFUSED

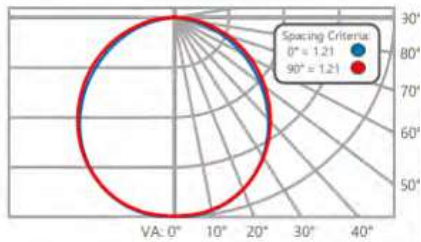

### M1 = MEDIUM

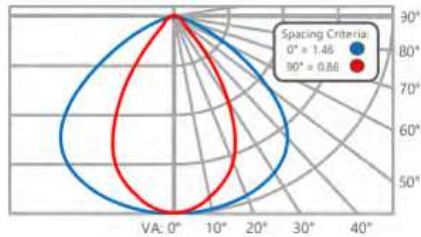

### N1 = NARROW

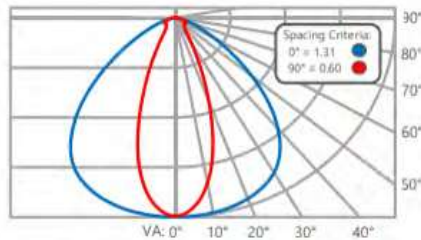

## WIRELESS NETWORKING AND SENSING DEVICE OPTIONS\*

- **Daintree® One:** Wireless fixture integrated sensor that is perfect for single fixtures or small area applications. Standalone wireless lighting controls that work independently. Comes preset from the factory, yet can be upgraded to Daintree EZ Connect and/or Daintree Enterprise in the future. Factory preset to shut off 20 minutes after the space is vacated of occupants. Daylight harvesting preset enabled on.
- **Daintree® EZ Connect:** Wireless fixture integrated sensor that is designed for room based controls where a group of fixtures communicate to each other and communicate wirelessly in chorus as a system. The advantage is simple, minimal field based commissioning. Factory preset to shut off 20 minutes after the space is vacated of occupants. No daylight harvesting set in initial preset. EZ Connect wireless lighting controls are set up and/or can be changed by the Daintree EZ Connect application that can be downloaded via a smart device.
- **Daintree® Enterprise:** Wireless fixture integrated sensor technology that is ideal for multisite lighting system management. System requires software and commissioning. Monitor multiple controls, lighting, energy, HVAC with unlimited potential for other (3rd party) sensor integration. "Open on the bottom" means that ZigBee communication protocol is an industry standard with countless wireless hardware sensing options. "Open on the top" means that the data from the sensors can be used by any 3rd party software supplier/developer, be it part of a complete BMS system or simple API (Application Programming Interface or "App"). Daintree Enterprise offers a complete future proof solution from any Daintree enabled installed base of fixtures.

\*Contact Factory for specific option availability

### WHR1 IR REMOTE



### ABV4 WITH OPTIONAL DAINTREE WIRELESS WHS20 CONTROL MODULE

