

# Albeo® ALC6 Series

## LED Linear Industrial Low Bay



CUSTOMER NAME \_\_\_\_\_

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

The **Albeo® ALC6 Series** LED luminaire is an efficient alternative to less decorative linear fixtures for a variety of commercial/industrial, low bay, stairwell garage lighting uses. While ideal for industrial applications, the sleek, attractive extruded design is attractive for retail and commercial settings too! ALC6 can be matched with Daintree® motion, daylight and wireless controls from stand alone operation, zone based control or fully networked solutions for increased energy savings. Designed to meet recommended luminance and illuminance requirements for low bay and task level lighting applications, a wide diffuser option is available for parking garage & general lighting applications as well.

### CONSTRUCTION

<b>Housing:</b>	Aluminum extruded body
<b>Lens:</b>	Polycarbonate diffused, acrylic clear
<b>Paint:</b>	Powder coat post painted <i>No glass in housing or lenses</i>
<b>Weight:</b>	4 ft. - 11lbs max; 8 ft. - 19lbs max

### PERFORMANCE

<b>Distribution:</b>	120° Diffused Lens & 160° Wide Clear Lens
<b>Lumens:</b>	2,000–20,000 lumens
<b>Efficacy:</b>	Up to 160 LPW
<b>CCT:</b>	3000K, 3500K, 4000K, 5000K
<b>CRI:</b>	80 CRI Standard (90CRI Contact factory for lead-times)

### ELECTRICAL

<b>Input Voltage:</b>	120–277V, 347V, or 480V
<b>Input Frequency:</b>	50/60 Hz
<b>LED Driver Type:</b>	Class 2, 3kV surge protection
<b>Power Factor (PF)*:</b>	>0.9*
<b>Total Harmonic Distortion (THD)*:</b>	<20%*
<b>EMI:</b>	FCC CFR Title 47 Part 15, Class A

\* PF and THD may vary with options

### CONTROLS

<b>Standard Dimming:</b>	0–10VDC
<b>Minimum Dimming:</b>	Dim down to 10%
<b>Stairwell Applications:</b>	Sensor W = Bi-level dimming Dims to 25% with low traffic and then to off for max energy savings. Compatible with EMBB.

### LUMINAIRE AMBIENT TEMPERATURE

TYPE	TEMPERATURE RATE
<b>OPERATING TEMPERATURE</b>	–30°C to +50°C (–22°F to 122°F)
<b>STORAGE TEMPERATURE</b>	–40°C to +70°C (–40°F to 158°F)

### LUMEN MAINTENANCE

<b>LXX(10K) @ Hours</b> 100,000 HR
<b>L70</b>
TM-21 Calculation at 25°C: L90 @ 100,000 hrs

### ADDITIONAL FEATURES

- **Typical Mounting:** Standard Chain/Cable or Surface mount ready
- **Standard:** knockout access (no cord, no plug)
  - 6 ft. 18-3 - Cord A
  - 12 ft. 18-3 - Cord B
  - 15A, 20A, Straight or twist lock plug – Plug A,B,C, or D

### DESIGN LIFE & WARRANTY

- **Reliability Testing:** Components and/or systems evaluation at extreme conditions and monitored during production.
- Please refer to the DLC QPL website for the latest and most complete information: <http://www.designlights.org/QPL>
- UL 1598 Suitable for Damp Locations
- RoHS compliant
- **Current's Limited 5-year Warranty:**  
Please refer to document [ALB048](#) for more information.

# Albeo® ALC6 Series

## LED Linear Industrial Low bay

### Catalog Logic and Accessories

#### CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## ORDERING INFORMATION

### ALC6

### T

### W

PRODUCT ID	VOLTAGE	FIXTURE LENGTH	LUMEN OUTPUT	PERFORMANCE LEVEL	LED COLOR TEMP	OPTICS BEAM	FIXTURE TYPE	SENSOR/WIRELESS	CONTROL WIRING	EMERGENCY	MOUNTING	CORD	PLUG	FINISH	OPTIONS												
ALC6 = Albeo Linear ALC Series 6 <sup>th</sup> Gen	0 = 120-277 1 = 120* 4 = 277* D = 347* 5 = 480*  *Specify single voltage if plug, sensor, or wireless needed.	4T = 4 ft	02 = 2,000 03 = 3,000 04 = 4,000 05 = 5,000 06 = 6,000 08 = 8,000 10 = 10,000	T = Standard Efficiency	80 Plus CRI 38 = 3000K C8 = 3500K 48 = 4000K 58 = 5000K 90 Plus CRI 39 = 3000K C9 = 3500K 49 = 4000K 59 = 5000K	Diffused Lens = Maximum Glare Reduction 1D = 120° Diffused Lens WC = Wide Clear 160° Parking Garage Optic	S = Stand Alone C = Continuous Runs  Note = For Continuous Runs, Starter Kit 93094637 must be ordered for each run.	Q = None A = Occ Sense On/Off 360° LSXR B = Occ Sense High-Low Dimming 360° LSXR P = Daylight Sense W/ Occupancy On/Off LSXR W = Bi-Level Dimming/ Stairwell Setting Sensor  Full Featured 1 = 20' Motion Sensor FSP221 W/Daylight & High/Low Dimming 2 = 40' Motion Sensor FSP221 W/Daylight & High/Low Dimming (Requires remote to modify default settings sold separately)	Q = None/ No External Control Wiring V = External 0-10V Control Wires Note = V option not available with dimming & ZigBee sensors	Q = None E = Battery Backup Note = Battery Backup not available at 347/480V	ST = Standard 51 = Cable/ Tongle 5ft. 52 = Cable/ Tongle 10ft. 53 = Cable/ Tongle 15ft.	K = Knockout A = 6ft. 18ga cord B = 12ft. 18ga cord	Q = None A = 15A Straight Plug B = 20A Straight Plug C = 15A Twistlock Plug D = 20A Twistlock Plug	W = White Powder Coat	Blank = No Special Options 1PK = Single Pack (For distributor stocking. Default is job pack not 1PK).												
		8T = 8 ft	04 = 4,000 06 = 6,000 08 = 8,000 10 = 10,000 12 = 12,000 16 = 16,000 20 = 20,000																								
		*Specify single voltage if plug, sensor, or wireless needed.																									
		Daintree® EZ Connect: DF = Occupancy & Ambient light sensor w/ Continuous Dimming																									
		Daintree® One: FB = Occupancy & Ambient Light Sensor with Continuous Dimming																									
		Daintree® Networked: NA = Occupancy & Ambient Light Sensor, w/ Continuous Dimming (full feature) TQ <sup>1</sup> = Wireless Daintree® Enabled (no sensor)																									

#### ORDERING NOTES:

- DF, FB, and NA only available for Stand Alone fixture type.

80 CRI @ 5000K CCT					
FIXTURE LENGTH	OUTPUT LUMENS	TYPICAL DELIVERED LUMENS	TYPICAL POWER		TYPICAL LPW 120-277V
			120-277V	347/480V	
4 ft	2,000	2,000	14	16	143
4 ft	3,000	3,000	20	22	150
4 ft	4,000	4,000	27	29	148
4 ft	5,000	4,900	34	36	144
4 ft	6,000	5,900	42	44	140
4 ft	8,000	7,800	59	67	132
4 ft	10,000	9,600	80	87	120
8 ft	4,000	4,000	25	28	160
8 ft	6,000	6,000	38	41	158
8 ft	8,000	7,900	52	60	152
8 ft	10,000	9,900	67	75	148
8 ft	12,000	11,800	83	91	142
8 ft	16,000	15,600	118	129	132
8 ft	20,000	19,200	159	173	121

ACCESSORIES, OPTIONS & PACKAGING	
<b>Emergency Battery:</b>	Integral EM battery option provides 90-minutes of emergency lighting. Design lumen output: 2000lm at 5000K 80CRI.
<b>Packaging:</b>	Standard packaging is job pack/bulk pack consisting of 1 to 4 fixtures per package reducing unpack time at the job site. Single Pack (for stocking)—Option 1PK
<b>Wire guards:</b>	White painted wire guard for added protection. Easy field installation. SKU# 93095697 Two kits needed for 8ft fixtures
<b>Continuous Run:</b>	One starter kit needed per run. SKU# 93095878. Each kit includes endcaps, starter whip, and male/female orientation adapter.

CRI	CCT	T OUTPUT
80 CRI	5000K	100%
	4000K	98%
	3500K	97%
	3000K	93%
90 CRI	5000K	89%
	4000K	85%
	3500K	83%
	3000K	81%

# Albeo® ALC6 Series

LED Linear Industrial Low bay

## Dimensions

### CUSTOMER NAME



Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_


Catalog Number \_\_\_\_\_

### ALC6 SERIES MODULAR FIXTURE

#### 4 Ft.



#### 8 Ft.



# Albeo® ALC6 Series

LED Linear Industrial Low bay





## Mounting & Accessories

### CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

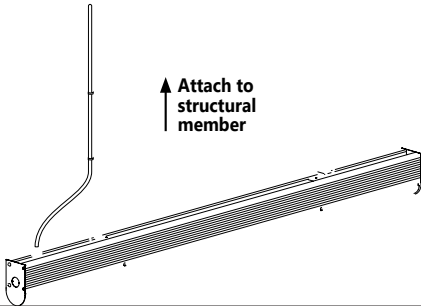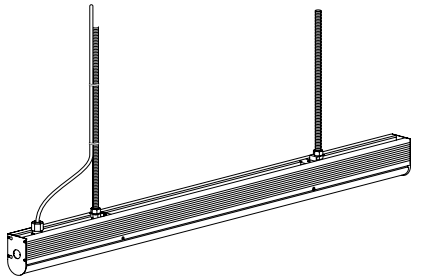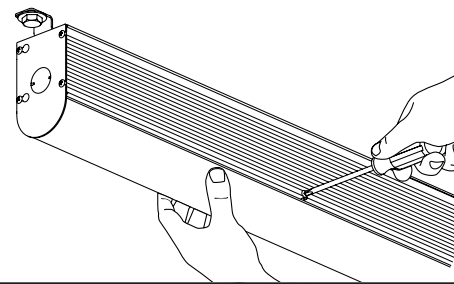MOUNTING OPTIONS	IMAGE	ORDER LOGIC CODE
<b>Standard Chain/Cable Mount</b> Available on all fixture configurations (chain not included). Cable w/ hook can be ordered as an accessory.		<b>ST</b> = Standard
<b>Rod Mount (Optional)</b> Available with all fixture configurations. Standard mounting option is rod mount ready. Attaches to 1/2" threaded rod (rod and nuts not included)		<b>ST</b> = Standard
<b>Surface Mount (Optional)</b> Available on all fixture configurations. Standard mounting option is surface mount ready.		<b>ST</b> = Standard
<b>Cable with Toggle (Optional)</b> Order separately. 5 ft., 10 ft., 15 ft., lengths available.		<b>51</b> = Cable/Toggle 5 ft. - Pair <b>52</b> = Cable/Toggle 10 ft. - Pair <b>53</b> = Cable/Toggle 15 ft. - Pair Max Load 200 lbs. Per Pair