

Optimax Radiant Series LED

Optimax Radiant Series offers:


- Higher color rendering for more accurate merchandising
- Long-term reliability
- Best-in-class lighting efficacy (Lumens/Watt)
- Best-in-class uniformity
- No direct light to shopper

Fixture Specifications:


- Voltage, 24VDC
- CCT, 3500K/4000K
- L₇₀ life, 100,000 Hours
- Uniformity, 1:1:1
- LUX: OP30 (1250), OP45 (1400), OP55 (1250)
- Avg Lux measured at 4" (OP30, OP45) and at 10" (OP55) from frame at door centerline

Driver Specifications:

- UL Class 2 Low Voltage
- Input 120-277VAC, 50/60 Hz
- Output, 24VDC, 100w Max

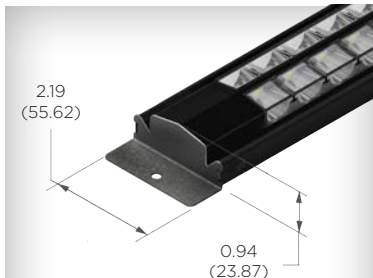

Center Fixture

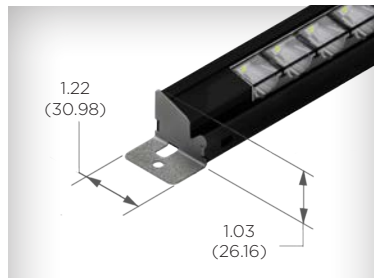

End Fixture



OP55 Center Fixture



OP30 End Fixture



OP45 End Fixture



OP55 End Fixture

Standard Lengths and Performance

OP30 CRI 85 Lumens/Watt 118	SIZE: 48		SIZE: 54		SIZE: 60		SIZE: 72	
	ACTUAL LENGTH - INCHES (MM)							
	44.64 (1134)		52.64 (1337)		60.64 (1540)		67.64 (1718)	
Location	Center	End	Center	End	Center	End	Center	End
System Wattage	15.9	7.9	15.9	7.9	18.1	9.1	18.1	9.1
Lumens	1872	936	1872	936	2140	1070	2140	1070

OP45 CRI 90 Lumens/Watt 105	SIZE: 18		SIZE: 24		SIZE: 30		SIZE: 36		SIZE: 48		SIZE: 54		SIZE: 60		SIZE: 72	
	ACTUAL LENGTH - INCHES (MM)															
	19.64 (499)		20.64 (524)		28.64 (727)		35.64 (905)		44.64 (1134)		52.64 (1337)		60.64 (1540)		67.64 (1718)	
Location	Center	End	Center	End	Center	End	Center	End	Center	End	Center	End	Center	End	Center	End
System Wattage	8.3	8.4	8.3	8.4	11.1	11.3	11.1	11.3	19.4	9.7	19.4	9.7	22.1	10.5	22.1	10.5
Lumens	871	887	871	887	1162	1182	1162	1182	2034	1016	2034	1016	2324	1103	2324	1103

OP55 CRI 94 Lumens/Watt 85	SIZE: 18		SIZE: 24		SIZE: 30		SIZE: 36		SIZE: 48		SIZE: 54		SIZE: 60		SIZE: 62		SIZE: 72	
	ACTUAL LENGTH - INCHES (MM)																	
	19.64 (499)		20.64 (524)		28.64 (727)		35.64 (905)		44.64 (1134)		52.64 (1337)		60.64 (1540)		63.00 (1160)		67.64 (1718)	
Location	Center	End	Center	End	Center	End	Center	End	Center	End	Center	End	Center	End	Center	End	Center	End
System Wattage	11.6	11.8	11.6	11.8	15.5	15.7	15.5	15.7	27.1	13.5	27.1	13.5	30.9	15.5	30.9	15.5	30.9	15.5
Lumens	986	1003	986	1003	1315	1338	1315	1338	2301	1150	2301	1150	2629	1315	2629	1315	2629	1315

System wattage shown. The information provided is subject to change without notice. All values are design or typical when measured under laboratory/store conditions. All information within this document is sole property of Anthony, Inc. and shall not be reproduced or distributed without written consent from Anthony, Inc.

Optimax **Radiant** Series LED

Optimax **Radiant** Part Numbers

OP6 Series	CRI	Nominal Length	CENTER : 60-22943		LEFT END : 60-22944		RIGHT END : 60-22945	
			3500K	4000K	3500K	4000K	3500K	4000K
OP30	85	48	-30348	-30448	-30348	-30448	-30348	-30448
		54	-30354	-30454	-30354	-30454	-30354	-30454
		60	-30360	-30460	-30360	-30460	-30360	-30460
		72	-30372	-30472	-30372	-30472	-30372	-30472
OP45	90	18	-49318	-49418	-49318	-49418	-49318	-49418
		24	-49324	-49424	-49324	-49424	-49324	-49424
		30	-49330	-49430	-49330	-49430	-49330	-49430
		36	-49336	-49436	-49336	-49436	-49336	-49436
		48	-49348	-49448	-49348	-49448	-49348	-49448
		54	-49354	-49454	-49354	-49454	-49354	-49454
		60	-49360	-49460	-49360	-49460	-49360	-49460
		72	-49372	-49472	-49372	-49472	-49372	-49472
OP55	94	18	-59318	-59418	-59318	-59418	-59318	-59418
		24	-59324	-59424	-59324	-59424	-59324	-59424
		30	-59330	-59430	-59330	-59430	-59330	-59430
		36	-59336	-59436	-59336	-59436	-59336	-59436
		48	-59348	-59448	-59348	-59448	-59348	-59448
		54	-59354	-59454	-59354	-59454	-59354	-59454
		60	-59360	-59460	-59360	-59460	-59360	-59460
		62	-59362	-59462	-59362	-59462	-59362	-59462
		72	-59372	-59472	-59372	-59472	-59372	-59472

