

LEDVANCE Luminaires

AREA FLOOD

SUPERIOR CLASS

Application

The LEDVANCE Superior Class Area Flood luminaires boast a 10 year warranty and are TAA compliant. An optional sensor can be installed to allow for daylight harvesting and provides additional energy savings. Each luminaire ships with a universal mounting bracket allowing easy installation to round and square poles or slipfitters.

Benefits and Features

- Integrated 7 pin photocontrol receptacle compatible with Standard NEMA photocell or 5 pin and 7 pin controllers. Shorting cap included.
- DLC 5.1 Premium listed to maximize rebate opportunities and to provide even, uniform lighting
- IP65 rated body offered in a modern and sleek design
- 3G Vibration rated
- Optional photosensor provides additional energy savings
- Up to 160 LPW
- 3000K, 4000K or 5000K color temperature
- CRI >80
- Offered in 3 wattage selectable versions:
 - 50, 70, 100; 120, 150, 190; or 240, 270, 290 watts
 - Up to 15,900; up to 30,300; up to 43,800 lumens respectively
- Type II, III, IV, V or Front Row distribution
- Energy savings up to 77%

Electrical

- 120-277VAC (UNV) or 277-480VAC (HUV)
- Power Factor >0.9
- THD <20%
- Continuous 0-10V dimmable down to 10% of power
- 0-10V ANSI C137.1 (9V)
- Surge protection: 10kV

Rated Life

- 150,000 hours (L₇₀) – 100W and 190W
- 130,000 hours (L₇₀) – 290W

Warranty

- 10-year warranty (if operated up to 114°F/45°C) or 7-year warranty (if operated up to 122°F/50°C)
- NLB Trusted Warranty Program



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
70W HPS	91	50	45%
100W HPS	120	50	58%
100W MH	130	50	62%
100W HPS	120	70	42%
100W MH	130	70	46%
150W HPS	170	70	59%
150W MH	188	70	63%
175W MH	210	100	52%
175W MH	210	100	52%
250W MH	290	100	66%
250W HPS	295	100	66%
250W MH	290	120	59%
250W HPS	295	120	59%
320W MH	370	150	59%
400W HPS	460	150	67%
400W MH	450	150	67%
750W MH	820	190	77%
750W HPS	840	190	77%
400W HPS	460	240	48%
400W MH	450	240	47%
750W MH	820	270	67%
750W HPS	840	270	68%
1000W MH	1080	290	73%
1000W HPS	1100	290	74%

Operating Temperature

- -40°F to +122°F (-40°C to +50°C)

Certifications and Listings

- cULus listed to UL1598 standards, wet location
- RoHS
- FCC
- IP65
- DLC 5.1 Premium
- TAA
- Dark Sky Compliant*
- Luna Qualified

*DLC LUNA and Dark Sky Compliant for 3000K products with fixed mounting bracket only



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Installation

- Universal mounting bracket for round/square pole and slipfitter mounting
- Fixed mounting bracket with 0° tilt for round/square pole mounting – required for Dark Sky Compliance

Additional Specifications

- Specifications subject to change without notice. IES files available online.
- Cast aluminum alloy housing with powder coat paint finish and UV stabilized polycarbonate lens. The standard colors are bronze and white.

Ordering Guide

AREAFLD	4A	/	SXXX	XXV	D	8	XX	XX	/	XX	/	XXX
Product Name	Generation		Selectable Wattage	Voltage	Dimming	CRI	Color Temp	Distribution		Color / Finish		Options
AREAFLD = Area Floodlight Luminaire	4A = Generation 4A		S100 = 50, 70 or 100W S190 = 120, 150 or 190W S290 = 240, 270 or 290W	UNV = 120-277V HUV = 277-480V	D = 0-10V Dimming	8 = >80	30 = 3000K 40 = 4000K 50 = 5000K	T2 = Type II T3 = Type III T4 = Type IV T5 = Type V FR = Front Row		BZ = Bronze BL = Black* GR = Gray* WH = White*		BLE = Bluetooth Zhaga Sensor D = Daylight/Motion Sensor**

*MTO finishes – Other MTO finishes available upon request; contact Sales Rep.

**Daylight/Motion Sensor MTO only

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	Dimming	CRI	Color Temp	Distribution	Total Fixture Lumens (lm)	DLC	LPW	Options	 MTO*	BUG Rating
62844	AREAFLD4A/S100UNVD830/FR/BZ	50/70/100	120-277V	0-10V	>80	3000K	Front Row	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65773	AREAFLD4A/S100UNVD830/T2/BZ	50/70/100	120-277V	0-10V	>80	3000K	Type II	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65774	AREAFLD4A/S100UNVD830/T3/BZ	50/70/100	120-277V	0-10V	>80	3000K	Type III	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65775	AREAFLD4A/S100UNVD830/T4/BZ	50/70/100	120-277V	0-10V	>80	3000K	Type IV	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65776	AREAFLD4A/S100UNVD830/T5/BZ	50/70/100	120-277V	0-10V	>80	3000K	Type V	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
62845	AREAFLD4A/S100UNVD840/FR/BZ	50/70/100	120-277V	0-10V	>80	4000K	Front Row	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65777	AREAFLD4A/S100UNVD840/T2/BZ	50/70/100	120-277V	0-10V	>80	4000K	Type II	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65778	AREAFLD4A/S100UNVD840/T3/BZ	50/70/100	120-277V	0-10V	>80	4000K	Type III	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65779	AREAFLD4A/S100UNVD840/T4/BZ	50/70/100	120-277V	0-10V	>80	4000K	Type IV	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65780	AREAFLD4A/S100UNVD840/T5/BZ	50/70/100	120-277V	0-10V	>80	4000K	Type V	7750/10,850/14,700	5.1 Prm	155	–	–	B4U0G2
62846	AREAFLD4A/S100UNVD850/FR/BZ	50/70/100	120-277V	0-10V	>80	5000K	Front Row	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65781	AREAFLD4A/S100UNVD850/T2/BZ	50/70/100	120-277V	0-10V	>80	5000K	Type II	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65782	AREAFLD4A/S100UNVD850/T3/BZ	50/70/100	120-277V	0-10V	>80	5000K	Type III	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65783	AREAFLD4A/S100UNVD850/T4/BZ	50/70/100	120-277V	0-10V	>80	5000K	Type IV	7750/10,850/14,700	5.1 Prm	155	–	MT0	B4U0G2
65784	AREAFLD4A/S100UNVD850/T5/BZ	50/70/100	120-277V	0-10V	>80	5000K	Type V	7750/10,850/14,700	5.1 Prm	155	–	–	B4U0G2
63141	AREAFLD4A/S190UNVD830/FR/BZ	120/150/190	120-277V	0-10V	>80	3000K	Front Row	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65749	AREAFLD4A/S190UNVD830/T2/BZ	120/150/190	120-277V	0-10V	>80	3000K	Type II	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65750	AREAFLD4A/S190UNVD830/T3/BZ	120/150/190	120-277V	0-10V	>80	3000K	Type III	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65751	AREAFLD4A/S190UNVD830/T4/BZ	120/150/190	120-277V	0-10V	>80	3000K	Type IV	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65752	AREAFLD4A/S190UNVD830/T5/BZ	120/150/190	120-277V	0-10V	>80	3000K	Type V	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
63142	AREAFLD4A/S190UNVD840/FR/BZ	120/150/190	120-277V	0-10V	>80	4000K	Front Row	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65753	AREAFLD4A/S190UNVD840/T2/BZ	120/150/190	120-277V	0-10V	>80	4000K	Type II	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65754	AREAFLD4A/S190UNVD840/T3/BZ	120/150/190	120-277V	0-10V	>80	4000K	Type III	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65755	AREAFLD4A/S190UNVD840/T4/BZ	120/150/190	120-277V	0-10V	>80	4000K	Type IV	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65756	AREAFLD4A/S190UNVD840/T5/BZ	120/150/190	120-277V	0-10V	>80	4000K	Type V	18,000/22,500/28,500	5.1 Prm	150	–	–	B4U0G2
63143	AREAFLD4A/S190UNVD850/FR/BZ	120/150/190	120-277V	0-10V	>80	5000K	Front Row	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65757	AREAFLD4A/S190UNVD850/T2/BZ	120/150/190	120-277V	0-10V	>80	5000K	Type II	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65758	AREAFLD4A/S190UNVD850/T3/BZ	120/150/190	120-277V	0-10V	>80	5000K	Type III	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65759	AREAFLD4A/S190UNVD850/T4/BZ	120/150/190	120-277V	0-10V	>80	5000K	Type IV	18,000/22,500/28,500	5.1 Prm	150	–	MT0	B4U0G2
65760	AREAFLD4A/S190UNVD850/T5/BZ	120/150/190	120-277V	0-10V	>80	5000K	Type V	18,000/22,500/28,500	5.1 Prm	150	–	–	B4U0G2
65761	AREAFLD4A/S290UNVD830/T2/BZ	240/270/290	120-277V	0-10V	>80	3000K	Type II	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65762	AREAFLD4A/S290UNVD830/T3/BZ	240/270/290	120-277V	0-10V	>80	3000K	Type III	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65763	AREAFLD4A/S290UNVD830/T4/BZ	240/270/290	120-277V	0-10V	>80	3000K	Type IV	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65764	AREAFLD4A/S290UNVD830/T5/BZ	240/270/290	120-277V	0-10V	>80	3000K	Type V	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65765	AREAFLD4A/S290UNVD840/T2/BZ	240/270/290	120-277V	0-10V	>80	4000K	Type II	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65766	AREAFLD4A/S290UNVD840/T3/BZ	240/270/290	120-277V	0-10V	>80	4000K	Type III	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65767	AREAFLD4A/S290UNVD840/T4/BZ	240/270/290	120-277V	0-10V	>80	4000K	Type IV	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65768	AREAFLD4A/S290UNVD840/T5/BZ	240/270/290	120-277V	0-10V	>80	4000K	Type V	37,200/41,850/43,000	5.1 Prm	155	–	–	B5U0G3
65769	AREAFLD4A/S290UNVD850/T2/BZ	240/270/290	120-277V	0-10V	>80	5000K	Type II	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65770	AREAFLD4A/S290UNVD850/T3/BZ	240/270/290	120-277V	0-10V	>80	5000K	Type III	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65771	AREAFLD4A/S290UNVD850/T4/BZ	240/270/290	120-277V	0-10V	>80	5000K	Type IV	37,200/41,850/43,000	5.1 Prm	155	–	MT0	B5U0G3
65772	AREAFLD4A/S290UNVD850/T5/BZ	240/270/290	120-277V	0-10V	>80	5000K	Type V	37,200/41,850/43,000	5.1 Prm	155	–	–	B5U0G3

*Made To Order

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	Dimming	CRI	Color Temp	Distribution	Total Fixture Lumens (lm)	DLC	LPW	Options	 MTO*	BUG Rating
63004	AREAFLD4A/S100UNVD830FR/BZ/BLE	50/70/100	120-277V	0-10V	>80	3000K	Front Row	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62964	AREAFLD4A/S100UNVD830T2/BZ/BLE	50/70/100	120-277V	0-10V	>80	3000K	Type II	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62965	AREAFLD4A/S100UNVD830T3/BZ/BLE	50/70/100	120-277V	0-10V	>80	3000K	Type III	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62966	AREAFLD4A/S100UNVD830T4/BZ/BLE	50/70/100	120-277V	0-10V	>80	3000K	Type IV	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62967	AREAFLD4A/S100UNVD830T5/BZ/BLE	50/70/100	120-277V	0-10V	>80	3000K	Type V	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63005	AREAFLD4A/S100UNVD840FR/BZ/BLE	50/70/100	120-277V	0-10V	>80	4000K	Front Row	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62968	AREAFLD4A/S100UNVD840T2/BZ/BLE	50/70/100	120-277V	0-10V	>80	4000K	Type II	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62969	AREAFLD4A/S100UNVD840T3/BZ/BLE	50/70/100	120-277V	0-10V	>80	4000K	Type III	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62970	AREAFLD4A/S100UNVD840T4/BZ/BLE	50/70/100	120-277V	0-10V	>80	4000K	Type IV	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62971	AREAFLD4A/S100UNVD840T5/BZ/BLE	50/70/100	120-277V	0-10V	>80	4000K	Type V	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63006	AREAFLD4A/S100UNVD850FR/BZ/BLE	50/70/100	120-277V	0-10V	>80	5000K	Front Row	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62972	AREAFLD4A/S100UNVD850T2/BZ/BLE	50/70/100	120-277V	0-10V	>80	5000K	Type II	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62973	AREAFLD4A/S100UNVD850T3/BZ/BLE	50/70/100	120-277V	0-10V	>80	5000K	Type III	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62974	AREAFLD4A/S100UNVD850T4/BZ/BLE	50/70/100	120-277V	0-10V	>80	5000K	Type IV	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62975	AREAFLD4A/S100UNVD850T5/BZ/BLE	50/70/100	120-277V	0-10V	>80	5000K	Type V	7750/10,850/14,700	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62976	AREAFLD4A/S190UNVD830T2/BZ/BLE	120/150/190	120-277V	0-10V	>80	3000K	Type II	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62977	AREAFLD4A/S190UNVD830T3/BZ/BLE	120/150/190	120-277V	0-10V	>80	3000K	Type III	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62978	AREAFLD4A/S190UNVD830T4/BZ/BLE	120/150/190	120-277V	0-10V	>80	3000K	Type IV	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62979	AREAFLD4A/S190UNVD830T5/BZ/BLE	120/150/190	120-277V	0-10V	>80	3000K	Type V	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62980	AREAFLD4A/S190UNVD840T2/BZ/BLE	120/150/190	120-277V	0-10V	>80	4000K	Type II	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62981	AREAFLD4A/S190UNVD840T3/BZ/BLE	120/150/190	120-277V	0-10V	>80	4000K	Type III	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62982	AREAFLD4A/S190UNVD840T4/BZ/BLE	120/150/190	120-277V	0-10V	>80	4000K	Type IV	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62983	AREAFLD4A/S190UNVD840T5/BZ/BLE	120/150/190	120-277V	0-10V	>80	4000K	Type V	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62984	AREAFLD4A/S190UNVD850T2/BZ/BLE	120/150/190	120-277V	0-10V	>80	5000K	Type II	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62985	AREAFLD4A/S190UNVD850T3/BZ/BLE	120/150/190	120-277V	0-10V	>80	5000K	Type III	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62986	AREAFLD4A/S190UNVD850T4/BZ/BLE	120/150/190	120-277V	0-10V	>80	5000K	Type IV	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62987	AREAFLD4A/S190UNVD850T5/BZ/BLE	120/150/190	120-277V	0-10V	>80	5000K	Type V	18,000/22,500/28,500	5.1 P _{rm}	150	Bluetooth Zhaga Sensor	MTO	B4U0G2
62988	AREAFLD4A/S290UNVD830T2/BZ/BLE	240/270/290	120-277V	0-10V	>80	3000K	Type II	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62989	AREAFLD4A/S290UNVD830T3/BZ/BLE	240/270/290	120-277V	0-10V	>80	3000K	Type III	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62990	AREAFLD4A/S290UNVD830T4/BZ/BLE	240/270/290	120-277V	0-10V	>80	3000K	Type IV	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62991	AREAFLD4A/S290UNVD830T5/BZ/BLE	240/270/290	120-277V	0-10V	>80	3000K	Type V	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62992	AREAFLD4A/S290UNVD840T2/BZ/BLE	240/270/290	120-277V	0-10V	>80	4000K	Type II	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62993	AREAFLD4A/S290UNVD840T3/BZ/BLE	240/270/290	120-277V	0-10V	>80	4000K	Type III	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62994	AREAFLD4A/S290UNVD840T4/BZ/BLE	240/270/290	120-277V	0-10V	>80	4000K	Type IV	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62995	AREAFLD4A/S290UNVD840T5/BZ/BLE	240/270/290	120-277V	0-10V	>80	4000K	Type V	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62996	AREAFLD4A/S290UNVD850T2/BZ/BLE	240/270/290	120-277V	0-10V	>80	5000K	Type II	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62997	AREAFLD4A/S290UNVD850T3/BZ/BLE	240/270/290	120-277V	0-10V	>80	5000K	Type III	37,200/41,850/43,000	5.1 P _{rm}	155	Bluetooth Zhaga Sensor	MTO	B5U0G3

*Made To Order

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	Dimming		CRI	Color Temp	Distribution	Total Fixture Lumens (lm)	DLC	LPW	Options	 MTO*	BUG Rating
62998	AREAFLD4A/S290UNVD850T4/BZ/BLE	240/270/290	120-277V	0-10V	>80	5000K	Type IV		37,200/41,850/43,000	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
62999	AREAFLD4A/S290UNVD850T5/BZ/BLE	240/270/290	120-277V	0-10V	>80	5000K	Type V		37,200/41,850/43,000	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B5U0G3
63235	AREAFLD4A/S100HUVDB830/FR/BZ	50/70/100	277-480V	0-10V	>80	3000K	Front Row		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63238	AREAFLD4A/S100HUVDB830/T2/BZ	50/70/100	277-480V	0-10V	>80	3000K	Type II		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63239	AREAFLD4A/S100HUVDB830/T3/BZ	50/70/100	277-480V	0-10V	>80	3000K	Type III		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63232	AREAFLD4A/S100HUVDB830/T4/BZ	50/70/100	277-480V	0-10V	>80	3000K	Type IV		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63240	AREAFLD4A/S100HUVDB830/T5/BZ	50/70/100	277-480V	0-10V	>80	3000K	Type V		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63236	AREAFLD4A/S100HUVDB840/FR/BZ	50/70/100	277-480V	0-10V	>80	4000K	Front Row		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63241	AREAFLD4A/S100HUVDB840/T2/BZ	50/70/100	277-480V	0-10V	>80	4000K	Type II		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63242	AREAFLD4A/S100HUVDB840/T3/BZ	50/70/100	277-480V	0-10V	>80	4000K	Type III		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63233	AREAFLD4A/S100HUVDB840/T4/BZ	50/70/100	277-480V	0-10V	>80	4000K	Type IV		7750/10,850/15,900	5.1 Prm	155	–	–	B4U0G2
63243	AREAFLD4A/S100HUVDB840/T5/BZ	50/70/100	277-480V	0-10V	>80	4000K	Type V		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63237	AREAFLD4A/S100HUVDB850/FR/BZ	50/70/100	277-480V	0-10V	>80	5000K	Front Row		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63244	AREAFLD4A/S100HUVDB850/T2/BZ	50/70/100	277-480V	0-10V	>80	5000K	Type II		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63245	AREAFLD4A/S100HUVDB850/T3/BZ	50/70/100	277-480V	0-10V	>80	5000K	Type III		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63234	AREAFLD4A/S100HUVDB850/T4/BZ	50/70/100	277-480V	0-10V	>80	5000K	Type IV		7750/10,850/15,900	5.1 Prm	155	–	–	B4U0G2
63246	AREAFLD4A/S100HUVDB850/T5/BZ	50/70/100	277-480V	0-10V	>80	5000K	Type V		7750/10,850/15,900	5.1 Prm	155	–	MTO	B4U0G2
63283	AREAFLD4A/S100HUVDB830FR/BZ/BLE	50/70/100	277-480V	0-10V	>80	3000K	Front Row		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63271	AREAFLD4A/S100HUVDB830T2/BZ/BLE	50/70/100	277-480V	0-10V	>80	3000K	Type II		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63272	AREAFLD4A/S100HUVDB830T3/BZ/BLE	50/70/100	277-480V	0-10V	>80	3000K	Type III		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63273	AREAFLD4A/S100HUVDB830T4/BZ/BLE	50/70/100	277-480V	0-10V	>80	3000K	Type IV		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63274	AREAFLD4A/S100HUVDB830T5/BZ/BLE	50/70/100	277-480V	0-10V	>80	3000K	Type V		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63284	AREAFLD4A/S100HUVDB840FR/BZ/BLE	50/70/100	277-480V	0-10V	>80	4000K	Front Row		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63275	AREAFLD4A/S100HUVDB840T2/BZ/BLE	50/70/100	277-480V	0-10V	>80	4000K	Type II		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63276	AREAFLD4A/S100HUVDB840T3/BZ/BLE	50/70/100	277-480V	0-10V	>80	4000K	Type III		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63277	AREAFLD4A/S100HUVDB840T4/BZ/BLE	50/70/100	277-480V	0-10V	>80	4000K	Type IV		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63278	AREAFLD4A/S100HUVDB840T5/BZ/BLE	50/70/100	277-480V	0-10V	>80	4000K	Type V		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63285	AREAFLD4A/S100HUVDB850FR/BZ/BLE	50/70/100	277-480V	0-10V	>80	5000K	Front Row		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63279	AREAFLD4A/S100HUVDB850T2/BZ/BLE	50/70/100	277-480V	0-10V	>80	5000K	Type II		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63280	AREAFLD4A/S100HUVDB850T3/BZ/BLE	50/70/100	277-480V	0-10V	>80	5000K	Type III		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63281	AREAFLD4A/S100HUVDB850T4/BZ/BLE	50/70/100	277-480V	0-10V	>80	5000K	Type IV		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
63282	AREAFLD4A/S100HUVDB850T5/BZ/BLE	50/70/100	277-480V	0-10V	>80	5000K	Type V		7750/10,850/15,900	5.1 Prm	155	Bluetooth Zhaga Sensor	MTO	B4U0G2
62935	AREAFLD4A/S190HUVDB830/T2/BZ	120/150/190	277-480V	0-10V	>80	3000K	Type II		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
62936	AREAFLD4A/S190HUVDB830/T3/BZ	120/150/190	277-480V	0-10V	>80	3000K	Type III		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
62937	AREAFLD4A/S190HUVDB830/T4/BZ	120/150/190	277-480V	0-10V	>80	3000K	Type IV		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
62938	AREAFLD4A/S190HUVDB830/T5/BZ	120/150/190	277-480V	0-10V	>80	3000K	Type V		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
62939	AREAFLD4A/S190HUVDB840/T2/BZ	120/150/190	277-480V	0-10V	>80	4000K	Type II		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
62940	AREAFLD4A/S190HUVDB840/T3/BZ	120/150/190	277-480V	0-10V	>80	4000K	Type III		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
62941	AREAFLD4A/S190HUVDB840/T4/BZ	120/150/190	277-480V	0-10V	>80	4000K	Type IV		19,200/24,000/30,300	5.1 Prm	160	–	–	B4U0G2
62942	AREAFLD4A/S190HUVDB840/T5/BZ	120/150/190	277-480V	0-10V	>80	4000K	Type V		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
62943	AREAFLD4A/S190HUVDB850/T2/BZ	120/150/190	277-480V	0-10V	>80	5000K	Type II		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
62944	AREAFLD4A/S190HUVDB850/T3/BZ	120/150/190	277-480V	0-10V	>80	5000K	Type III		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
62945	AREAFLD4A/S190HUVDB850/T4/BZ	120/150/190	277-480V	0-10V	>80	5000K	Type IV		19,200/24,000/30,300	5.1 Prm	160	–	–	B4U0G2
62946	AREAFLD4A/S190HUVDB850/T5/BZ	120/150/190	277-480V	0-10V	>80	5000K	Type V		19,200/24,000/30,300	5.1 Prm	160	–	MTO	B4U0G2
63007	AREAFLD4A/S190HUVDB830T2/BZ/BLE	120/150/190	277-480V	0-10V	>80	3000K	Type II		19,200/24,000/30,300	5.1 Prm	160	Bluetooth Zhaga Sensor	MTO	B4U0G2
63008	AREAFLD4A/S190HUVDB830T3/BZ/BLE	120/150/190	277-480V	0-10V	>80	3000K	Type III		19,200/24,000/30,300	5.1 Prm	160	Bluetooth Zhaga Sensor	MTO	B4U0G2
63009	AREAFLD4A/S190HUVDB830T4/BZ/BLE	120/150/190	277-480V	0-10V	>80	3000K	Type IV		19,200/24,000/30,300	5.1 Prm	160	Bluetooth Zhaga Sensor	MTO	B4U0G2
63010	AREAFLD4A/S190HUVDB830T5/BZ/BLE	120/150/190	277-480V	0-10V	>80	3000K	Type V		19,200/24,000/30,300	5.1 Prm	160	Bluetooth Zhaga Sensor	MTO	B4U0G2
63011	AREAFLD4A/S190HUVDB840T2/BZ/BLE	120/150/190	277-480V	0-10V	>80	4000K	Type II		19,200/24,000/30,300	5.1 Prm	160	Bluetooth Zhaga Sensor	MTO	B4U0G2
63012	AREAFLD4A/S190HUVDB840T3/BZ/BLE	120/150/190	277-480V	0-10V	>80	4000K	Type III		19,200/24,000/30,300	5.1 Prm	160	Bluetooth Zhaga Sensor	MTO	B4U0G2
63013	AREAFLD4A/S190HUVDB840T4/BZ/BLE	120/150/190	277-480V	0-10V	>80	4000K	Type IV		19,200/24,000/30,300	5.1 Prm	160	Bluetooth Zhaga Sensor	MTO	B4U0G2


*Made To Order

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	Dimming	CRI	Color Temp	Distribution	Total Fixture Lumens (lm)	DLC	LPW	Options	 MTO*	BUG Rating
63014	AREAFLD4A/S190HUVDB840T5/BZ/BLE	120/150/190	277-480V	0-10V	>80	4000K	Type V	19,200/24,000/30,300	5.1 Prrn	160	Bluetooth Zhaga Sensor	MT0	B4U0G2
63015	AREAFLD4A/S190HUVDB850T2/BZ/BLE	120/150/190	277-480V	0-10V	>80	5000K	Type II	19,200/24,000/30,300	5.1 Prrn	160	Bluetooth Zhaga Sensor	MT0	B4U0G2
63016	AREAFLD4A/S190HUVDB850T3/BZ/BLE	120/150/190	277-480V	0-10V	>80	5000K	Type III	19,200/24,000/30,300	5.1 Prrn	160	Bluetooth Zhaga Sensor	MT0	B4U0G2
63017	AREAFLD4A/S190HUVDB850T4/BZ/BLE	120/150/190	277-480V	0-10V	>80	5000K	Type IV	19,200/24,000/30,300	5.1 Prrn	160	Bluetooth Zhaga Sensor	MT0	B4U0G2
63018	AREAFLD4A/S190HUVDB850T5/BZ/BLE	120/150/190	277-480V	0-10V	>80	5000K	Type V	19,200/24,000/30,300	5.1 Prrn	160	Bluetooth Zhaga Sensor	MT0	B4U0G2
62947	AREAFLD4A/S290HUVDB830/T2/BZ	240/270/290	277-480V	0-10V	>80	3000K	Type II	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
62948	AREAFLD4A/S290HUVDB830/T3/BZ	240/270/290	277-480V	0-10V	>80	3000K	Type III	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
62949	AREAFLD4A/S290HUVDB830/T4/BZ	240/270/290	277-480V	0-10V	>80	3000K	Type IV	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
62950	AREAFLD4A/S290HUVDB830/T5/BZ	240/270/290	277-480V	0-10V	>80	3000K	Type V	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
62951	AREAFLD4A/S290HUVDB840/T2/BZ	240/270/290	277-480V	0-10V	>80	4000K	Type II	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
62952	AREAFLD4A/S290HUVDB840/T3/BZ	240/270/290	277-480V	0-10V	>80	4000K	Type III	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
62953	AREAFLD4A/S290HUVDB840/T4/BZ	240/270/290	277-480V	0-10V	>80	4000K	Type IV	37,200/41,850/43,800	5.1 Prrn	155	—	—	B5U0G3
62954	AREAFLD4A/S290HUVDB840/T5/BZ	240/270/290	277-480V	0-10V	>80	4000K	Type V	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
62955	AREAFLD4A/S290HUVDB850/T2/BZ	240/270/290	277-480V	0-10V	>80	5000K	Type II	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
62956	AREAFLD4A/S290HUVDB850/T3/BZ	240/270/290	277-480V	0-10V	>80	5000K	Type III	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
62957	AREAFLD4A/S290HUVDB850/T4/BZ	240/270/290	277-480V	0-10V	>80	5000K	Type IV	37,200/41,850/43,800	5.1 Prrn	155	—	—	B5U0G3
62958	AREAFLD4A/S290HUVDB850/T5/BZ	240/270/290	277-480V	0-10V	>80	5000K	Type V	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
63019	AREAFLD4A/S290HUVDB830T2/BZ/BLE	240/270/290	277-480V	0-10V	>80	3000K	Type II	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63020	AREAFLD4A/S290HUVDB830T3/BZ/BLE	240/270/290	277-480V	0-10V	>80	3000K	Type III	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63021	AREAFLD4A/S290HUVDB830T4/BZ/BLE	240/270/290	277-480V	0-10V	>80	3000K	Type IV	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63022	AREAFLD4A/S290HUVDB830T5/BZ/BLE	240/270/290	277-480V	0-10V	>80	3000K	Type V	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63023	AREAFLD4A/S290HUVDB840T2/BZ/BLE	240/270/290	277-480V	0-10V	>80	4000K	Type II	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63024	AREAFLD4A/S290HUVDB840T3/BZ/BLE	240/270/290	277-480V	0-10V	>80	4000K	Type III	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63025	AREAFLD4A/S290HUVDB840T4/BZ/BLE	240/270/290	277-480V	0-10V	>80	4000K	Type IV	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63026	AREAFLD4A/S290HUVDB840T5/BZ/BLE	240/270/290	277-480V	0-10V	>80	4000K	Type V	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63027	AREAFLD4A/S290HUVDB850T2/BZ/BLE	240/270/290	277-480V	0-10V	>80	5000K	Type II	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63028	AREAFLD4A/S290HUVDB850T3/BZ/BLE	240/270/290	277-480V	0-10V	>80	5000K	Type III	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63029	AREAFLD4A/S290HUVDB850T4/BZ/BLE	240/270/290	277-480V	0-10V	>80	5000K	Type IV	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63030	AREAFLD4A/S290HUVDB850T5/BZ/BLE	240/270/290	277-480V	0-10V	>80	5000K	Type V	37,200/41,850/43,800	5.1 Prrn	155	Bluetooth Zhaga Sensor	MT0	B5U0G3
63605	AREAFLD4A/S190HUVDB850/T2/WH	120/150/190	277-480V	0-10V	>80	5000K	Type II	19,200/24,000/30,300	5.1 Prrn	160	—	MT0	B4U0G2
63606	AREAFLD4A/S190HUVDB850/T3/WH	120/150/190	277-480V	0-10V	>80	5000K	Type III	19,200/24,000/30,300	5.1 Prrn	160	—	MT0	B4U0G2
63607	AREAFLD4A/S190HUVDB850/T4/WH	120/150/190	277-480V	0-10V	>80	5000K	Type IV	19,200/24,000/30,300	5.1 Prrn	160	—	MT0	B4U0G2
63608	AREAFLD4A/S190HUVDB850/T5/WH	120/150/190	277-480V	0-10V	>80	5000K	Type V	19,200/24,000/30,300	5.1 Prrn	160	—	MT0	B4U0G2
63609	AREAFLD4A/S290HUVDB850/T2/WH	240/270/290	277-480V	0-10V	>80	5000K	Type II	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
63610	AREAFLD4A/S290HUVDB850/T3/WH	240/270/290	277-480V	0-10V	>80	5000K	Type III	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
63611	AREAFLD4A/S290HUVDB850/T4/WH	240/270/290	277-480V	0-10V	>80	5000K	Type IV	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
63612	AREAFLD4A/S290HUVDB850/T5/WH	240/270/290	277-480V	0-10V	>80	5000K	Type V	37,200/41,850/43,800	5.1 Prrn	155	—	MT0	B5U0G3
63613	AREAFLD4A/S190UNVDB850/FR/WH	120/150/190	120-277V	0-10V	>80	5000K	Front Row	18,000/22,500/28,500	5.1 Prrn	150	—	MT0	B4U0G2
63614	AREAFLD4A/S190UNVDB850/T2/WH	120/150/190	120-277V	0-10V	>80	5000K	Type II	18,000/22,500/28,500	5.1 Prrn	150	—	MT0	B4U0G2
63615	AREAFLD4A/S190UNVDB850/T3/WH	120/150/190	120-277V	0-10V	>80	5000K	Type III	18,000/22,500/28,500	5.1 Prrn	150	—	MT0	B4U0G2
63616	AREAFLD4A/S190UNVDB850/T4/WH	120/150/190	120-277V	0-10V	>80	5000K	Type IV	18,000/22,500/28,500	5.1 Prrn	150	—	MT0	B4U0G2
63617	AREAFLD4A/S190UNVDB850/T5/WH	120/150/190	120-277V	0-10V	>80	5000K	Type V	18,000/22,500/28,500	5.1 Prrn	150	—	MT0	B4U0G2
63618	AREAFLD4A/S290UNVDB850/T2/WH	240/270/290	120-277V	0-10V	>80	5000K	Type II	37,200/41,850/43,000	5.1 Prrn	155	—	MT0	B5U0G3
63619	AREAFLD4A/S290UNVDB850/T3/WH	240/270/290	120-277V	0-10V	>80	5000K	Type III	37,200/41,850/43,000	5.1 Prrn	155	—	MT0	B5U0G3
63620	AREAFLD4A/S290UNVDB850/T4/WH	240/270/290	120-277V	0-10V	>80	5000K	Type IV	37,200/41,850/43,000	5.1 Prrn	155	—	MT0	B5U0G3
63621	AREAFLD4A/S290UNVDB850/T5/WH	240/270/290	120-277V	0-10V	>80	5000K	Type V	37,200/41,850/43,000	5.1 Prrn	155	—	MT0	B5U0G3


*Made To Order

Physical Information


100/190W

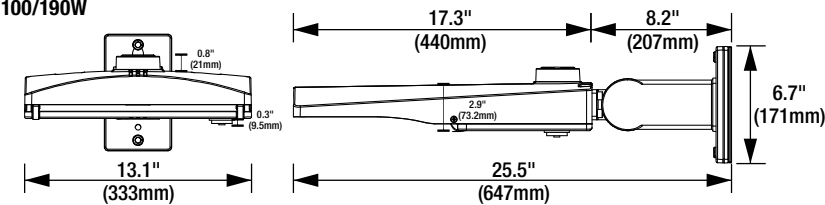



290W

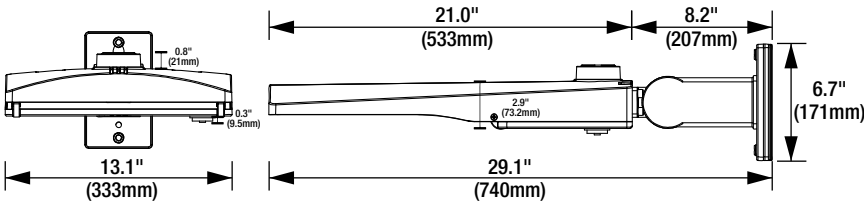


Universal Mounting Bracket

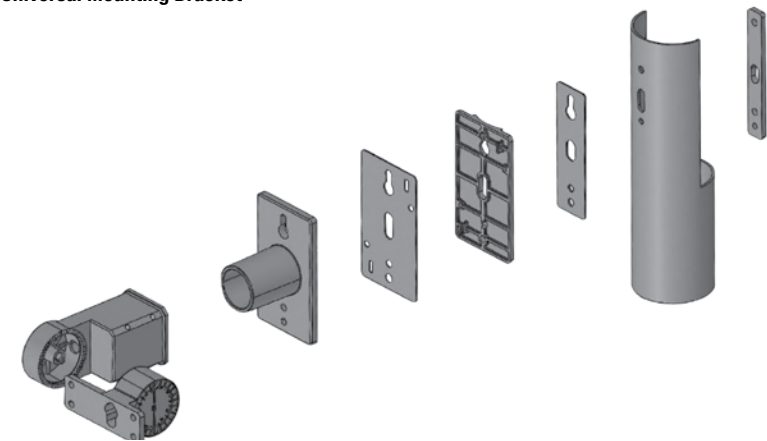

Fixed Mounting Bracket

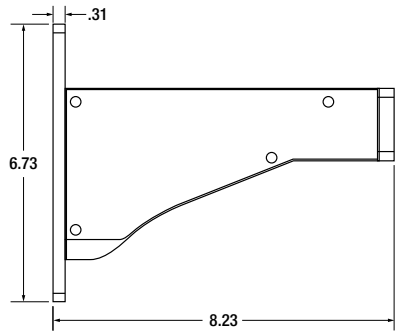

0° Angle

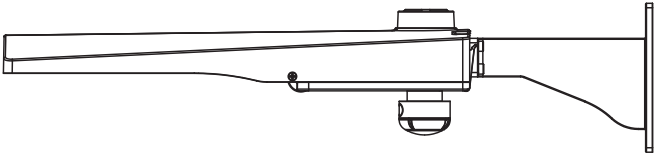


Dimensions in inches

The Universal Mounting Bracket is included with all units and the Fixed Mounting Bracket is included with all 3000K units.


Accessories

Item Number	Ordering Abbreviation	Description
61393	AREAFLDXA/NEMAPHOTOCELL/UNV	NEMA locking photocell, 120-277V, 3-pin
61395	AREAFLDXA/NEMAPHOTOCELL/480	NEMA locking photocell, 480V, 3-pin
63031	SENSOR1A/ODPIRZ10BLE/WH	Bluetooth Sensor, White Finish
63032	SENSOR1A/ODPIRZ10BLE/BZ	Bluetooth Sensor, Bronze Finish
63033	CONTROL1A/OD12VZ10BLE/WH	Bluetooth Controller, White Finish
63164	AREAFLD4A/SMALLSHIELD	Small Shield
63165	AREAFLD4A/LARGESHIELD	Large Shield
63166	AREAFLD4A/BIRDSPIKE	Bird Spike

Small Shield

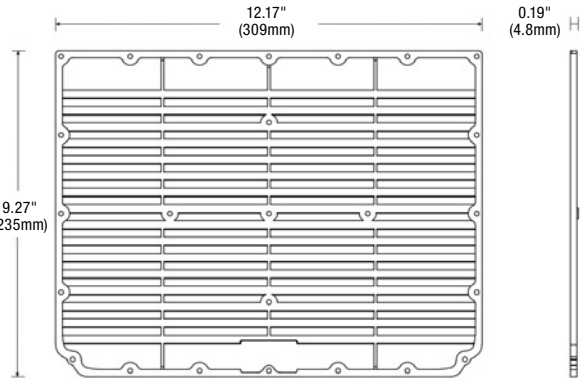

Large Shield

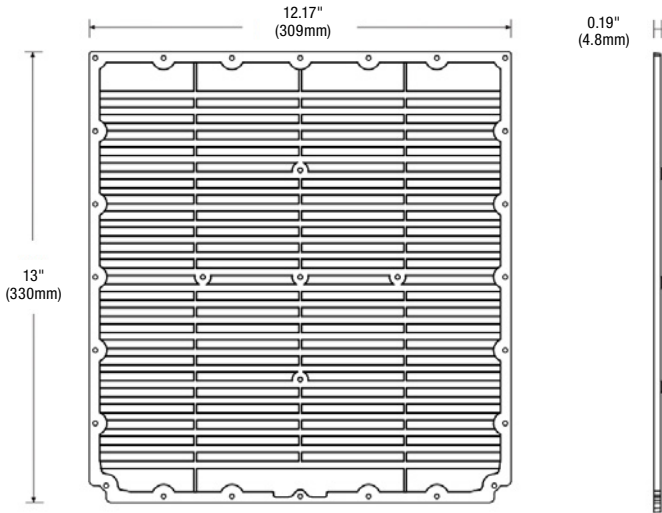

Poles
Click or scan QR tag for Poles information.

Benefits and Features

- The LEDVANCE LINK Bluetooth® Mesh Low Voltage components use Bluetooth technology for easy and secure wireless communication
- Enables regular LEDVANCE luminaires to become Bluetooth enabled and allows for luminaires to be turned on/off and dimmed (manual or auto)
- Components can be used up to 40ft height
- Control using either the LEDVANCE LINK smart phone app or the wireless wall switch

Sensor Information

Input voltage: 12V_{DC}

Bluetooth transmit line distance: 100ft

Detection range: 48-80ft

Rated current: 55mA

Dimming: 0-10V

Infrared sensor: Omni-directional quad element pyroelectric


Mounting height: 15-40ft

Detectable speed: 1~10 ft/sec (0.3~3 m/sec)


Operating temperature: -40°F~131°F (-40°C~55°C)

Operating humidity: IP66


Protocol: Bluetooth Mesh BLE Proprietary

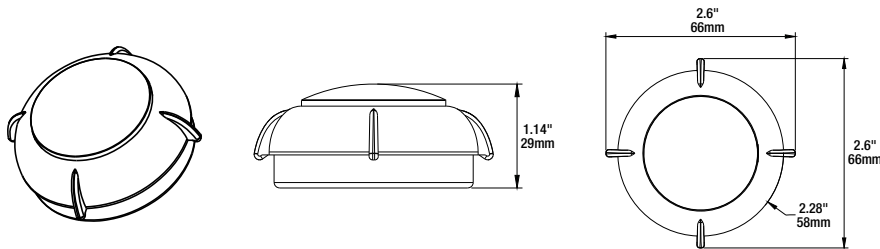

Zhaga Bluetooth Sensor Side View

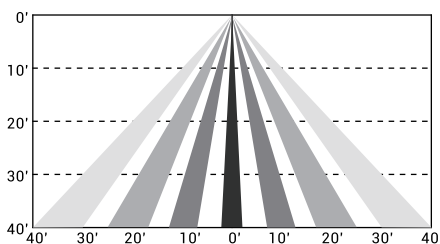

Zhaga Bluetooth Sensor Coverage Top View



Click or scan QR code for more information on LEDVANCE LINK




COMMISSIONING
GUIDE




Photometric Information

100W


AREAFLD4AS100UNVD840FR-25FT

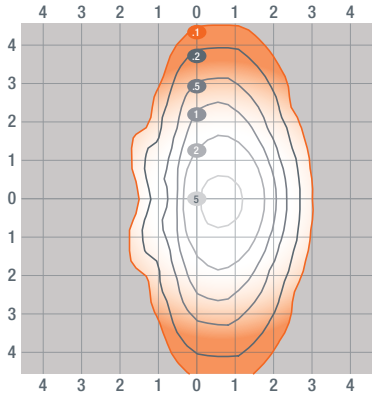


AREAFLD4AS100UNVD840T2-25FT

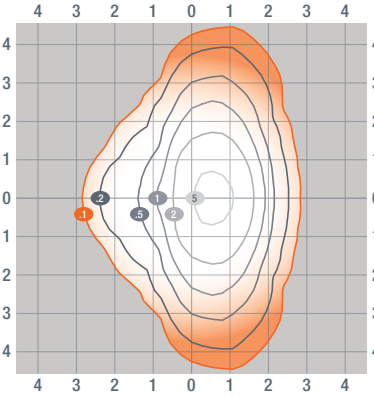


AREAFLD4AS100UNVD840T3-25FT

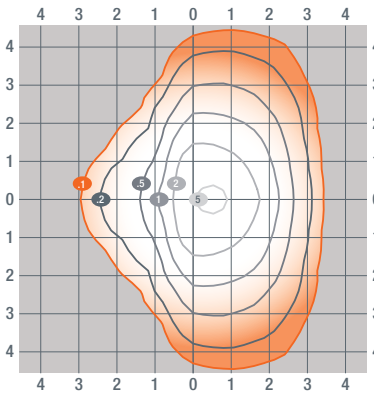

AREAFLD4AS100UNVD840T4-25FT

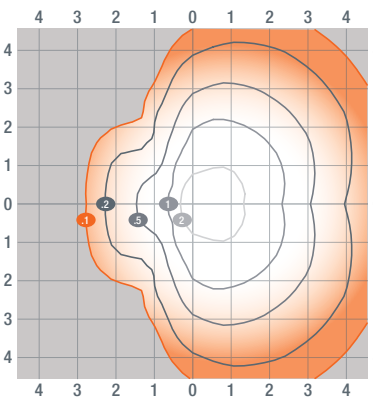


AREAFLD4AS100UNVD840T5-25FT

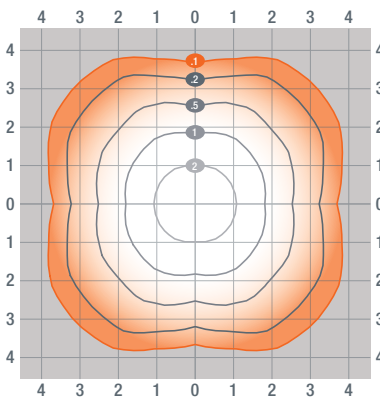


190W


AREAFLD4AS190UNV840T2-30FT

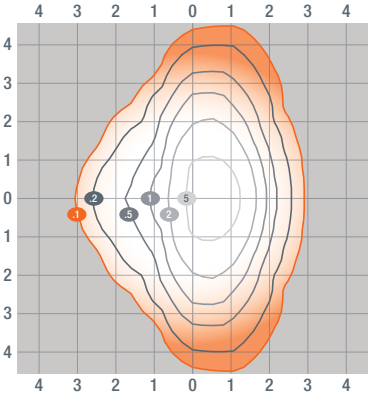


AREAFLD4AS190UNVD840T3-30FT

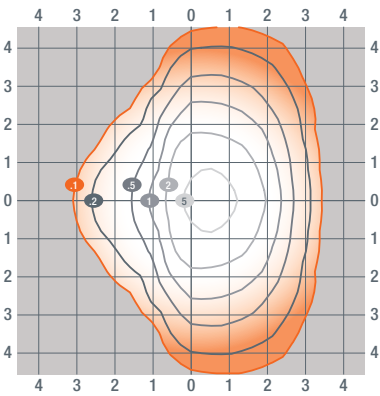

AREAFLD4AS190UNVD840T4-30FT

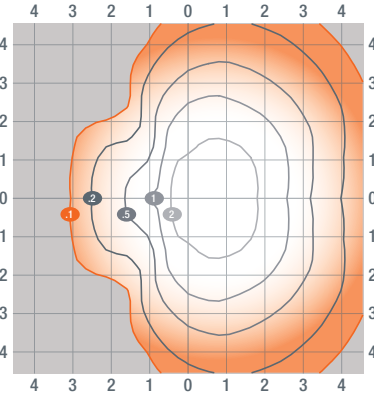


AREAFLD4AS190UNVD840T5-30FT

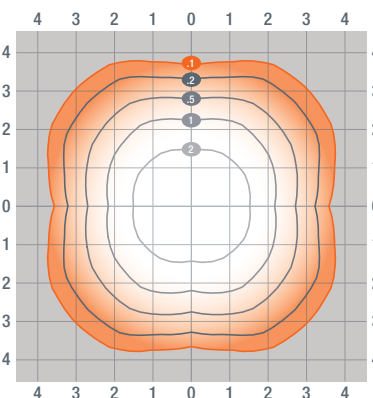


Photometric Information (continued)

290W


AREAFLD4AS290UNVD840T2-35FT

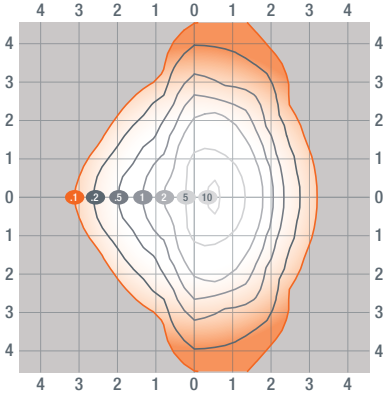


AREAFLD4AS290UNVD840T3-35FT

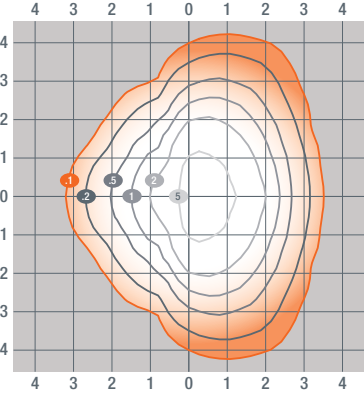

AREAFLD4AS290UNVD840T4-35FT

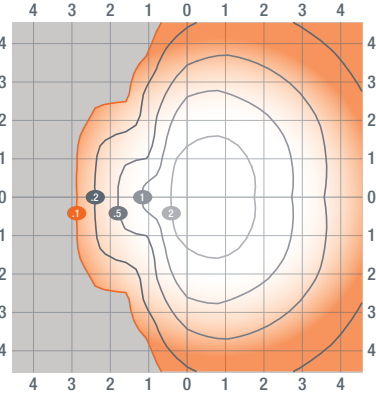

AREAFLDS290UNVD840T5-35FT

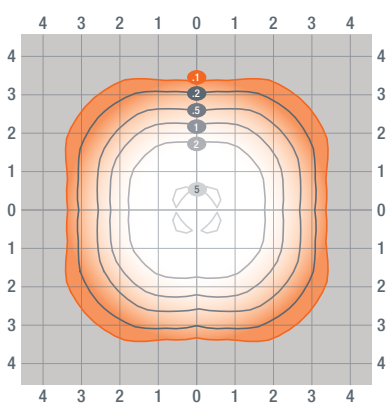

LEDVANCE LLC
181 Ballardvale Street, Suite 203
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

LEDVANCE is a registered trademark. All other trademarks are those of their respective owners. Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA

© 2023 LEDVANCE LLC

