

Ordering Guide

AREAFLD	3A	/	XX0	UNV	D	7	X0	/	TX	/	BZ
Product Name	Generation		Wattage	Voltage	Dimming	CRI	Color Temp		Distribution		Color / Finish
AREAFLD =	3A = Generation 3A		150 = 150 Watts	UNV = 120-277V	D = 0-10V	CRI = >70	40 = 4000K		T3 = Type III		BZ = Bronze
Area Floodlight Luminaire			300 = 300 Watts				50 = 5000K		T5 = Type V		

Ordering Information


Item Number	Ordering Abbreviation	Wattage (W)	Input Voltage (V)	Dimming	CRI	Color Temperature (CCT)	Distribution	Total Fixture Lumens	LPW*	DLC	BUG Rating
61316	AREAFLD3A/150UNVD740/T3/BZ	150	120-277V	0-10V	> 70	4000K	III	20,000	135	Prm	B3-U0-G3
61317	AREAFLD3A/150UNVD740/T5/BZ	150	120-277V	0-10V	> 70	4000K	V	20,000	135	Prm	B3-U0-G3
61318	AREAFLD3A/150UNVD750/T3/BZ	150	120-277V	0-10V	> 70	5000K	III	20,000	135	Prm	B3-U0-G3
61319	AREAFLD3A/150UNVD750/T5/BZ	150	120-277V	0-10V	> 70	5000K	V	20,000	135	Prm	B3-U0-G3
61320	AREAFLD3A/300UNVD740/T3/BZ	300	120-277V	0-10V	> 70	4000K	III	40,000	135	Prm	B4-U0-G5
61321	AREAFLD3A/300UNVD740/T5/BZ	300	120-277V	0-10V	> 70	4000K	V	40,000	135	Prm	B4-U0-G5
61322	AREAFLD3A/300UNVD750/T3/BZ	300	120-277V	0-10V	> 70	5000K	III	40,000	135	Prm	B4-U0-G5
61323	AREAFLD3A/300UNVD750/T5/BZ	300	120-277V	0-10V	> 70	5000K	V	40,000	135	Prm	B4-U0-G5

*Lumens and LPW are based on 5000K CCT.


Photometric Information

Mounted at 15' at a 15° angle

150W Type III Distribution

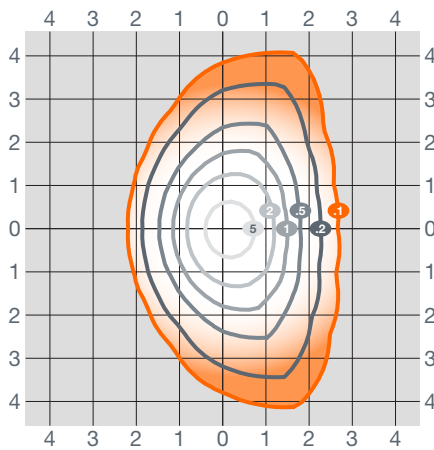


300W Type III Distribution

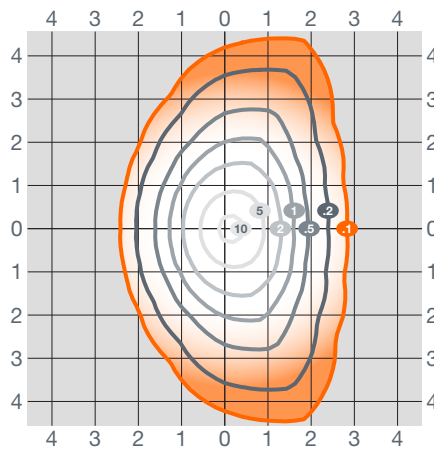


Physical Information

150W

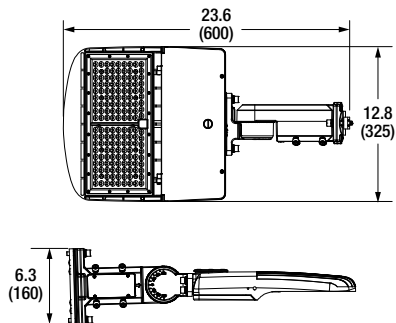

300W

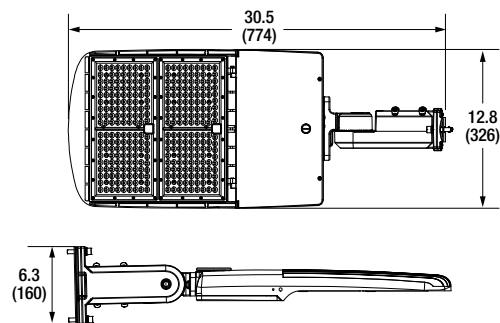

Dimensions in inches (mm)

Accessories

NEMA Photocontrols

61393	AREAFLDXA/NEMAPHOTOCELL/UNV	NEMA locking photocell, 120-277V
-------	-----------------------------	----------------------------------