


4

5

DWG NO. 1000084 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

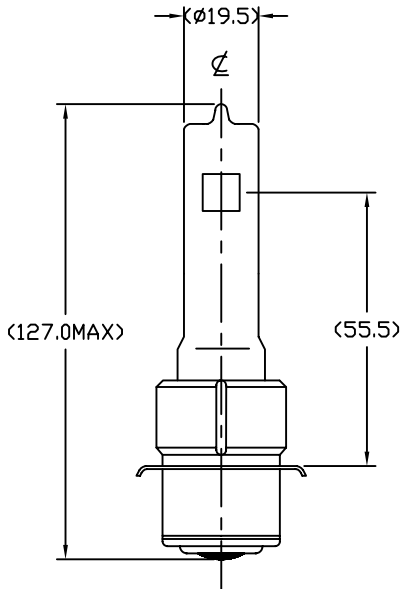

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM.
 - 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	500 W
COLOR TEMP.	3200 K
TOTAL LUMEN	13000 Lm
BASE TYPE	P28S
AVERAGE LIFE	100 HRS
FILAMENT TYPE	C-13D
BURN POSITION	BD/Hor

APPLICATION	
NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630			
	APPROVALS					DATE
	DRAWN	R.AMPARO	08/31/99	TITLE BTM JCS120V-500WCP28		
	CHKD	D.GILCZYNSKI	08/31/99			
	ENGR					
	MFG					
	MATERIAL COMPOSITE	QUAL		SIZE	CODE IDENT NO.	DWG NO.
FINISH	DSGN ACTVY		B	BTM	1000084	
	GOVT ACTVY		SCALE	NONE	WEIGHT	SHEET 1 OF 1

4

3

2

1

CAD