

SYLVANIA Luminaires

Bullet Floodlight



Product Features


- Lightweight, compact design
- Medium flood distribution
- Easy installation and adjustment with integrated knuckle
- 90% energy savings over traditional light sources

Wattage Comparison Chart

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
50W Halogen	50	5	90%
75W Halogen	75	15	80%
90W Halogen	90	15	83%
35W HPS	42	15	64%
35W HPS	42	20	52%
50W HPS	62	20	68%
90W Halogen	90	20	78%
150W Halogen	150	20	87%

Catalog #	Type
Project	
Notes	
Date	
Prepared by	

Dimensions

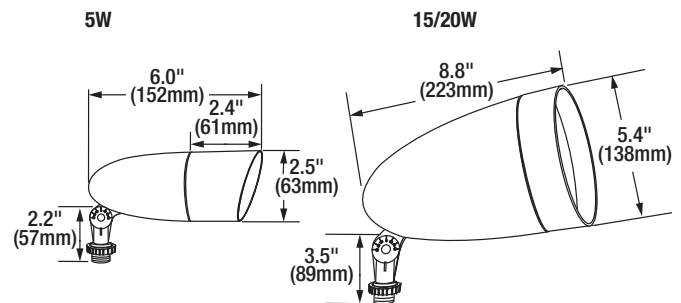

Specifications

Weight: 5W: 2.2lbs (1.0kg) 15/20W: 4.3lbs (2.0kg)

Construction: Die Cast aluminum housing with powder coat paint. The standard color is bronze.

LED System: LED system with a life rating of >150,000 hours at L₇₀ @ 25°C. Luminaire efficacy up to 110 LPW.

Electrical: Offered in 5, 15 or 20 watts, the luminaire is designed to operate through the 120-277 V_{AC} universal voltage range. The 5W LED driver has a 2kV, the 15-20W driver has 4kV inherent surge suppression, and is a constant current device. The power factor is ≥90% and THD is ≤20%.

Color Characteristics: CRI >70; CCT of 3000K, 4000K or 5000K.

Optics: UV resistant tempered glass lens.

Operating Temperature: -40°F to +104°F (-40°C to +40°C).

Listings: cULus listed to UL1598 rated for wet locations.

Warranty: Standard 5-year luminaire warranty (LEDLUM001).

Note: Specifications subject to change without notice. IES files available online.




*See page 2 for DLC listings

Ordering Guide


Item Number:

BULLTFL	1A	/	XXX	XXX	7	XX	/	MF	/	BZ
Product Name	Generation		Wattage (UNV)	Voltage	CRI	Color Temp (CCT)		Distribution		Color Finish
BULLTFL	1A		005 = 5 Watts 015 = 15 Watts 020 = 20 Watts	UNV = 120-277V	7 = >70	30 = 3000K 40 = 4000K 50 = 5000K		MF = Medium Flood		BZ = Bronze


5W BULLTFL1A/005UNV740MFBZ
10' setback with 30° tilt

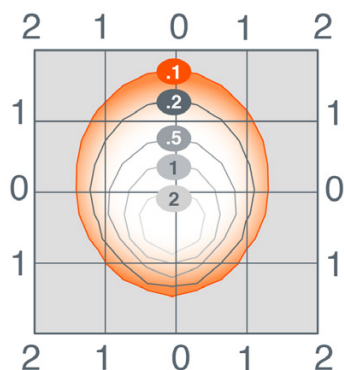

150W BULLTFL1A/15UNV740MFBZ
10' setback with 30° tilt

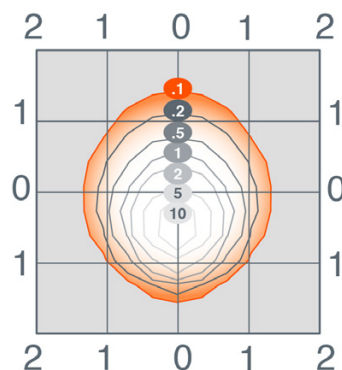

20W BULLTFL1A/20UNV740MFBZ
10' setback with 30° tilt

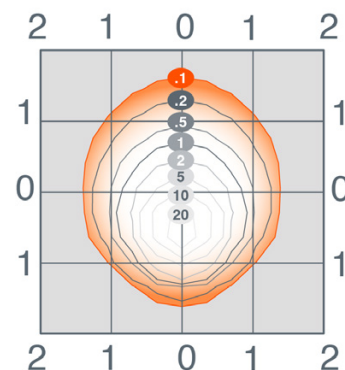

Item Number	Ordering Abbreviation	Power (W)	Input Voltage	CRI	Color Temp (CCT)	Distribution	Lumens	LPW	DLC
60255	BULLTFL1A005UNV730/MF/BZ	5	120-277	>70	3000K	5 x 5	550	100	Premium
60179	BULLTFL1A/005UNV740/MF/BZ	5	120-277	>70	4000K	5 x 5	550	110	Premium
60180	BULLTFL1A/005UNV750/MF/BZ	5	120-277	>70	5000K	5 x 5	550	110	Premium
60181	BULLTFL1A/015UNV740/MF/BZ	15	120-277	>70	4000K	4 x 4	1250	90	Standard
60182	BULLTFL1A/015UNV750/MF/BZ	15	120-277	>70	5000K	4 x 4	1250	90	Standard
60254	BULLTFL1A/015UNV730/MF/BZ	15	120-277	>70	3000K	4 x 4	1250	90	Standard
60183	BULLTFL1A/020UNV740/MF/BZ	20	120-277	>70	4000K	4 x 4	2000	100	Standard
60184	BULLTFL1A/020UNV750/MF/BZ	20	120-277	>70	5000K	4 x 4	2000	100	Standard

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.

