


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

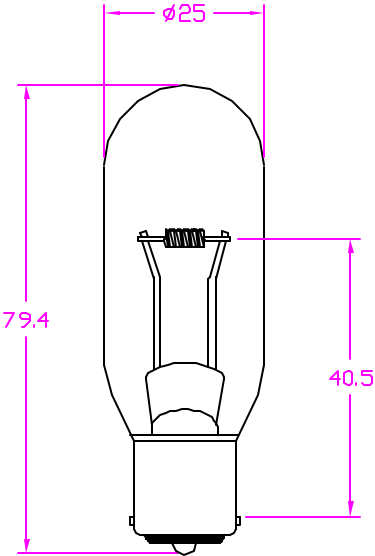

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS			
RATED VOLTAGE	10 V		
AMPERAGE	5.0 A		
BULB FINISH	CLEAR		
TOTAL LUMENS	800 Lm		
AVERAGE LIFE	100 HRS		
BASE TYPE	BA15s		
FILAMENT TYPE	C-6	NEXT ASSY	USED ON
BURNING POSITION	BD	APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630 BXR, INC10V-5.0A INCANDESCENT LAMP	
		APPROVALS	DATE		
		DRAWN R.AMPARO	05/25/01		
		CHKD J.COOPER	05/25/01		
		ENGR			
MATERIAL COMPOSITE		MFG		TITLE BXR, INC10V-5.0A INCANDESCENT LAMP	
		QUAL			
		DSGN ACTVY			
FINISH		GOVT ACTVY		SIZE B	CODE IDENT NO. BXR
				SCALE NONE	DWG NO. 1000103
				WEIGHT	SHEET 1 OF 1