

4


3

DWG NO. 3000207 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

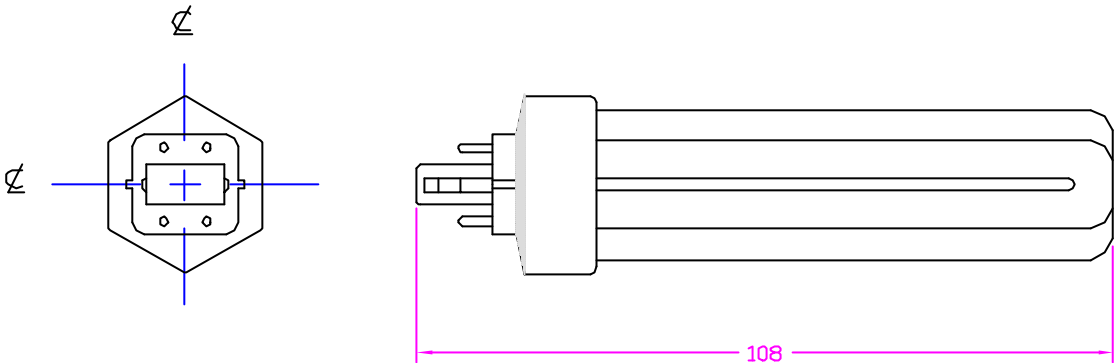

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 - 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	91 V
WATTAGE	13 W
CURRENT	0.175 A
COLOR TEMP	2700 K
CRI	82
LUMENS	900 Lm
ANSI SHAPE	T-4 TRIPPLE TUBE
BASE TYPE	CAP TYPE-GX24q-1
Ave. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	04/05/01	TITLE UFL-CF13TE/827 COMPACT FLUORESCENT	
		CHKD	J.COOPER	04/05/01		
		ENGR				
		MFG				
		QUAL				
		MATERIAL COMPOSITE		DSGN ACTVY		SIZE
FINISH		GOVT ACTVY		B		3000207
				SCALE	WEIGHT	SHEET
				NONE		1 OF 1

4

3

2

1

CAD