

4



3

DWG NO. 3000141 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

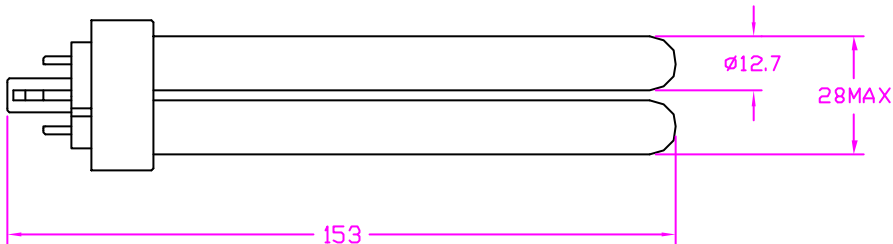

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 - 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	100 V
WATTAGE	18 W
CURRENT	0.220 A
COLOR TEMP	4100 K
CRI	82
LUMENS	1200 Lm
ANSI SHAPE	T-4 DOUBLE TUBE
BASE TYPE	CAP TYPE-G24d-2
AVE. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS		
LIST OF MATERIALS							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630			
		APPROVALS				DATE	
		DRAWN	R.AMPARO			04/05/01	
		CHKD	J.COOPER	04/05/01	TITLE UFL-CF18D/841 COMPACT FLUORESCENT		
		ENGR					
		MFG					
		MATERIAL		QUAL		SIZE	CODE IDENT NO.
COMPOSITE				B		3000141	
FINISH		DSGN ACTVY		SCALE	NONE	WEIGHT	SHEET
		GOVT ACTVY					1 OF 1

4

3

2

1

CAD