



6S6 CANDELABRA SCREW BASE SUPER FLUX LEDs

ORDERING INFORMATION:

<u>CSB123SF</u>	<u>R</u>	-	<u>24V</u>	-	<u>DP</u>
(A)	(B)		(C)		(D)

(A) MODEL

CSB123SF
 CSB144SF
 CSB188SF

(B) LED EMITTING COLOR & WAVELENGTH

R = ULTRA HI EFF. RED (623-630nm)
 Y = ULTRA YELLOW (590-595nm)
 O = ULTRA ORANGE (612-620nm)
 G = ULTRA PURE GREEN (520-530nm)
 B = ULTRA BLUE (465-475nm)
 BG = BLUISH GREEN (498-508nm)
 W = FLUORESCENT "WHITE" (NO nm VALUE)
 SW = SOFT WHITE (NO nm VALUE)

(C) STANDARD DC & AC OPERATING VOLTAGES

6V, 12V, 14V, 24V, 28V, 36V, 48V, 60V & 120V

NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES

(D) CENTER CONTACT POLARITY

DP = DUAL POLARITY

DIRECT INCANDESCENT LAMP REPLACEMENT

3S6 & 6S6, ETC...


HOUSING MAT'L. UL94-VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE


TOP VIEW



MODEL: CSB123SF

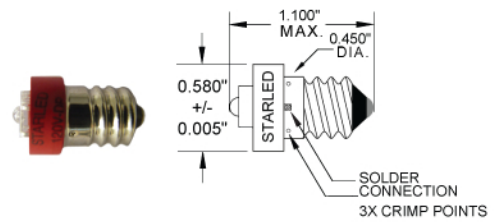

MODEL: CSB144SF

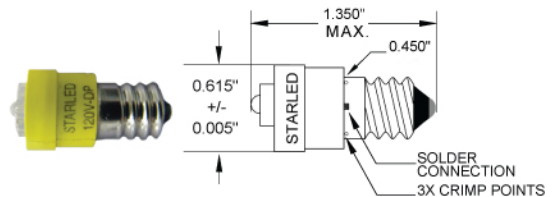

MODEL: CSB188SF

