


4

3

DWG NO. 1000173 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

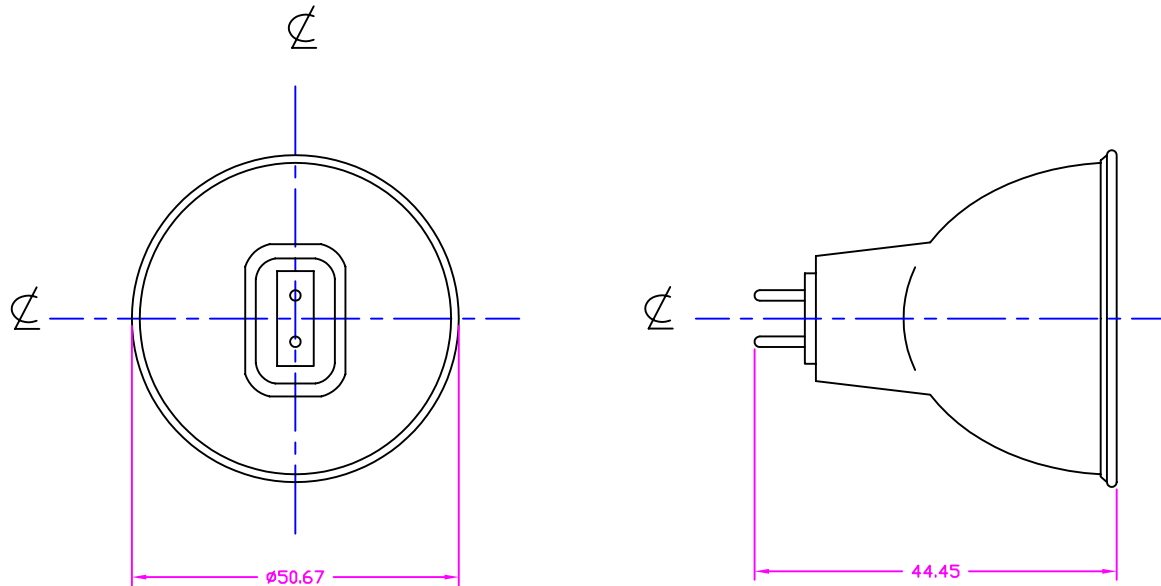

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM.
 - 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	20 V
WATTAGE	150 W
COLOR TEMP	3150 K
AVERAGE LIFE	500 HRS
BASE TYPE	GX5.3
REFLECTOR TYPE	Faceted
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO			08/24/99
		CHKD	D.GILCZYNSKI			08/24/99
		ENGR				
MATERIAL COMPOSITE		MFG		TITLE DDL JCR20V-150W		
		QUAL				
		DSGN ACTVY				
FINISH		GOVT ACTVY		SIZE	CODE IDENT NO.	DWG NO.
				B	DDL	1000173
				SCALE	NONE	WEIGHT
						1 OF 1

NEXT ASSY	USED ON

APPLICATION