


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

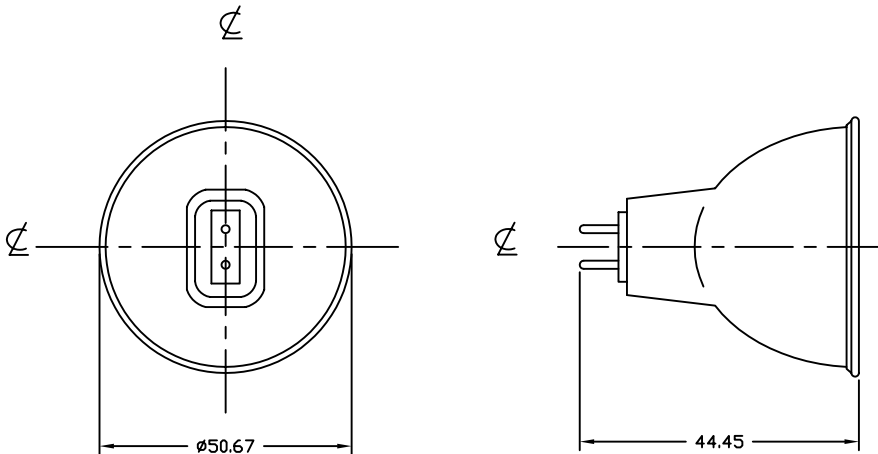

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM.
 - 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	13.8 V
WATTAGE	85 W
COLOR TEMP	3150 K
AVERAGE LIFE	1000 HRS
BASE TYPE	GX5.3
REFLECTOR TYPE	Specular
FILAMENT TYPE	C-8
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO		
			CHKD D.GILCZYNSKI		
MATERIAL COMPOSITE			ENGR		
			MFG		
			QUAL		
			DSGN ACTVY		
			GOVT ACTVY		
FINISH			TITLE		
			USHIO AMERICA, INC.		
			5440 Cerritos Avenue Cypress, CA 90630		
			DED JCR13.8V-85W		
			SIZE B		
			CODE IDENT NO. DED		
			DWG NO. 1000180		
			SCALE NONE		
			WEIGHT		
			SHEET 1 OF 1		