
Product datasheet

DULUX F 18 W/840 2G10

OSRAM DULUX F | Flat CFLni, 2 tubes, with 4-pin base for ECG/CCG operation

- Offices, public buildings Shops Supermarkets and department stores Hotels, restaurants Industry



-
- Very economical Good quality of light Excellent luminous efficiency Extremely low profile Long service life



Product datasheet

Technical data

Photometrical data

Color rendering index Ra	80...89
--------------------------	---------

Lifespan

Nominal lamp life time	13000 h
------------------------	---------

Additional product data

Appropriate disposal acc. to WEEE	Yes
-----------------------------------	-----


Certificates & standards

Energy efficiency class	G
-------------------------	---

Environmental information

Date of Declaration	10-11-2021
Primary Article Identifier	4050300333526
Candidate List Substance 1	No declarable substances contained
CAS No. of substance 1	No CAS
Declaration No. in SCIP database	No declarable substances contained


Light Distribution

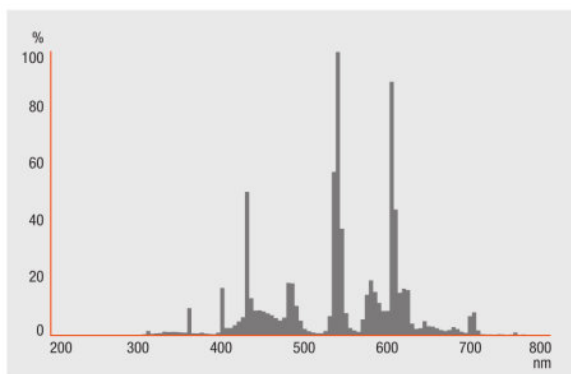


FL_840

Equipment / Accessories

- Suitable for operation on electronic and conventional control gear




SERIES CONNECTION WITH QUICKTRONIC




SINGLE LAMP WITH QUICKTRONIC

Product datasheet

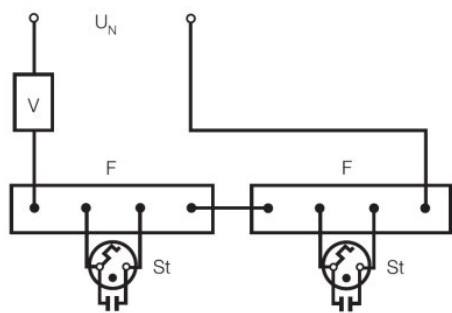

SERIES CONNECTION TO 230V ONLY WITH STARTER ST151



SINGLE LAMP STARTER ST 111 OR ST 171

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300333526	DULUX F 18 W/840 2G10	Shipping carton box 10 Pieces Folding carton box	280 mm x 105 mm x 150 mm	4.41 dm ³	1066.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on QUICKTRONIC electronic control gear go to
▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

DULUX F 18 W/840 2G10

OSRAM DULUX F | Flat CFLni, 2 tubes, with 4-pin base for ECG/CCG operation

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Power factor λ [PIM]	Luminous flux at 35 °C
DULUX F 18 W/840 2G10	QT-ECO 1x18-24/220-240 S	4050300638560	0.13 A	18.00 W	0.60 c	1000 lm
	QTi DALI 1x18 DIM	4050300870403	0.08 A	18.00 W	0.97	1100 lm
	QTi DALI 2x18 DIM	4050300870526	0.16 A	37.00 W	0.97	1100 lm
	QTi DALI 3x18 DIM	4008321069979	0.24 A	53.60 W	0.98	1100 lm
	QTi DALI 4x18 DIM	4008321070050	0.31 A	69.30 W	0.98	1100 lm
	QTP-M 1x26-42	4008321329134	0.09 A	19.00 W	0.88 c	1050 lm
	QTP-M 2x26-32	4008321329158	0.16 A	36.00 W	0.95	1050 lm
	QTP-OPTIMAL 1x18-40	4008321873743	0.08 A	18.00 W	0.90 c	1050 lm
	QTP-OPTIMAL 2x18-40	4008321873767	0.16 A	33.00 W	0.95	1050 lm

Product name	Product name ECG	EAN	Number of lighting outlets	EEI – Energy Label
DULUX F 18 W/840 2G10	QT-ECO 1x18-24/220-240 S	4050300638560	1	A2
	QTi DALI 1x18 DIM	4050300870403	1	
	QTi DALI 2x18 DIM	4050300870526	2	
	QTi DALI 3x18 DIM	4008321069979	3	
	QTi DALI 4x18 DIM	4008321070050	4	
	QTP-M 1x26-42	4008321329134	1	

Product datasheet

Product name	Product name ECG	EAN	Number of lighting outlets	EEI – Energy Label
	QTP-M 2x26-32	4008321329158	2	
	QTP-OPTIMAL 1x18-40	4008321873743	1	
	QTP-OPTIMAL 2x18-40	4008321873767	2	