


Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacor.com

Customer Name:
Project Name:
Fixture Type:



41667 - DWE-Q650PAR36/1

GE Quartzline® Showbiz® PAR36 - Stage & Studio; Medium Flood

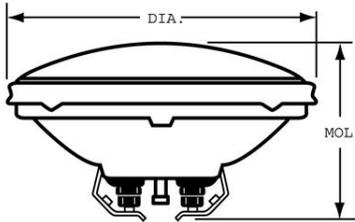

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Wattage	650
Voltage	120/650
Rated Life	100 hrs
Primary Application	Stage & Studio; Medium Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	24000 /24000 /24000
Beam Spread - Horizontal	40.0 - 50.0 °
Beam Spread - Vertical	30.0 - 50.0 °
Center Beam Candlepower (CBCP)	24000
Color Temperature	3200 K
Color Rendering Index (CRI)	63
Max. Beam Candlepower (MBCP)	24000
Nominal Initial Lumens per Watt	36

ELECTRICAL CHARACTERISTICS

Burn Position	Horizontal ±15°
---------------	-----------------

DIMENSIONS

Maximum Overall Length (MOL)	2.7500 in(69.8 mm)
Bulb Diameter (DIA)	4.500 in(114.3 mm)
Bulb Diameter (DIA) (MAX)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	41667
Description	DWE-Q650PAR36/1
ANSI Code	DWE
Standard Package	Case
Standard Package GTIN	10043168416679
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168416672

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
 - Turn power off before installing lamp.
- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.
 - Dispose of lamp in a closed container.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Use in enclosed fixture rated for this product.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not exceed 110% of rated voltage.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.