


4

3

DWG NO. 1000236 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

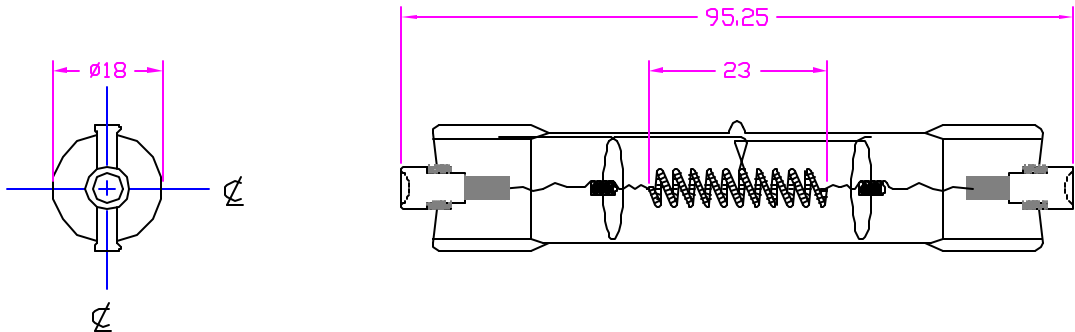

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	1000 W
COLOR TEMP	3200 K
LUMENS	28000 Lm
AVERAGE LIFE	150 HRS
FILAMENT TYPE	CD-B
BASE TYPE	R7s-18
BULB FINISH	CLEAR

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC.	
		APPROVALS		DATE	
		DRAWN R.AMPARO		04/17/01	
		CHKD		04/17/01	
		ENGR			
MATERIAL COMPOSITE		QUAL		TITLE	
		DSGN ACTVY		DXW JPD120V-1000WC5 DOUBLE ENDED HALOGEN LAMP	
		GOVT ACTVY		SIZE B	
FINISH		SCALE		CODE IDENT NO. DXW	
		WEIGHT		DWG NO. 1000236	
APPLICATION		SHEET		1 OF 1	

4

3

2

1

CAD