


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

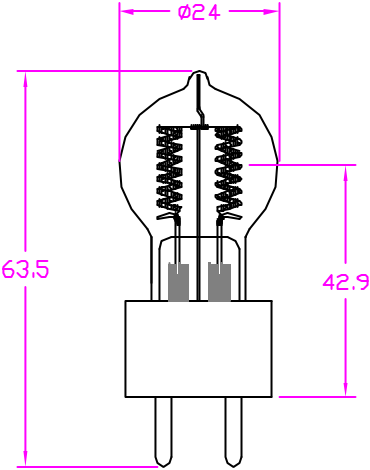

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO		
			CHKD		
MATERIAL COMPOSITE			04/17/01		
			ENGR		
			MFG		
			QUAL		
			DSGN ACTVY		
FINISH			GOVT ACTVY		
			TITLE		
			USHIO AMERICA, INC.		
			5440 Cerritos Ave. Cypress, CA 90630		
			DYJ JCD230V-650WSP HALOGEN LAMP		
			SIZE	CODE IDENT NO.	DWG NO.
			B	DYJ	1000247
			SCALE	WEIGHT	SHEET
			NONE		1 OF 1

CHARACTERISTICS	
VOLTAGE	230 V
WATTAGE	650 W
LUMEN OUTPUT	20000 Lm
COLOR TEMP.	3400 K
BASE TYPE	G5.3
AVERAGE LIFE	20 HRS
FILAMENT TYPE	2CC-8
BURN POSITION	BD/Hor

NEXT ASSY	USED ON
APPLICATION	