


DWG NO. 1000250 SH 1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

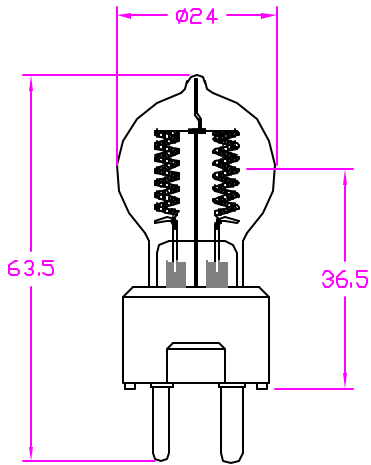

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	240 V
WATTAGE	650 W
LUMEN OUTPUT	16500 Lm
COLOR TEMP.	3200 K
BASE TYPE	GY9.5
AVERAGE LIFE	50 HRS
FILAMENT TYPE	2CC-8
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630			
	APPROVALS					DATE
	DRAWN	R.AMPARO	04/17/01	TITLE DYR/240V JCD240V-650WC2 HALOGEN LAMP		
	CHKD		04/17/01			
	ENGR					
	MF8					
	QUAL					
MATERIAL COMPOSITE	DSGN ACTVY		SIZE	CODE IDENT NO.	DWG NO.	
FINISH	GOVT ACTVY		B	DYR	1000250	
			SCALE	WEIGHT	SHEET	
			NONE		1 OF 1	

NEXT ASSY	USED ON
	APPLICATION