

4


3

1

DWG NO. 1000503 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

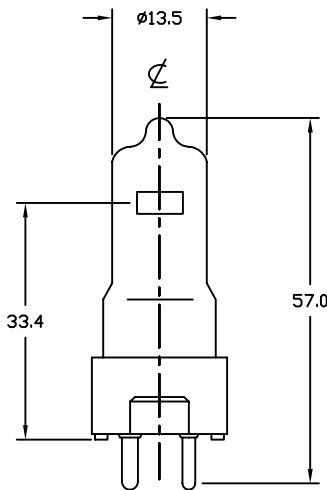

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP. SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	24 V
WATTAGE	150 W
TOTAL LUMEN	4450 Lm
COLOR TEMP.	3400 K
BASE TYPE	GY9.5
AVERAGE LIFE	50 HRS
FILAMENT TYPE	CBar-6
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	09/27/99	TITLE FDS/DZE JC24V-150W	
		CHKD	D.GILCZYNSKI	09/27/99		
		ENGR				
		MFG				
		QUAL				
		MATERIAL		SIZE		CODE IDENT NO.
COMPOSITE		B		FDS	1000503	
FINISH		DSGN ACTVY				
		GOVT ACTVY		SCALE	WEIGHT	SHEET
				NONE		1 OF 1

NEXT ASSY	USED ON
	APPLICATION