


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

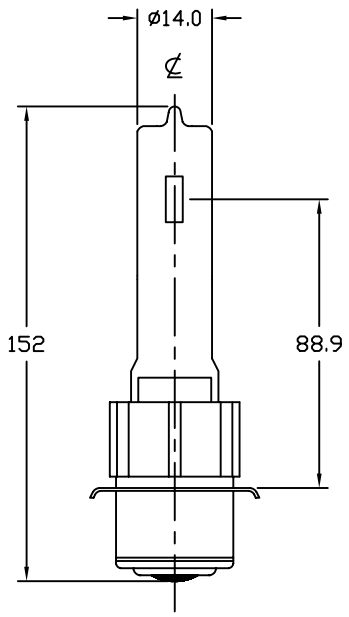

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	500 W
COLOR TEMP.	3000 K
TOTAL LUMEN	10450 Lm
BASE TYPE	P28S
AVERAGE LIFE	2000 HRS
FILAMENT TYPE	CC-8
BURN POSITION	Any

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS DATE		
			DRAWN	R.AMPARO	09/01/99
			CHKD	D.GILCZYNSKI	09/01/99
			ENGR		
			MFG		
			QUAL		
			DSGN ACTVY		
			GOVT ACTVY		
MATERIAL			USHIO AMERICA, INC.		
COMPOSITE			10550 Camden Dr. Cypress, CA 90630		
FINISH			TITLE		
			EGE		
			JCV120V-500WB		
			SIZE	CODE IDENT NO.	DWG NO.
			B	EGE	1000274
			SCALE	WEIGHT	SHEET
			NONE		1 OF 1

NEXT ASSY	USED ON
	APPLICATION