


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

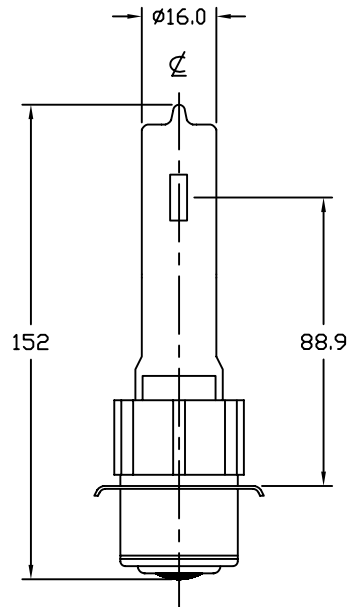

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	750 W
COLOR TEMP.	3200 K
TOTAL LUMEN	20400 Lm
BASE TYPE	P28S
AVERAGE LIFE	500 HRS
FILAMENT TYPE	CC-8
BURN POSITION	Any

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS			
LIST OF MATERIALS								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630					
	APPROVALS					DATE		
	DRAWN	R.AMPARO				08/31/99		
	CHKD	D.GILCZYNSKI				08/31/99		
	ENGR		TITLE EGF JCV120V-750WC					
	MFG							
	QUAL							
	DSGN ACTVY							
	GOVT ACTVY		SIZE B					
	MATERIAL COMPOSITE					CODE IDENT NO. EGF		DWG NO. 1000275
FINISH		SCALE NONE				WEIGHT	SHEET 1 OF 1	

NEXT ASSY	USED ON
APPLICATION	