


DWG NO. 1000286 SH 1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

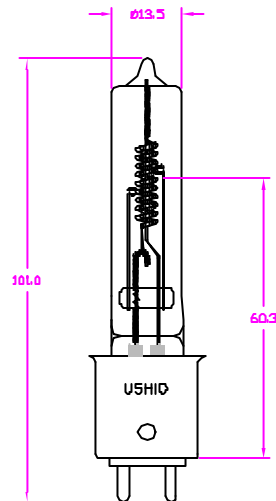

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS

VOLTAGE	120 V
WATTAGE	500 W
TOTAL LUMEN	13000 Lm
COLOR TEMP.	3200 K
AVERAGE LIFE	300 HRS
BASE TYPE	G8.5
FILAMENT TYPE	CC-B
BURN POSITION	ANY

NEXT ASSY	USED ON

APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± .XX ± .XXX ± ANGLES DRILLED HOLES PER AND 10367 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO		
			CHKD J.COOPER		
MATERIAL			ENGR		
COMPOSITE			MFG		
QUAL			OSDN ACTVY		
FINISH			CDVT ACTVY		
			SCALE NONE		
			WEIGHT		
			SHEET 1 OF 1		

USHIO AMERICA, INC.

5440 Carriloe Ave. Cypress, CA 90830

TITLE

EHC/EHB, JCV120V-500WCM
HALOGEN LAMP

SIZE

B

CODE IDENT NO.

EHC

DWG NO.

1000286

1 OF 1