


ELCU-200 Emergency Lighting Control Unit

Installation Instructions

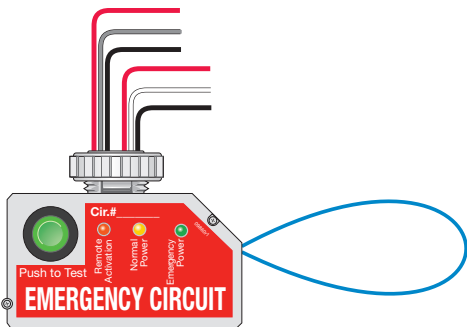

SPECIFICATIONS


Voltages.....	120/277VAC 50/60Hz
Max Load Requirements	
Ballast.....	20A @120/277VAC
Incandescent.....	10A @120VAC
Motor.....	1HP @120VAC
Remote Activation.....	24VDC sourced, dry contact closure
Integral Control.....	Push-to-Test button on unit
Conformance.....	UL924, NEC, OSHA, NFPA life safety codes
Environment.....	32°-122°F (0°-50°C) Ambient
Dimensions.....	3.0"L x 2.16"H x 1.6"W
UL 2043 Plenum Rated	

WattStopper®

Santa Clara, CA 95050

WIRING

Standard wiring for switched control of emergency lighting along with normal lighting

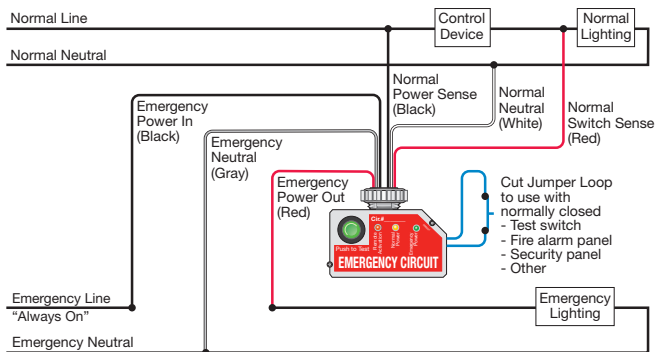

Alternate wiring for dimmer bypass on an emergency circuit

