


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

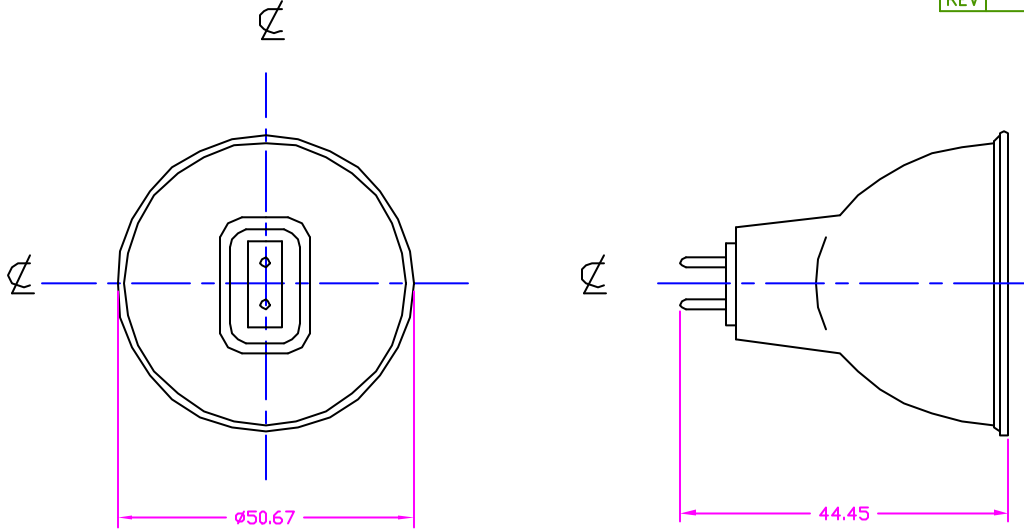

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 - 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	21 V
WATTAGE	150 W
COLOR TEMP	3400 K
AVERAGE LIFE	40 HRS
BASE TYPE	GX5.3
REFLECTOR TYPE	Stippled
FILAMENT TYPE	CC-6
BURN POSITION	Hor

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		DATE
			DRAWN	R.AMPARO	08/24/99
			CHKD	D.GILCZYNSKI	08/24/99
			ENGR		
MATERIAL COMPOSITE			QUAL		
			DSGN ACTVY		
FINISH			GOVT ACTVY		
			SIZE	B	
			CODE IDENT NO.	ELD	
			DWG NO.	1000319	
			SCALE	NONE	
			WEIGHT		
			SHEET	1 OF 1	

USHIO AMERICA, INC.
10550 Camden Dr. Cypress, CA 90630

TITLE
ELD/EJN, JCR21V-150W
HALOGEN LAMP