


4

3

DWG NO. 1000327 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

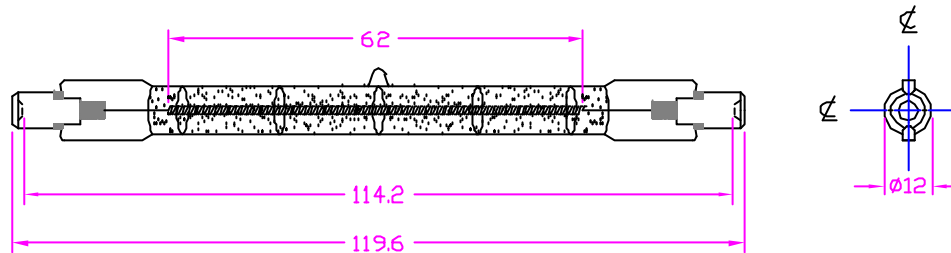

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
RATED VOLTAGE	120 V
STARTING VOLTAGE	750 W
TOTAL LUMEN	19500 Lm
COLOR TEMP	3200 K
AVERAGE LIFE	400 HRS
BASE TYPE	R7s-12
BULB FINISH	FRDSTED
FILAMENT TYPE	C-8
BURNING POSITION	Hor ±4°

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Ave. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	05/07/01	TITLE EMD, J120V-750WCF DOUBLE ENDED HALOGEN LAMP	
		CHKD	J.COOPER	05/07/01		
		ENGR				
		MFG				
		MATERIAL		QUAL	SIZE	CODE IDENT NO.
COMPOSITE			B	EMD	1000327	
FINISH		DSGN ACTVY	SCALE	WEIGHT	SHEET	
		GOVT ACTVY	NONE		1 OF 1	

4

3

2

1

CAD