


4

3

DWG NO. 1000336 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

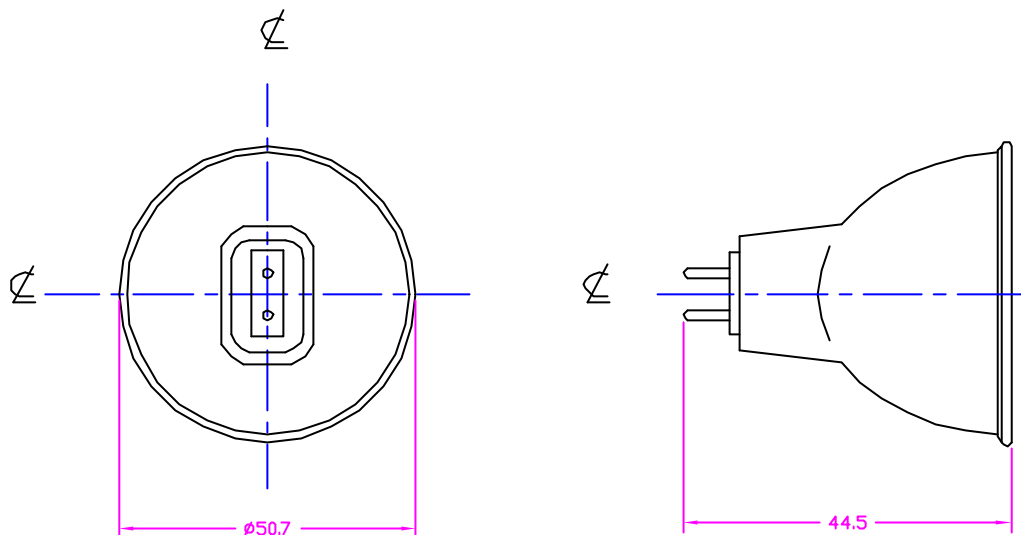

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	19 V
WATTAGE	80 W
COLOR TEMP	3200 K
WORKING DIST.	44.5
AVERAGE LIFE	200 HRS
BASE TYPE	GX5.3
REFLECTOR	DICHOIC
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	08/26/99	TITLE ENW/ENC, JCR19V-80W HALOGEN LAMP	
		CHKD	D.GILCZYNSKI	08/26/99		
		ENGR				
		MFG				
		QUAL				
MATERIAL COMPOSITE	DSGN ACTVY		SIZE B	CODE IDENT NO. ENW	DWG NO. 1000336	
FINISH	GOVT ACTVY		SCALE NONE	WEIGHT	SHEET 1 OF 1	

4

3

2

1

CAD