


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

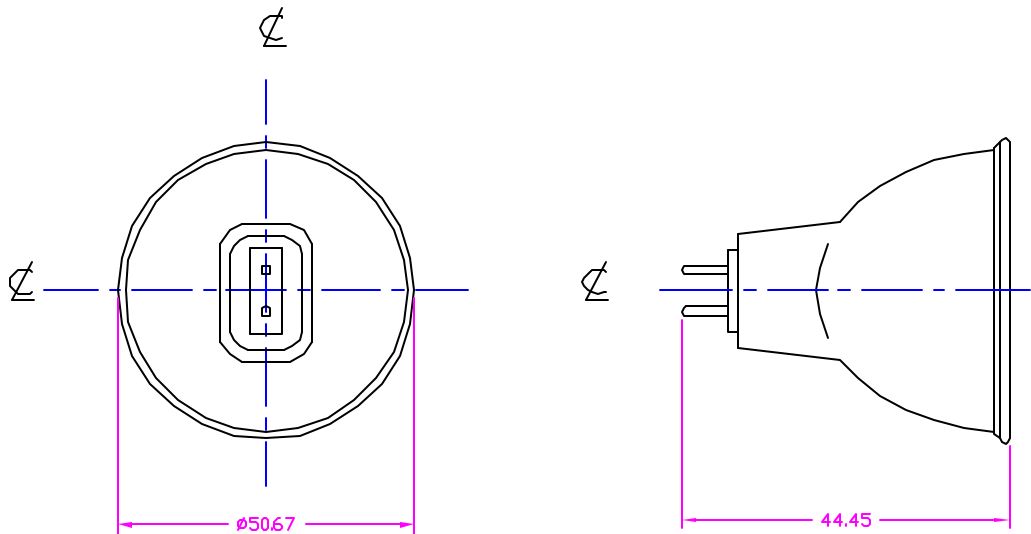

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 - 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
WD	165 MM
VOLTAGE	14.5 V
WATTAGE	90 W
COLOR TEMP	3150 K
AVERAGE LIFE	500 HRS
BASE TYPE	GX5.3
REFLECTOR TYPE	Stippled
FILAMENT TYPE	CC-6
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DRAWN	R.AMPARO	08/26/99
			CHKD	D.GILCZYNSKI	08/26/99
			ENGR		
			MFG		
			QUAL		
			DSGN ACTVY		
			GOVT ACTVY		
MATERIAL			TITLE		
COMPOSITE			USHIO AMERICA, INC.		
			10550 Camden Dr. Cypress, CA 90630		
			EPX, JCR14.5V-90W HALOGEN LAMP		
			SIZE	CODE IDENT NO.	DWG NO.
			B	EPX	1000349
			SCALE	WEIGHT	SHEET
			NONE		1 OF 1

NEXT ASSY	USED ON

APPLICATION