

4


3

DWG NO. 1000406 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

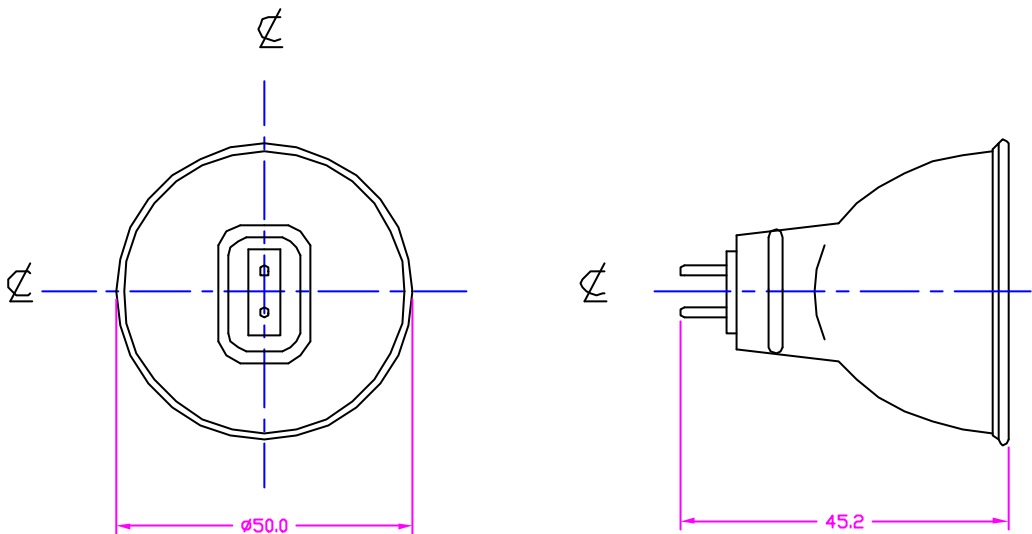

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM.
 - 2. SEAL TEMP; SHOULD BE MAINTAINED BELOW 350°C
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	50 W
COLOR TEMP	3050 K
AVERAGE LIFE	5000 HRS
BASE TYPE	GU5.3
BEAM ANGLE	36°
FILAMENT TYPE	C-8
BURN POSITION	Any

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO 11/08/99		
			CHKD D.GILCZYNSKI 11/08/99		
MATERIAL COMPOSITE			ENGR		
			MFG		
			QUAL		
FINISH			DSGN ACTVY		
			GOVT ACTVY		
			SIZE B	CODE IDENT NO. EXN	DWG NO. 1000406
			SCALE NONE	WEIGHT	SHEET 1 OF 1

4

3

2

1

CAD