

4


3

DWG NO. 1000418 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

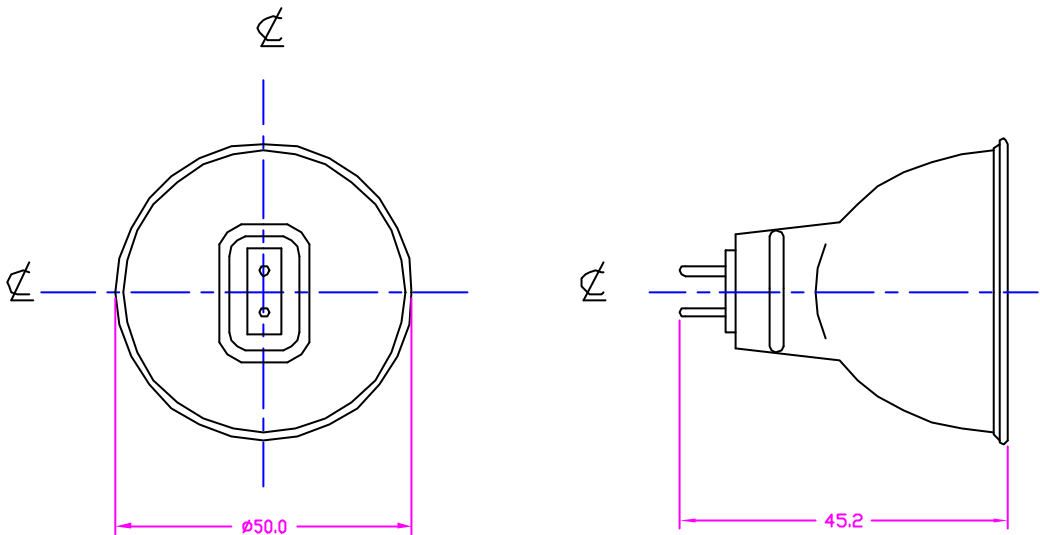

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	50 W
COLOR TEMP	3000 K
AVERAGE LIFE	3500 HRS
BASE TYPE	GU5.3
BEAM ANGLE	12°
FILAMENT TYPE	C-8
BURN POSITION	Any

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630			
	APPROVALS		DATE			
	DRAWN	R.AMPARO	11/08/99		TITLE EXT/C/A/FG HALOGEN LAMP	
	CHKD	D.GILCZYNSKI	11/08/99			
	ENGR					
	MFG					
	QUAL					
	MATERIAL COMPOSITE	DSGN ACTVY		SIZE	CODE IDENT NO.	DWG NO.
	FINISH			B	EXT	1000418
GOVT ACTVY		SCALE	WEIGHT	SHEET		
		NONE		1 OF 1		

4

3

2

1

CAD