


4

3

DWG NO. 1000419 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

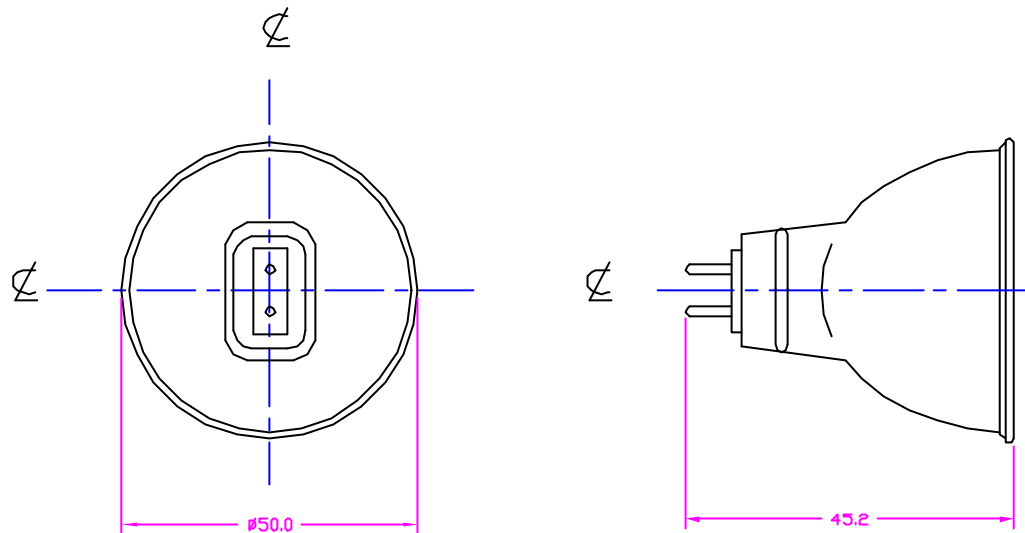

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS	
LIST OF MATERIALS						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10307 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630		
		APPROVALS				DATE
		DRAWN	R.AMPARO	12/20/99	TITLE EXT/FG HALOGEN LAMP	
		CHKD	D.GILCZYNSKI	12/20/99		
		ENGR				
		MFG				
		QUAL				
MATERIAL COMPOSITE		DSGN ACTVY		SIZE B	CODE IDENT NO. EXT	DWG NO. 1000419
FINISH		GOVT ACTVY		SCALE NONE	WEIGHT	SHEET 1 OF 1

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	50 W
COLOR TEMP	3000 K
AVERAGE LIFE	4000 HRS
BASE TYPE	GJ5.3
BEAM ANGLE	12°
FILAMENT TYPE	C-8
BURN POSITION	Any

4

3

2

1

CAD