


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

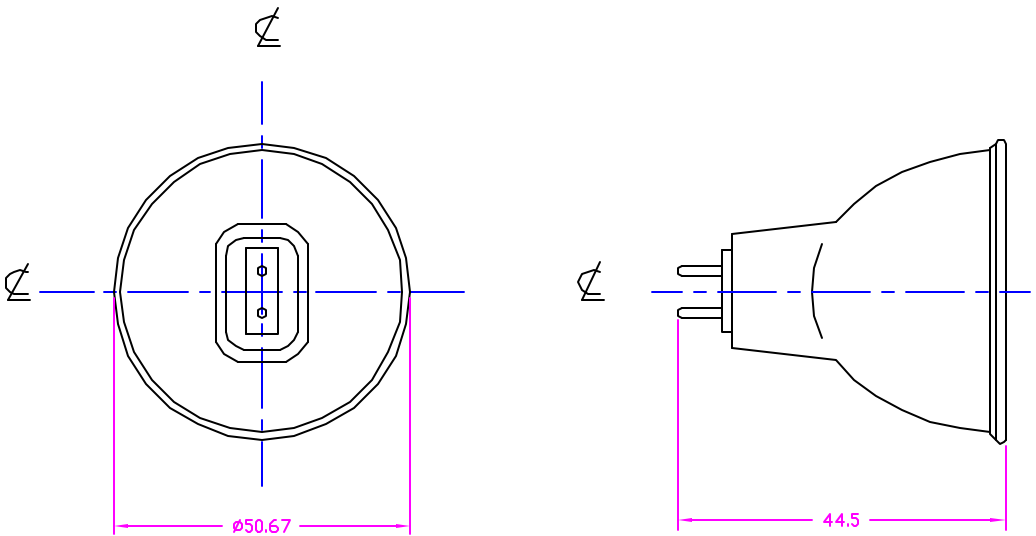

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 - 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	100 W
COLOR TEMP	3350 K
AVERAGE LIFE	50 HRS
BEAM ANGLE	27°
BASE TYPE	GX5.3
MAXIMUM CP	4500 cd
FILAMENT TYPE	C-6
BURN POSITION	BD/Hor

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO		
			CHKD D.GILCZYNSKI		
MATERIAL COMPOSITE			ENGR		
			MFG		
			QUAL		
			DSGN ACTVY		
			GOVT ACTVY		
FINISH			TITLE		
			EXV, JCR12V-100W HALOGEN LAMP		
			SIZE	CODE IDENT NO.	DWG NO.
			B	EXV	1000420
			SCALE	WEIGHT	SHEET
			NONE		1 OF 1

NEXT ASSY	USED ON

APPLICATION