

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com


Customer Name:
Project Name:
Fixture Type:



GE
Lighting

97569 - F13BX/835/ECO

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office;
Restaurant; Warehouse



GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	GX23
Wattage	13
Voltage	59
Rated Life	10000 hrs
Starting Temperature	0 °C (32 °F)
LEED-EB MR Credit	563 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	825
Mean Lumens	710
Nominal Initial Lumens per Watt	63
Color Temperature	3500 K
Color Rendering Index (CRI)	82

ELECTRICAL CHARACTERISTICS


Lamp Current	0.285 A
Current Crest Factor	1.7
Supply Current Frequency	60 Hz

DIMENSIONS

Maximum Overall Length (MOL)	7.3000 in(185.4 mm)
Nominal Length	7.000 in(177.8 mm)
Base Face to Top of Lamp	6.690 in(169.9 mm)

PRODUCT INFORMATION

Product Code	97569
Description	F13BX/835/ECO
ANSI Code	60901-IEC-0013-1
Standard Package	BUNDLE
Standard Package GTIN	
Standard Package Quantity	100
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	100
UPC	043168975698




CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

GRAPHS & CHARTS

Spectral Power Distribution

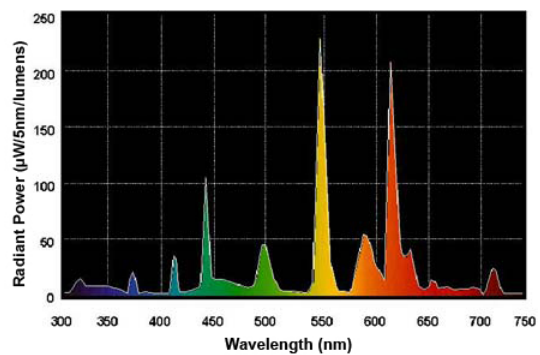

NOTES

- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life