
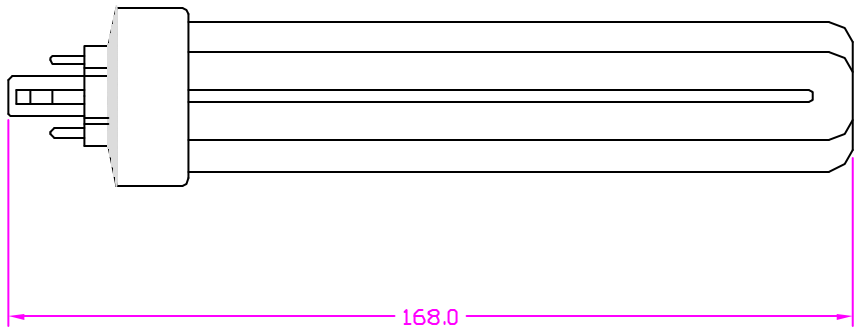


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED



- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
 2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	135 V
WATTAGE	42 W
CURRENT	0.320 A
COLOR TEMP	6500 K
CRI	B2
LUMENS	3040 Lm
ANSI SHAPE	T-4 TRIPPLE TUBE
BASE TYPE	CAP TYPE-GX24q-4
AVE. LIFE	10,000 HRS
ENVELOPE DIA	12.7
BURN POSITION	ANY

NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630 TITLE UFL-CF42TE/865 COMPACT FLUORESCENT	
MATERIAL COMPOSITE		APPROVALS			
FINISH		DATE			
		DRAWN R.AMPARO 03/30/01			
		CHKD K.CORDERO 03/30/01			
		ENGR		SIZE B	
		MFG		CODE IDENT NO.	
		QUAL		DWG NO. 3000226	
		DSGN ACTVY		SCALE NONE	
		GOVT ACTVY		WEIGHT	
				SHEET 1 OF 1	

4

3

1

D

D

C

C

B

B

A

A

4

3

2

1