

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com

Customer Name:
Project Name:
Fixture Type:



GE
Lighting

46704 - F28W/T5/830/ECO



GE Ecolux® Starcoat® T5

- Passes TCLP, which can lower disposal costs.

a product of
ecomagination™



High Color Rendering



CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Lamp Mortality

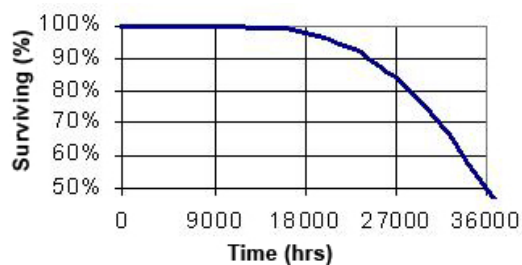

Lumen Maintenance

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T5
Wattage	Miniature Bi-Pin (G5)
Voltage	28
Rated Life	167
Rated Life (rapid start) @ Time	30000 hrs
	30000.0 @ 3.0/36000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature	-20 °C (-4 °F)
LEED-EB MR Credit	56 picograms Hg per mean lumen hour
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	2900
Mean Lumens	2660
Nominal Initial Lumens per Watt	103
Color Temperature	3000 K
Color Rendering Index (CRI)	85
S/P Ratio (Scotopic/Photopic Ratio)	1.3

ELECTRICAL CHARACTERISTICS


Open Circuit Voltage (rapid start) Min @ Temperature	425 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor	1.7

DIMENSIONS

Maximum Overall Length (MOL)	45.8000 in(1163.3 mm)
Nominal Length	45.200 in(1148.1 mm)
Bulb Diameter (DIA)	0.625 in(15.9 mm)
Bulb Diameter (DIA) (MAX)	0.625 in(15.9 mm)
Max Base Face to Base Face (A)	45.240 in(1149.1 mm)
Face to End of Opposing Pin (B) (MIN)	45.420 in(1153.7 mm)
Face to End of Opposing Pin (B) (MAX)	45.520 in(1156.2 mm)

PRODUCT INFORMATION

Product Code	46704
Description	F28W/T5/830/ECO
Standard Package	Case
Standard Package GTIN	10043168467046
Standard Package Quantity	40
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	40
UPC	043168467049

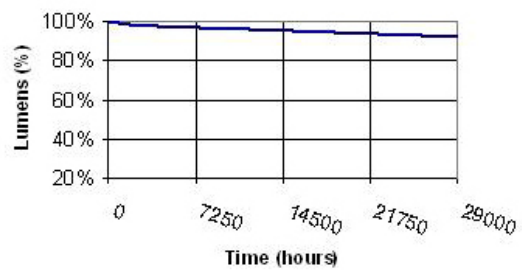

Spectral Power Distribution

