


Presented By: Candela Corporation
 Contact Phone: (800) 922-9226
 Contact E-mail: sales@candelacor.com

Customer Name:
 Project Name:
 Fixture Type:



GE
 Lighting

13699 - F72T12D/HO 15PK
 GE Daylight T12

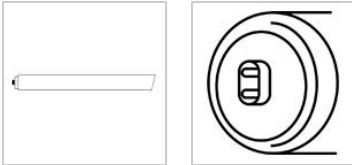

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Spectral Power Distribution

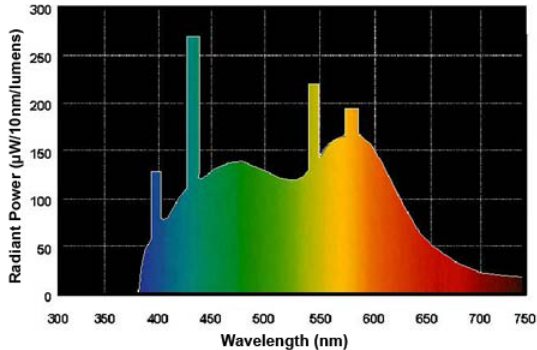

Lamp Mortality

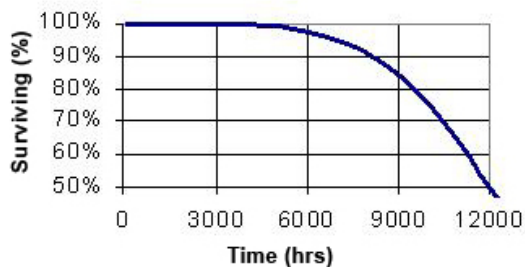

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
	Linear
Bulb	T12
Base	Recessed Double Contact (R17d)
Wattage	85
Voltage	117
Rated Life	12000 hrs
Bulb Material	Soda lime
Starting Temperature	-29 °C (-20 °F)
LEED-EB MR Credit	1613 picograms Hg per mean lumen hour

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	5350
Mean Lumens	4650
Nominal Initial Lumens per Watt	62
Color Temperature	6500 K
Color Rendering Index (CRI)	75

ELECTRICAL CHARACTERISTICS

Open Circuit Voltage (rapid start) Min @ Temperature	395 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor	1.7

DIMENSIONS

Maximum Overall Length (MOL)	69.9100 in(1775.7 mm)
Minimum Overall Length	69.7200 in(1770.9 mm)
Nominal Length	72.000 in(1828.8 mm)
Bulb Diameter (DIA)	1.500 in(38.1 mm)
Bulb Diameter (DIA) (MIN)	1.410 in(35.8 mm)
Bulb Diameter (DIA) (MAX)	1.500 in(38.1 mm)
End of Base Pin to End of Opposite Pin End (C)	69.720 in(1770.9 mm)

PRODUCT INFORMATION

Product Code	13699
Description	F72T12D/HO 15PK
ANSI Code	1016-1
Standard Package	Case
Standard Package GTIN	10043168136997
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168136990