


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

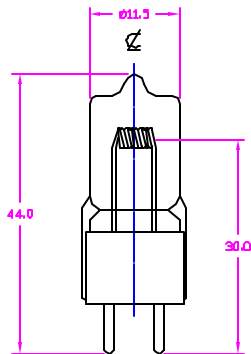

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		USHIO AMERICA, INC. 5440 Carritas Ave. Cypress, CA90630 TITLE FDx, Jc12V-100WCG2 HALOGEN LAMP
MATERIAL COMPOSITE			APPROVALS	DATE	
FINISH			DRAWN R.AMPARO	08/20/99	
APPLICATION			ENGR D.GILCZYNSKI	09/20/99	
NEXT ASSY			USED ON	SCALE	WEIGHT
APPLICATION			BDN ACTVY	BDT ACTVY	CODE IDENT NOS FDX
					DWG NO. 1000507
					SHEET 1 OF 1

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	100 W
TOTAL LUMEN	3500 Lm
COLOR TEMP.	3300 K
BASE TYPE	G16.35
AVERAGE LIFE	80 HRS
FILAMENT TYPE	Coar8
BURN POSITION	ANY